

HIGH PERFORMANCE **SEALING** SOLUTIONS

CATALOGUE



Schlegel

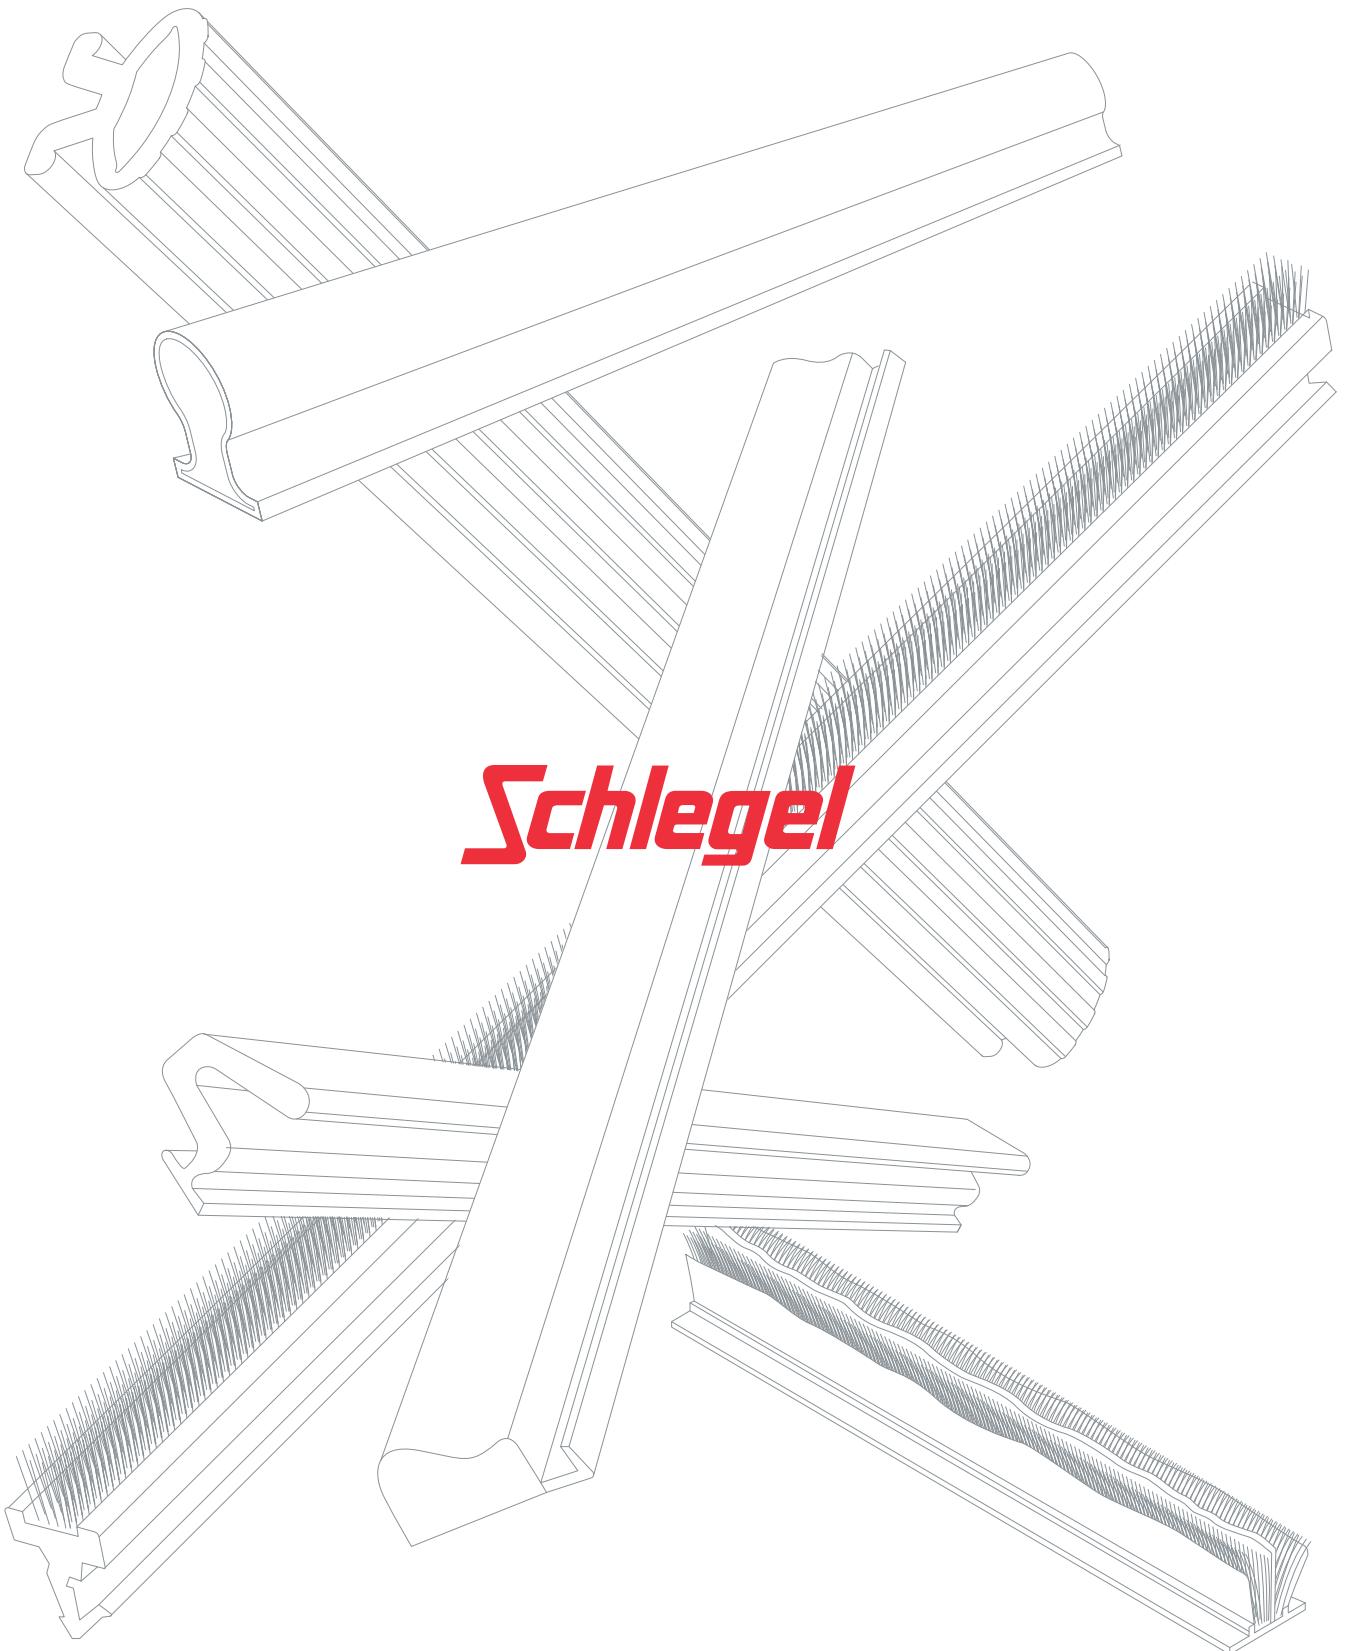


Table of Contents

The company	
Overlook	04
Quality products	05
The product range	
Quanex	06
Conformity to CE marking 2016	07
Other relevant standards	08
	09

Q-LON: polyurethane foam seals

For timber, aluminium and PVC applications

Materials and colours	12
Thermal conductivity	15
Classifications	16
Performance tables	17
Range overview	18
Certifications	23
Other certifications	24
Technical specifications	
Universal. Application on all surfaces	26
Interior design. Applications on timber doors and windows	28
Timber. Window applications	36
Aluminium. Door and window applications	42
PVCu. Door and window applications	46
Accessories	50
Instructions	51
Tools	51

Brush pile seals and sealing profiles

For timber, aluminium and PVC applications

Materials and colours	51
Selector	57
Air Permeability test	59
Quality control	61

Technical specifications

Brush pile seals	62
Poly-Bond (PB): woven brush pile seals	63
Fin-Seal (FS): woven brush pile seals	64
Dust-Plug (DP): woven brush pile seals	65
Shutter-Pile (SP): woven brush pile seals	66
Power-Pile (PW): extruded brush pile seals	67
Fin-Pile (FP): extruded brush pile seal	68
G3: extruded brush pile seals	69
G3-QF (Quadrafin): extruded brush pile seals	70
Bi-Fin (BF): extruded brush pile seals	71
Angle-Pile (AP): extruded brush pile seals	72
Skirting-Fringe (SF): extruded brush pile seals	73
Flex-Brush (FB): coilable brush pile seals	74
Kerf-Pile (KP): extruded brush pile seals	75
Combination brush pile seals	76
For universal surface fitting	77
For kerf-slot fitting	77
Carriers for brush pile seals	78

Extruded seals

For timber, aluminium and PVC applications

Materials and colours


82

Classifications

85

Technical specifications

Lozaron. Extruded profiles for timber doors and windows	86
Lozaron. Extruded profiles for aluminium doors and windows	88
Shutters and screens	92

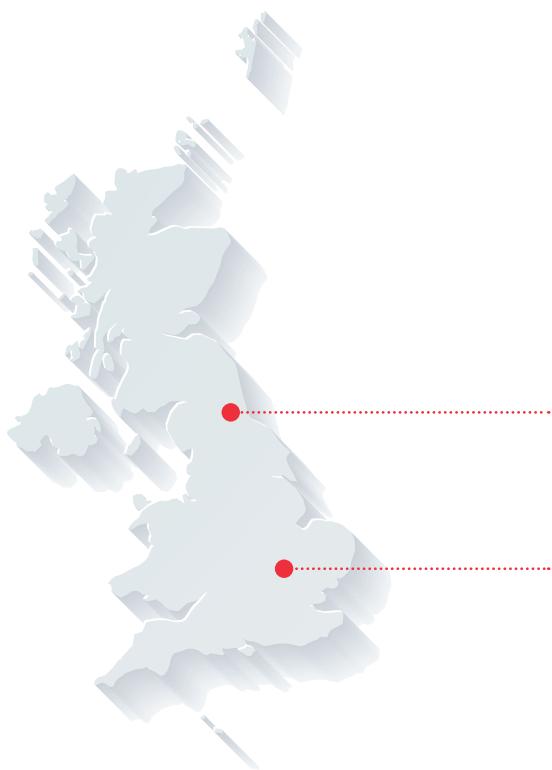

The company

Schlegel was founded in Rochester, USA, in 1885 as a textile company. In 1930, it began producing brush seals and sealing profiles for buildings, before introducing foam seals in the 1960s.

Newton Aycliffe

Manufacturing site for brush pile, extruded and foam seals.

Henlow

Manufacturing site for foam seals.

ISO 9001 certified

ISO 14001 certified

1885

Schlegel is founded in Rochester, USA, as a textile company.

1950

Start of production of brush pile seals and profile seals for buildings.

1988

Schlegel has production facilities in 12 countries and 22 branches worldwide.

2016

Schlegel acquires Italian Hardware manufacturer, Giesse.

Schlegel consolidates all weatherseal manufacturing into the UK.

2022

Acquisition of Vedasil in Brazil.

2014

Developed moulded urethane foam weatherseal.

1960

The company starts producing trimmings for carriages, baskets and clothing.

1930



Quality products

Schlegel has an unrivalled reputation for high quality, service and technical innovation. The company has established itself as a world leader in the manufacture of seals, weatherstrips, gaskets and extrusions.

All products are manufactured to meet the requirements of current and proposed British, European and International Standards and are manufactured using a Quality Management System registered and certified to BS EN ISO 9001:2015 Quality Systems.

European standards require all components of each window and door to be tested with a view to

constant functional quality, regardless of the type of product and the profile on which it is applied. Each component is subjected to internal testing to verify its actual performance level or directly certified by institutes authorised to the highest levels required by the regulations (i.e. IFT Z-CERT QM338). The auditors of these institutes perform a periodic review of the effectiveness of the production plant control in order to ensure continual quality improvement. All the raw materials (polypropylene, TPE, PVC, polyurethane, etc.) are subjected to chemical composition checks that guarantee constant performance as required by the reference standards.



Selecting a seal material and design

The selection of a suitable seal product is dependent on the performance characteristics required for the door, window, skylight, shutter or curtain wall in the application for which it has been designed.

A great deal of guidance can be gained from the classification under EN 12365-1 2003, which should always be checked.

For thermal conductivity of the seal as an element

of the overall construction of the window or door, reference can be made to table 1 of EN 12524 2000 or by direct calculation.

Schlegel can support all product design, manufacturing and installation teams with the specification and supply of a seal to meet their specific application requirements, and to support compliance with the required product standards.



The product range

Materials, technologies and designs

In order to cover all normal applications for windows, doors, shutters and curtain walling, Schlegel offers the widest range of weatherstripping materials and technologies available.



Q-LON polyurethane foam weatherseals

A combination of polyurethane, polypropylene (or polycarbonate) insert and polyethylene liner makes Q-LON one of the best weatherseals in the world. Suitable for timber, PVC and aluminium windows and doors in compression and sliding applications.

Polypropylene brush pile seals

Primarily for sliding applications, pile weatherseals are produced in a number of formats to suit varying performance and application requirements.



Extruded seals

Extruded weatherseals designed to meet specific needs for timber, PVC and aluminium framed windows and doors. Products can include variable hardness and foam TPE elements to deliver superior performance.



Quanex

Schlegel is a part of Quanex.

Quanex is a global, publicly traded manufacturing company serving OEMs across industries like fenestration, cabinetry, solar, and outdoor products. Quanex is dedicated to innovation, improving product performance, and helping customers succeed.

From the Dubai skyline to neighborhood homes, Quanex delivers high-quality building components that make products—and businesses—better. Solutions include insulating glass spacers, vinyl profiles, and cabinet components, all designed with sustainability and efficiency in mind.

Globally trusted and driven by innovation, Quanex is ready to shape a brighter future with you and be *A Part of Something Bigger.SM*.



7,100+
EMPLOYEES



1927
YEAR FOUNDED



HOUSTON, TX
CORPORATE HEADQUARTERS

90+
COUNTRIES SERVED

67
GLOBAL LOCATIONS

Q-LON

Brush pile

Extruded

CE conformity

Enabling a window or door to meet the requirements for CE marking 2016

The Construction Products Regulation came into force on 1st July 2013, and requires that manufacturers, who place construction products covered by a harmonised European standard on the market within the European Economic Area (EEA), apply a CE mark and produce a Declaration of Performance (DOP) for their products.

CE marking is not applied to windows and doors in all applications in all countries across Europe, but still provides consumers with the confidence in the performance of the products they purchase. In order to CE mark a window or a door, the manufacturer is reliant on their component suppliers to provide declarations of performance to support their claims.

As already mentioned, weatherstrips and gaskets are critically important in the performance of the installed window and therefore door and window manufacturers must choose components from suppliers capable of demonstrating and certifying that the required standards are met or even exceeded.

All external windows and doors across Europe must meet the performance requirements of EN 14351-1 2016. A suitable gasket and/or weatherstrip is an essential component in meeting these performance requirements.

The standard requires that all sellers of complete window, door, shutter and curtain walling assemblies make certain declarations on the performance of their products. In most countries this is done in the form of a CE (Conformité Européenne) mark. This relates to weatherstrips and gaskets in two main ways:

- That the materials they are made from are not hazardous in terms of the emission and/or migration of dangerous substances as required by EN 14351-1 2016 clause 4.6.
- That the seal meets the performance requirements under EN 12365-1 2003 as required by EN 14351-1 2016 clause 4.15.

The ultimate method of demonstrating performance compliance is to practically test each window and door in all relevant configurations with the specified components.

This may not be practical in all cases but EN 12365 2003 provides a method by which the relative performance of different weatherstrips and gaskets may be assessed and compared. Window and door manufacturers should also note that...

...a further requirement of clause 4.15 is that weatherstrips or gaskets should be replaceable...

...to ensure the long term serviceability of the door or window. Compliance can normally be demonstrated by ensuring that the seal is located in a pocket or kerf slot in the profile and can therefore be removed and replaced.



Schlegel Products

To help establish compliance with EN 14351-1 2016, your seal manufacturer needs to make some compliance declarations. Here are the declarations for Schlegel products.

Compliance with clause 4.6: Dangerous substances

In accordance with the requirements of Annex I of regulation No. 305/2011 of the European Parliament and clause 4.6 (Dangerous Substances) of EN 14351-1 2016 + A1: 2010, we confirm that there are no materials liable to emission or migration during the normal intended use of products supplied by SchlegelGiesse, that are potentially dangerous to hygiene, health or the environment.

**CE**

Other relevant standards

There are a number of other European standards that cover more general requirements of windows and doors as a whole in specific areas of performance. These should be referred to separately.

EN 12207 2000 – Air Permeability

EN 12208 2000 – Water Tightness

EN 12567 2000 – Thermal Conductivity

EN 13115 2001 – Operating Forces

EN ISO 10140-2 – Acoustic Performance

Compliance with clause 4.15: Durability

In accordance with clause 4.15, the long term water tightness and air permeability characteristics of an external door, window or roof light are dependent upon the weatherseals.

This clause requires that weather seals comply with the relevant European standard, in this instance, EN 12365-1 2003 (Building hardware. Gasket and weather stripping for doors, windows, shutters and curtain walling. Performance requirements and classification).

Q-LON

Polyurethane foam seals

For timber, aluminium
and PVC applications



Index

Materials and colours	12
Thermal conductivity	15
Classifications	16
Performance tables	17
Range overview	18
Certifications	23
Other certifications	24
Technical specifications	
Universal. Application on all surfaces	26
Interior design. Applications on timber doors and windows	28
Timber. Window applications	36
Aluminium. Door and window applications	42
PVCu. Door and window applications	46
Accessories	50
Instructions	51
Tools	51



The Original One

The Schlegel Q-LON gasket, proudly **Made in the UK**, is crafted from a unique polyurethane foam encased in a weather-resistant polyethylene liner.

As the original innovation of its kind, Q-LON sets the standard for quality and performance in sealing solutions.


Q-LONs do not contain SVHC (Substances of Very High Concern) in a concentration above 0.1 % by weight.



Foam

Polyurethane (PU) foam core

High durability, superior recovery performance.

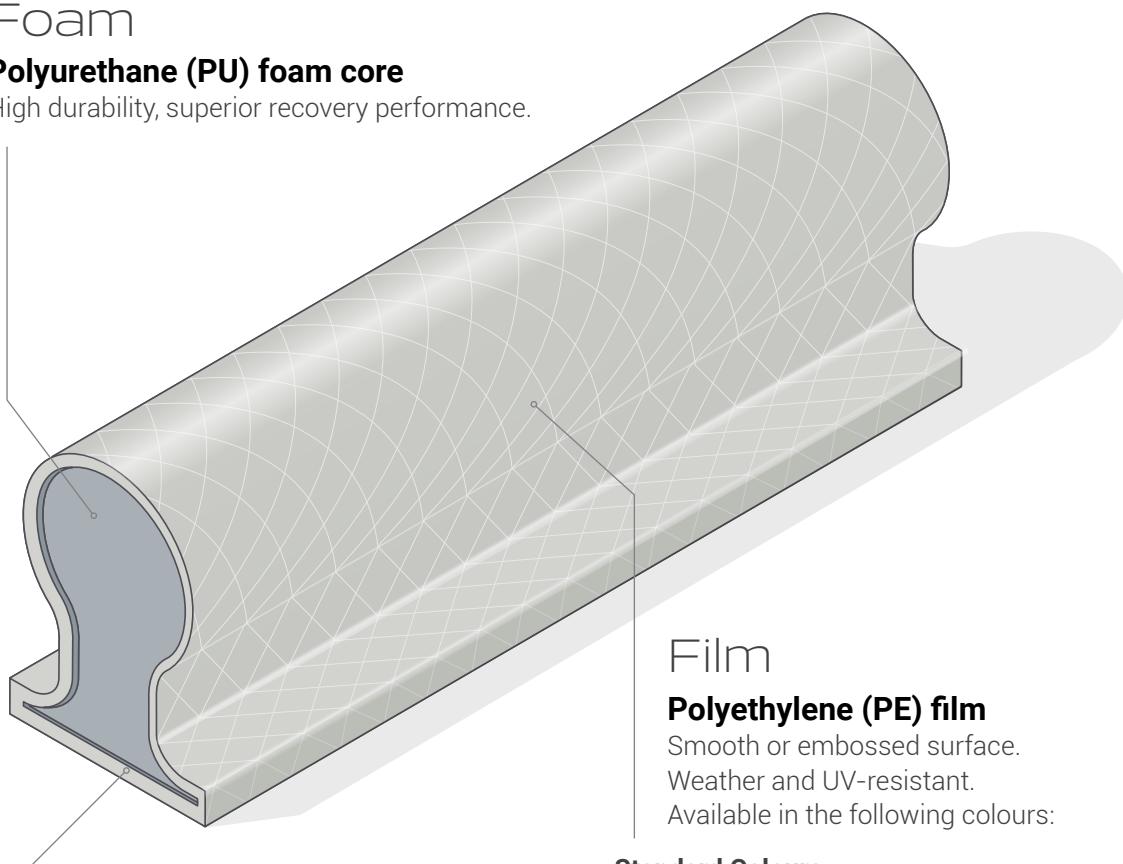

Insert

Polypropylene (PP), polycarbonate or with glass fibre cord

Prevents elongation and shrinkage.

Film

Polyethylene (PE) film

Smooth or embossed surface.

Weather and UV-resistant.

Available in the following colours:


Standard Colours

- WHITE / RAL 9003 / **Code 222**
- SILVER / RAL 7001 / **Code 212**
- BROWN / RAL 8019 / **Code 220**
- BLACK / RAL 9005 / **Code 223**

Extra Colours

- BEIGE / RAL 1001 / **Code 211**
- LIGHT OAK / RAL 8003 / **Code 217**
- FAWN BROWN / RAL 8007 / **Code 218**
- PURE WHITE / RAL 9010 / **Code 221**
- LIGHT GREY / RAL 7035 / **Code 215**
- PEBBLE GREY / RAL 7032 / **Code 252**
- GRAPHITE GREY / RAL 7024 / **Code 214**

EVERLASTING

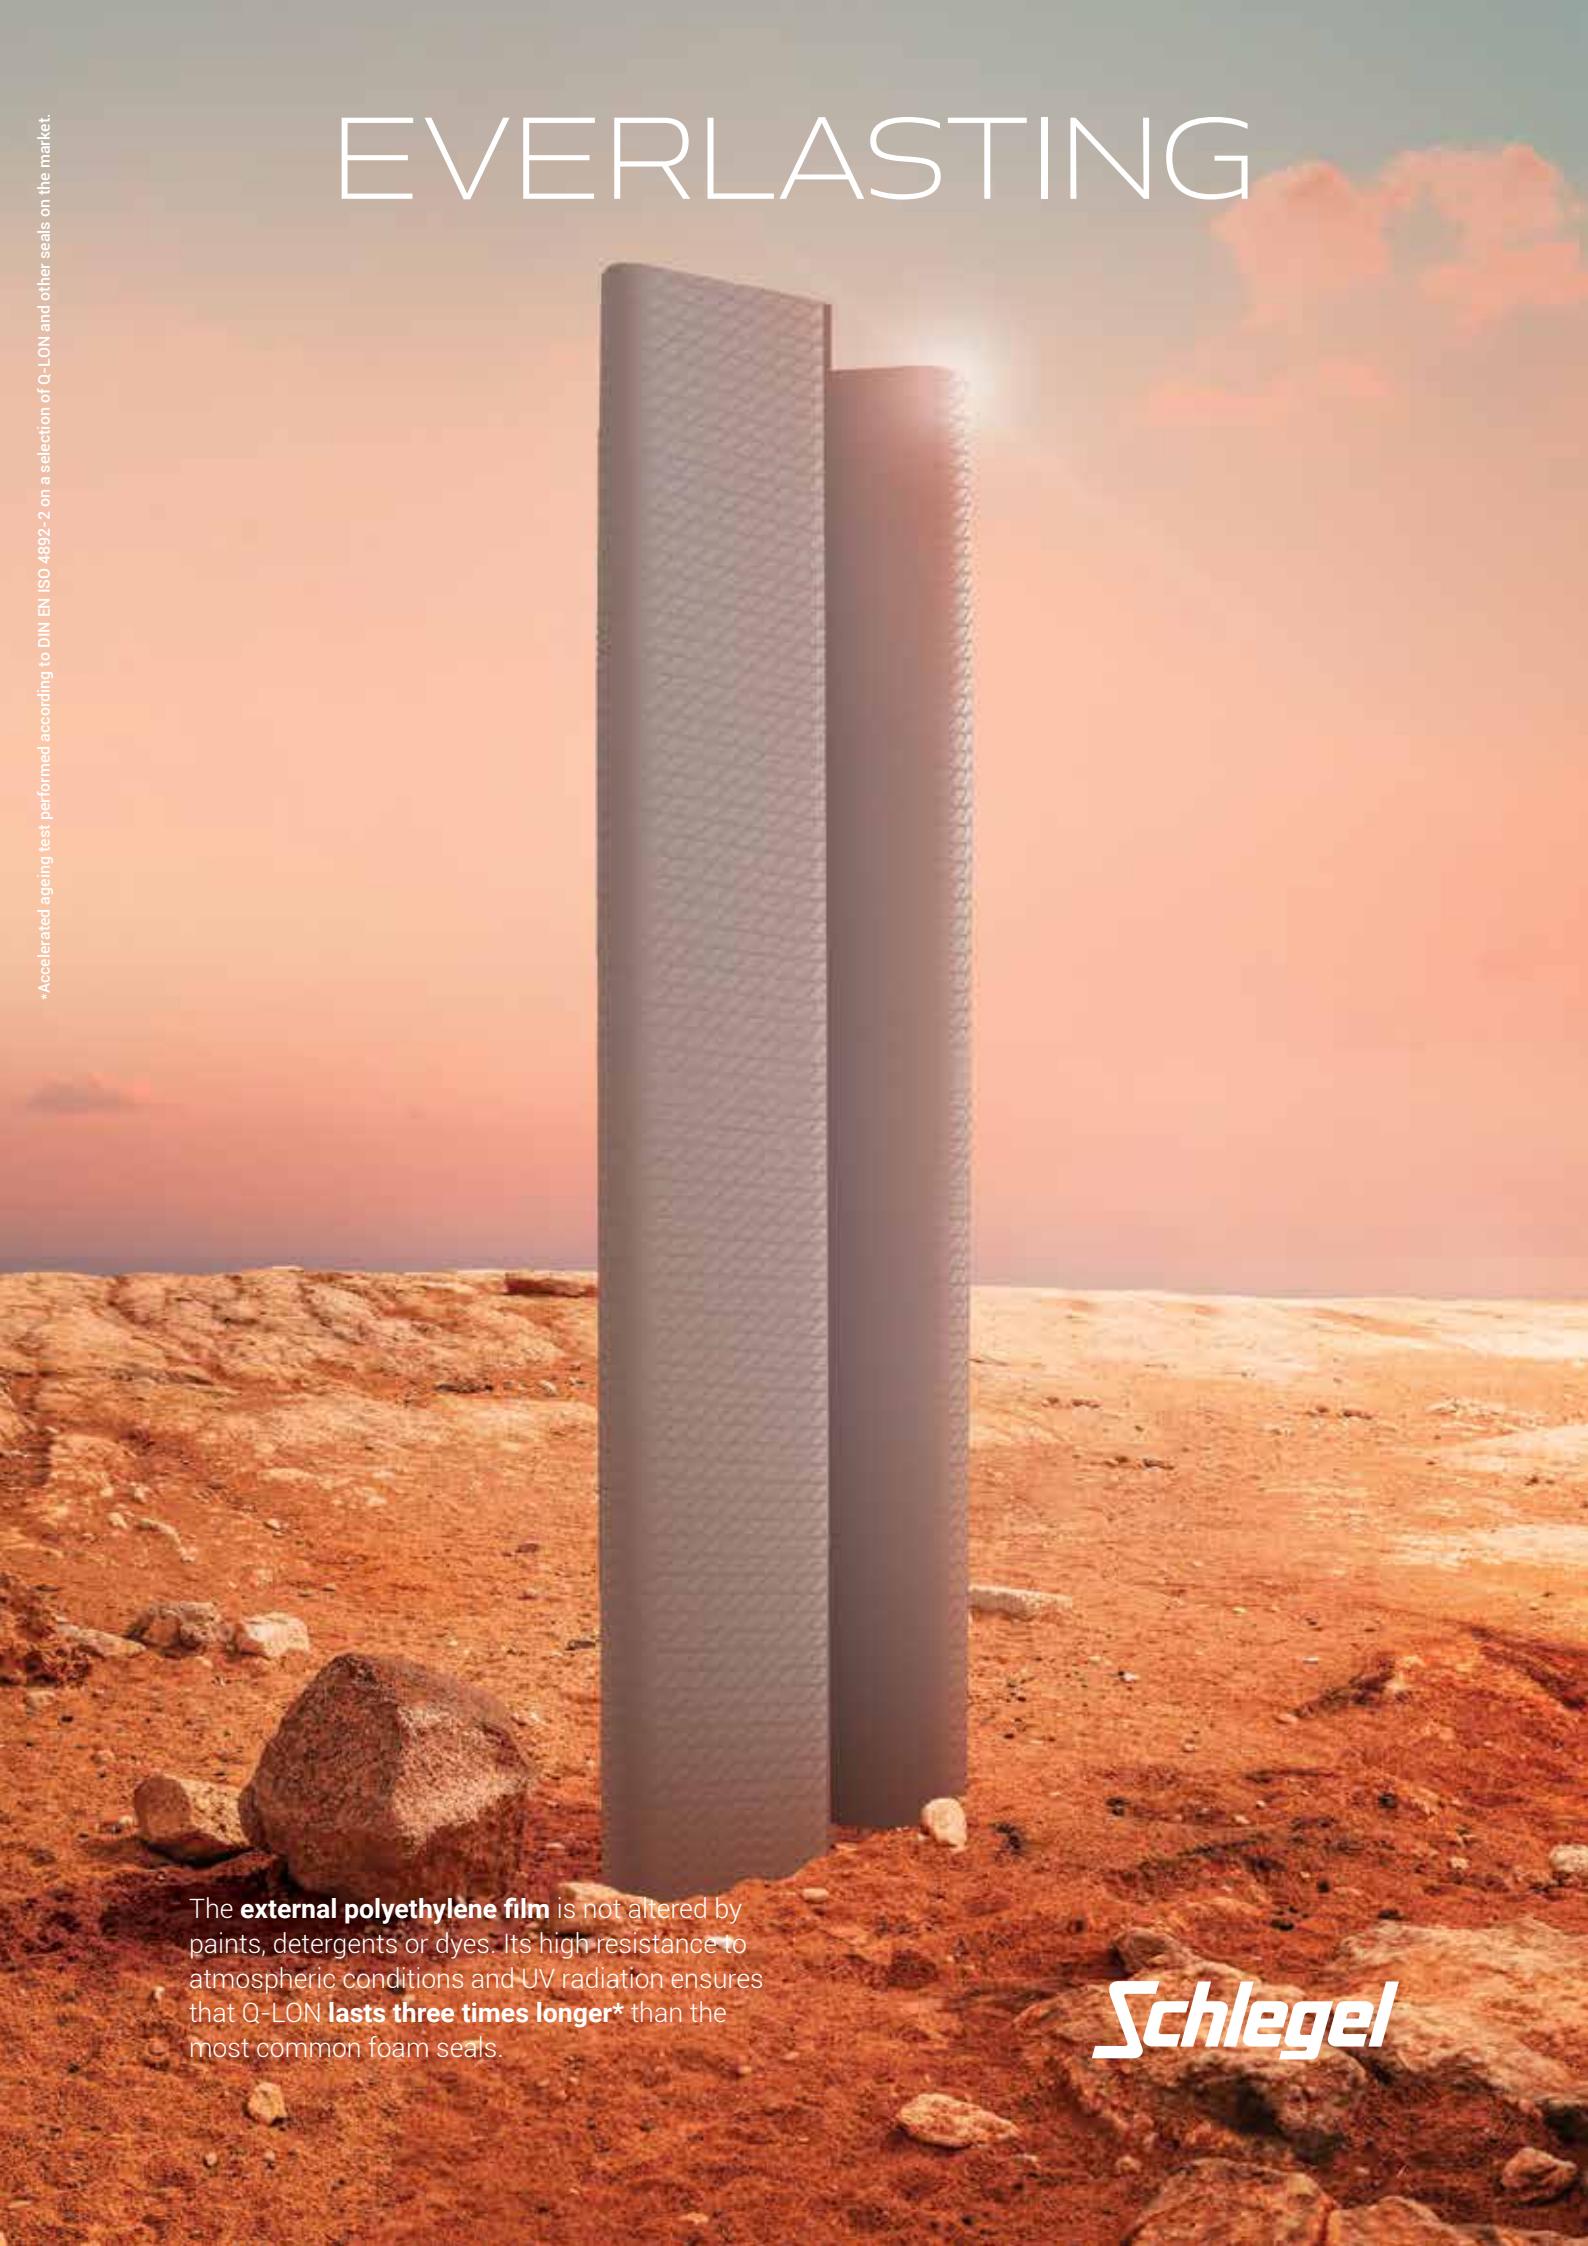

*Accelerated ageing test performed according to DIN EN ISO 4892-2 on a selection of Q-LON and other seals on the market.

The **external polyethylene film** is not altered by paints, detergents or dyes. Its high resistance to atmospheric conditions and UV radiation ensures that Q-LON **lasts three times longer*** than the most common foam seals.

Schlegel

VERY LOW THERMAL CONDUCTIVITY

Q-LON polyurethane seals offer the **lowest thermal conductivity** on the market (**0.04 W/m·K at 0°C**),
3 to 6 times better than other materials.

Schlegel

Thermal conductivity

To EN ISO 10077-1 2006 and EN 12524 2012

The unique Q-LON seal is made from a special polyurethane foam, contained in a weather resistant polyethylene liner.

Thermal conductivity

Section 4.12 of EN 14351-1 2006 stipulates the methods for determining thermal transmittance of windows and doors that can be used for EC Declarations of Performance. Common window configurations can use standard tables within EN 10077-1 2006 for declared thermal performance values, though more accurate values can be obtained by individual calculation or hot box testing. In accordance with 4.12 of EN 14351-1, calculations used for declaring thermal transmittance should be conducted in accordance with the methodology stipulated in EN ISO 10077-1 2006 and EN ISO 10077-2 2012. EN ISO 10077-2 2012 details the process for the calculation of frame element of windows, and doors, including weather seals and gaskets. For thermal calculations, it is necessary to understand the linear thermal transmittance, or thermal conductivity, of the individual frame component materials. Section 5.1 of EN ISO 10077-2 2012 refers to a further standard, EN ISO 10456 2007, as a suitable source of tabulated performance values for a variety of building materials.

Which seal has the lowest conductivity?

Table 3 of EN ISO 10456 2007 details polyurethane foam weather seals with a linear thermal transmittance of 0.05 W/(m.K). This should be the value used for Q-LON seals within window and door specifications, when calculating thermal performance declarations in compliance with the requirements of EN 14351-1 2006.

The material performance values within **Table 1 of EN ISO 10456 2007 also highlight the superior thermal performance of Q-LON.**


There is a proverb that says: a chain is only as strong as its weakest link. This also applies to the fenestration industry. Doors and windows only perform as well as the seal. The thermal performance that can be achieved by a window or door is determined by many different factors.

The composition of the frame material and the glass are both very important. A low quality seal, however, can easily spoil the energy saving effects of insulated profiles and argon filled HR glass. Under EN ISO 10456:2007, the design thermal conductivity of different materials used for seals is detailed thus:

- EPDM 0.25 W/(m·K)
- PVC 0.14 W/(m·K)
- PU 0.05 W/(m·K)

In accordance with EN 12667 (Thermal performance of building materials and products - Determination of thermal resistance by means of guarded hot plate and heat flow meter methods), it now has been independently tested and certified by ift Rosenheim: Q-LON has a measured low thermal conductivity of **just 0.04 W/(m·K).**

This is better than any other weather seal available in the market. Compared to other seals, energy loss is minimised. In combination with an excellent high compression recovery (on average higher than 90%) a high performance is also guaranteed over the long term.

Evidence of Performance Thermal conductivity (declared value)		
Test Report No. 15-003940-PR01 (PB-K03-06-en-02)		
Client	SCHLEGEI GERMANY GMBH Bredowstr. 33 22113 Hamburg Germany	Basis "i" EN 12667 2001-01 EN ISO 10456:2009-12
Product	Flexible polyurethane foam boards "Q-Lon Platten"	Test report 15-003940-PR01 (PB-K03-06-en-03) dated 27.07.2016 Equivalent national version (e.g. DIN EN)
Performance-relevant product details	Dimensions: width x height in mm approx. 256 x 255; Material: Flexible polyurethane foam based on polyol, both sides with polyethylene facing / 95 µm; Foaming agent: water / carbon dioxide; Density in kg/m³: 125 to 130; Closed pore struc- ture; open porosity: 10%; Seals for windows, doors	Representation 
Conditioning	After delivery, the test specimens were conditioned at 23°C / 50 % relative humidity until achieving constant mass (0.1 % / 24 h).	Instructions for use The test report serves to demon- strate the thermal conductivity (declared value) λ_{Dc} .
Special features	The test specimens were characterised by unevenness resulting from the manufacturing process.	Validity The data and results given refer solely to the tested and de- scribed specimen. This test!
Results	 $\lambda_D = 0.041 \text{ W}/(\text{m} \cdot \text{K})$	* The thermal conductivity was determined at an average temperature of 10°C.



Classifications

Of weatherseals according to EN 12365 2003

Under EN 12365 2003 there is a prescribed classification system that enables window, door, shutter and curtain walling manufacturers or installers to ensure that they are using the component that best meets their requirements.

A six-digit system is used

1	2	3	4	5	6
Category of use	Working range	Linear compression force	Working temperature range	Deflection recovery	Recovery after ageing
W = Weatherstrip G = Gasket	9 grades showing the working range of the seal; 9 indicates the greatest distance	9 grades showing the linear compression force; 9 indicates the greatest force	6 grades showing the working temperature range, each with different high and low temperatures	8 grades showing deflection recovery; grade 0 indicates no requirement and grade 7 shows the greatest recovery	8 grades showing recovery after ageing; grade 0 indicates no requirement and grade 7 shows the greatest recovery

Grades

1: ≤ 1 mm 2: >1 mm ≤ 2 mm 3: >2 mm ≤ 4 mm 4: >4 mm ≤ 6 mm 5: >6 mm ≤ 8 mm 6: >8 mm ≤ 10 mm 7: >10 mm ≤ 15 mm 8: >15 mm ≤ 30 mm 9: >30 mm	1: ≤ 10 N/m 2: >10 N/m ≤ 20 N/m 3: >20 N/m ≤ 50 N/m 4: >50 N/m ≤ 100 N/m 5: >100 N/m ≤ 200 N/m 6: >200 N/m ≤ 500 N/m 7: >500 N/m ≤ 700 N/m 8: >700 N/m ≤ 1000 N/m 9: >1000 N/m	1: 0°C to +45°C 2: -10°C to +55°C 3: -20°C to +85°C 4: -25°C to +100°C 5: -40°C to +70°C 6: 0°C to +200°C	0: No requirements 1: >30% to 40% 2: >40% to 50% 3: >50% to 60% 4: >60% to 70% 5: >70% to 80% 6: >80% to 90% 7: >90%	0: No requirements 1: >30% to 40% 2: >40% to 50% 3: >50% to 60% 4: >60% to 70% 5: >70% to 80% 6: >80% to 90% 7: >90%
--	--	--	---	---

A typical classification looks like this

W	4	3	2	7	6
---	---	---	---	---	---

Q-LON consistently delivers the highest levels of performance

Deflection recovery	Recovery after ageing
---------------------	-----------------------





Performance tables

The methodology for the linear compression test, the deflection recovery test and the recovery after ageing test are all described in EN 12365 2003 parts 2, 3 and 4.

The Schlegel testing facilities in Aycliffe are accredited by ift Rosenheim.

Q-LON classification to EN 12365 2003

QL 1026	W	2	6	2	7	6
QL 1032	W	3	5	2	7	6
QL 3004	W	2	6	2	7	6
QL 3005	W	3	5	2	6	6
QL 3006	W	6	2	2	7	6
QL 3009	W	3	2	2	6	6
QL 3011	W	3	5	2	7	6
QL 3012	W	4	5	2	7	6
QL 3013	W	1	5	2	7	6
QL 3020	W	4	4	2	6	6
QL 3025	W	2	5	2	6	6
QL 3034	W	3	6	2	7	6
QL 3037	W	3	5	2	6	6
QL 3042	W	2	4	2	7	6
QL 3053	W	3	5	2	6	6
QL 3054	W	3	5	2	7	6
QL 3056	W	3	4	2	7	5
QL 3059	W	3	3	2	6	5
QL 3061	W	3	3	2	6	6
QL 3063	W	3	6	2	6	6
QL 3067	W	3	5	2	7	6
QL 3068	W	3	5	2	7	5
QL 3070	W	2	5	2	6	6
QL 3072	W	2	4	2	6	5
QL 3073	W	4	4	2	7	5
QL 3074	W	2	6	2	7	6
QL 3076	W	3	4	2	6	6
QL 3078	W	3	3	2	6	6
QL 3079	W	2	4	2	6	6
QL 3082	W	3	5	2	7	5
QL 3091	W	4	4	2	6	5
QL 3093	W	4	4	2	6	6
QL 3094	W	3	2	2	6	5
QL 3095	W	3	2	2	7	5
QL 3096	W	3	3	2	6	5
QL 3097	W	3	5	2	6	6
QL 3098	W	3	3	2	6	6
QL 3099	W	3	3	2	6	6
QL 3101	W	3	5	2	7	6
QL 3102	W	3	3	2	6	6
QL 3104	W	4	4	2	7	5
QL 3106	W	2	5	2	7	6
QL 3109	W	4	3	2	7	6
QL 3110	W	2	5	2	6	6
QL 3111	W	3	5	2	5	6
QL 3113	W	3	5	2	6	6
QL 3116	W	3	4	2	6	6
QL 3117	W	2	3	2	6	6
QL 3118	W	3	1	2	7	6
QL 3121	W	3	2	2	6	6
QL 3122	W	1	7	2	7	6
QL 3124	W	1	6	2	7	6
QL 3126	W	1	7	2	7	6
QL 3128	W	3	2	2	6	5
QL 3131	W	2	5	2	6	6
QL 3138	W	2	5	2	7	6
QL 3139	W	3	1	2	7	6
QL 3140	W	3	5	2	6	6
QL 3141	W	3	5	2	5	5
QL 3141	W	2	4	2	5	5
QL 3143	W	2	6	2	7	5
QL 3147	W	3	4	2	6	6
QL 3150	W	3	3	2	6	6
QL 3151	W	3	3	2	6	6
QL 3152	W	3	3	2	6	6
QL 4465	W	2	5	2	6	6
QL 45	W	2	7	2	7	6
QL 46105	W	3	6	2	7	6
QL 46800	W	2	5	2	6	6
QL 48400	W	1	6	2	6	6
QL 48510	W	1	5	2	5	6
QL 48650	W	2	5	2	5	6
QL 4870	W	2	3	2	6	6
QL 48700	W	3	3	2	7	6
QL 48750	W	2	5	2	6	6
QL 48800	W	3	4	2	7	6
QL 48950	W	3	4	2	6	6
QL 50	W	2	5	2	7	6
QL 55	W	2	5	2	6	6
QL 5570	W	2	4	2	6	6
QL 5626	W	3	3	2	5	6
QL 5694	W	4	3	2	6	6
QL 57700	W	2	5	2	6	6
QL 5878	W	2	5	2	4	6
QL 60	W	3	5	2	7	6
QL 6571	W	3	5	2	6	6
QL 6750	W	3	4	2	6	6
QL 69400	W	1	5	2	5	6
QL 69510	W	1	5	2	4	6
QL 69650	W	1	5	2	6	6
QL 69700	W	3	3	2	7	6
QL 69750	W	2	4	2	6	6
QL 69800	W	3	4	2	6	6
QL 6991	W	2	5	2	6	6
QL 69950	W	3	4	2	6	6
QL 7000	W	5	2	2	6	6
QL 70012	W	3	2	2	6	6
QL 70013	W	3	2	2	6	6
QL 70014	W	3	4	2	7	6
QL 7066	W	3	3	2	6	6
QL 7307	W	3	5	2	7	6
QL 836	W	3	3	2	6	6
QL 9005	W	2	4	2	6	6
QL 9100	W	3	5	2	7	6
QL 9111	W	3	4	2	6	6
QL 9112	W	3	5	2	7	6
QL 9154	W	3	5	2	6	6
QL 9171	W	2	5	2	6	6
QL 9257	W	3	3	2	7	6
QL 9489	W	2	6	2	7	6
QL 9536	W	4	3	2	7	6
QL 9596	W	2	6	2	7	6
QL 9646	W	3	5	2	7	6
QL 9608	W	3	3	2	7	6
QL 9613	W	3	3	2	7	6
QL 9688	W	3	3	2	7	6
QL 9898	W	3	5	2	7	6
QL 9926	W	3	3	2	7	6
QL 9928	W	3	4	2	7	6
QL 9985	W	3	5	2	7	6

Q-LON

Brush pile

Extruded



Q-LON

Brush pile

Extruded

Range overview

Universal surface fitting

Code	Width	Height	Dimensions (mm)	
			Seal	Application
Taped				
QL 1026	12.0	4.0	12.0	1.0 - 3.0
QL 1032	12.0	7.0	12.0	2.0 - 6.0
QL 3116	10.8	8.7	11.0	3.0 - 5.5
QL 3117	11.2	6.5	11.0	3.0 - 5.5
QL 3121	15.0	12.0	15.0	5.0 - 10.0
QL 3122	7.0	2.2	7.0	0.5 - 2.0
QL 3124	6.4	3.7	6.0	2.5 - 3.5
QL 3126	10.0	3.0	10.0	1.0 - 2.5
QL 9171	8.0	6.0	8.0	4.5
Untaped				
QL 3042	11.2	6.5	11.0	3.0 - 5.5
QL 3059	10.8	8.7	11.0	3.0 - 5.5
QL 3061	15.0	12.0	15.0	5.0 - 10.0
QL 9171	8.0	6.0	8.0	4.5

Interior design (timber doors and furniture)

Location	Dimensions (mm)		Seal gap
	Groove	Depth	
QL 3006	2.7 - 3.0	6.0	5.0 - 13.0
QL 3009	2.7 - 3.0	6.0	4.0 - 7.5
QL 3011	2.7 - 3.0	6.0	3.5 - 5.5
QL 3012	2.7 - 3.0	6.0	4.0 - 6.5
QL 3013	2.7 - 3.0	6.0	2.0 - 3.0
QL 3034	2.7 - 3.0	8.0	0.0 - 1.5
QL 3070	2.7 - 3.0	8.0	0.0 - 1.5
QL 3073	4.0 - 5.0	7.5	5.0 - 8.0
QL 3074	2.7 - 3.2	6.5	3.5 - 5.5
QL 3077	2.7 - 3.0	6.0	2.0 - 3.0
QL 3078	3.0 - 3.3	6.0	4.0 - 7.5
QL 3079	3.2 - 4.0	6.5	2.7 - 4.3
QL 3093	2.7 - 3.0	7.0	4.0 - 8.0
QL 3095	3.5 - 4.0	6.5	4.0 - 6.0
QL 3096	4.0 - 5.0	7.5	3.0 - 6.0
QL 3098	3.0 - 4.0	7.5	3.0 - 6.0
QL 3099	3.0 - 3.3	6.0	4.0 - 7.5
QL 3102	3.7 - 4.2	7.0	5.0 - 7.5
QL 3104	4.0 - 5.0	7.5	5.0 - 9.0
QL 3109	4.0 - 5.0	7.0	5.0 - 9.0
QL 3118	3.0 - 3.3	7.0	4.0 - 7.5
QL 3128	2.7 - 3.0	7.0	4.0 - 7.5
QL 3131	2.7 - 3.0	8.0	0.0 - 1.5
QL 3139	2.7 - 3.0	7.0	4.0 - 7.5
QL 5626	2.7 - 3.0	6.0	4.7 - 7.5
QL 5694	2.7 - 3.0	6.0	6.0 - 11.0
QL 7000	2.7 - 3.0	6.0	4.0 - 10.8
QL 7066	2.7 - 3.0	6.0	4.8 - 7.7
QL 9111	3.0 - 3.3	6.0	4.8 - 7.9
QL 9480	2.7 - 3.0	6.0	3.5 - 7.0

Interior design (timber doors and furniture)

Code	Dimensions (mm)		Rebate	Seal gap
	Groove	Min. depth		
QL 50	2.7 - 3.0	6.0	10.0	3.0 - 5.0
QL 55	2.7 - 3.0	6.0	10.0	3.0 - 4.5
QL 60	2.7 - 3.0	6.0	10.0	3.0 - 4.5
QL 3037	2.7 - 3.0	6.0	10.0	3.5 - 5.6
QL 3056	2.7 - 3.0	6.0	9.0	4.0 - 7.5
QL 3072	2.7 - 3.2	6.5	10.0	2.7 - 4.3
QL 3091	4.0 - 5.0	7.5	15.0	4.0 - 8.0
QL 3094	2.7 - 3.2	6.5	10.0	4.0 - 6.0
QL 3097	4.0 - 5.0	7.5	18.0	3.5 - 6.0
QL 3100	3.5 - 4.0	6.5	12.0	4.0 - 7.5
QL 3106	3.5 - 4.0	6.5	12.0	3.0 - 5.0
QL 3110	3.5 - 4.0	6.5	12.0	3.5 - 4.0
QL 3113	3.5 - 4.0	7.0	12.0	4.0 - 7.5
QL 3138	2.7 - 3.2	6.0	8.0	3.0 - 4.5
QL 9985	2.7 - 3.0	6.0	10.0	3.0 - 6.5
QL 70014	4.0	7.0	8.0	4.1 - 7.0


Timber windows

Code	Dimensions (mm)			
	Groove		Rebate	Seal gap
	Throat width	Min. depth		
Centre seal				
QL 3053	4.0 - 5.0	7.5	12.0	4.5 - 6.0
QL 3063	4.0 - 5.0	7.5	12.0	5.5 - 7.5
QL 3067	4.0 - 5.0	7.5	12.0	4.0 - 6.0
QL 3068	3.4 - 4.2	6.5	11.0	4.5 - 6.5
QL 3072	2.7 - 3.2	6.5	10.0	2.7 - 4.3
QL 3076	3.0 - 3.5	6.0	10.0	3.0 - 6.0
QL 3079	3.2 - 4.0	6.5	10.0	2.7 - 4.3
QL 3101	2.7 - 3.2	7.0	13.0	3.5 - 6.0
QL 3111	3.5 - 4.0	7.0	12.0	3.5 - 4.0
QL 3140	4.0 - 5.0	7.5	15.0	4.0 - 6.5
QL 3141	2.7 - 3.2	5.5	12.0	4.0 - 6.5
QL 3147	3.0 - 3.5	6.0	10.0	3.0 - 6.0
Overlap seal				
QL 3034	2.7 - 3.0	8.0	8.5	0.0 - 1.5
QL 3054	2.8 - 3.2	5.5	10.0	4.0 - 6.0
QL 3070	2.7 - 3.0	8.0	8.0	0.0 - 1.5
QL 3097	4.0 - 5.0	7.5	18.0	3.5 - 6.0
QL 3131	2.7 - 3.0	8.0	8.0	0.0 - 1.5
QL 3141	2.7 - 3.2	5.5	12.0	4.0 - 6.5
Frame seal				
QL 3004	2.7 - 3.0	6.0	10.5	3.0 - 5.0
QL 3005	2.7 - 3.0	6.0	8.0	3.4 - 5.4
QL 3006	2.7 - 3.0	6.0	13.0	5.0 - 13.0
QL 3009	2.7 - 3.0	6.0	11.0	4.0 - 7.5
QL 3011	2.7 - 3.0	6.0	10.0	3.5 - 5.5
QL 3012	2.7 - 3.0	6.0	11.0	4.0 - 6.5
QL 3013	2.7 - 3.0	6.0	8.0	2.0 - 3.0
QL 3025	2.7 - 3.0	6.0	10.5	3.0 - 5.0
QL 3037	2.7 - 3.0	6.0	10.0	3.5 - 5.6
QL 3056	2.7 - 3.0	6.0	9.0	4.0 - 7.5
QL 3074	2.7 - 3.2	6.5	8.5	3.5 - 5.5
QL 3077	2.7 - 3.0	6.0	8.0	2.0 - 3.0
QL 3078	3.0 - 3.3	6.0	10.5	4.0 - 7.5
QL 3082	2.7 - 3.2	5.0	8.0	3.0 - 5.0
QL 3099	3.0 - 3.3	6.0	10.5	4.0 - 7.5
QL 3118	3.0 - 3.3	7.0	9.0	4.0 - 7.5
QL 3128	2.7 - 3.0	7.0	9.0	4.0 - 7.5
QL 3139	2.7 - 3.0	7.0	9.0	4.0 - 7.5
QL 3143	2.7 - 3.0	6.0	10.5	3.0 - 5.0
QL 5878	2.7 - 3.0	6.0	10.0	3.2 - 4.9
QL 9985	2.7 - 3.0	6.0	10.0	3.0 - 6.5

Aluminium windows and doors

Code	Dimensions (mm)		
	Location		Seal gap
	Throat width	Depth	
Type A (5.3 mm)			
QL 46105	3 - 3.2	2.3	5 - 5.5
QL 46800	2.6 - 3.2	2.3	3 - 3.5
QL 4636	3.2	2.3	1.0 - 2.5
QL 4870	3.2	2.3	2.5 - 4.0
QL 48100	3.2	2.3	5.5 - 7.0
QL 48400	3.2	2.3	0.5 - 2.0
QL 48510	3.2	2.3	1.1 - 2.4
QL 48650	3.2	2.3	1.8 - 3.4
QL 48700	3.2	2.3	2.5 - 6.0
QL 48800	3.2	2.3	2.5 - 7.0
QL 48750	3.2	2.3	2.7 - 4.6
QL 48950	3.2	2.3	4.0 - 6.5
QL 70013	3.2	5.3	4.5 - 8.5
Type B (6.3 mm)			
QL 57700	3.8	2.3	2.3 - 4.0
Type C (7.5 mm)			
QL 6970	4.6	2.3	2.5 - 4.0
QL 69100	4.6	2.3	5.5 - 7.0
QL 69400	4.6	2.3	0.5 - 1.5
QL 69510	4.6	2.3	1.1 - 2.4
QL 69650	4.6	2.3	1.8 - 3.4
QL 69700	4.6	2.3	2.5 - 6.0
QL 69750	4.6	2.3	2.7 - 4.6
QL 69800	4.6	2.3	2.5 - 7.0
QL 69950	4.6	2.3	4.0 - 6.5
QL 70012	4.6	7.5	4.5 - 8.5




Q-LON

Brush pile

Extruded

PVCu windows and doors

Code	Location	Dimensions (mm)	
		Throat width	Seal gap
QL 4465		4.2	3.0 - 4.8
QL 5570		3.3	3.0 - 4.8
QL 6571		3.0	3.0 - 5.0
QL 6991		3.9	2.0 - 3.2
QL 7307		3.2	2.8 - 4.4
QL 9005		2.4	2.5 - 4.1
QL 9100		2.4	2.7 - 4.4
QL 9112		3.2	3.0 - 4.9
QL 9154		3.2	2.8 - 4.5
QL 9257		3.2	4.5 - 7.1
QL 9489		3.4	2.5 - 4.0
QL 9536		3.9	4.0 - 8.0
QL 9596		3.4	2.5 - 4.0
QL 9646		3.6	3.5 - 5.5
QL 9688		2.8	3.0 - 7.0
QL 9898		3.2	3.0 - 5.5
QL 9926		3.2 - 3.4	3.0 - 7.5
QL 9928		3.2 - 3.4	3.0 - 7.5

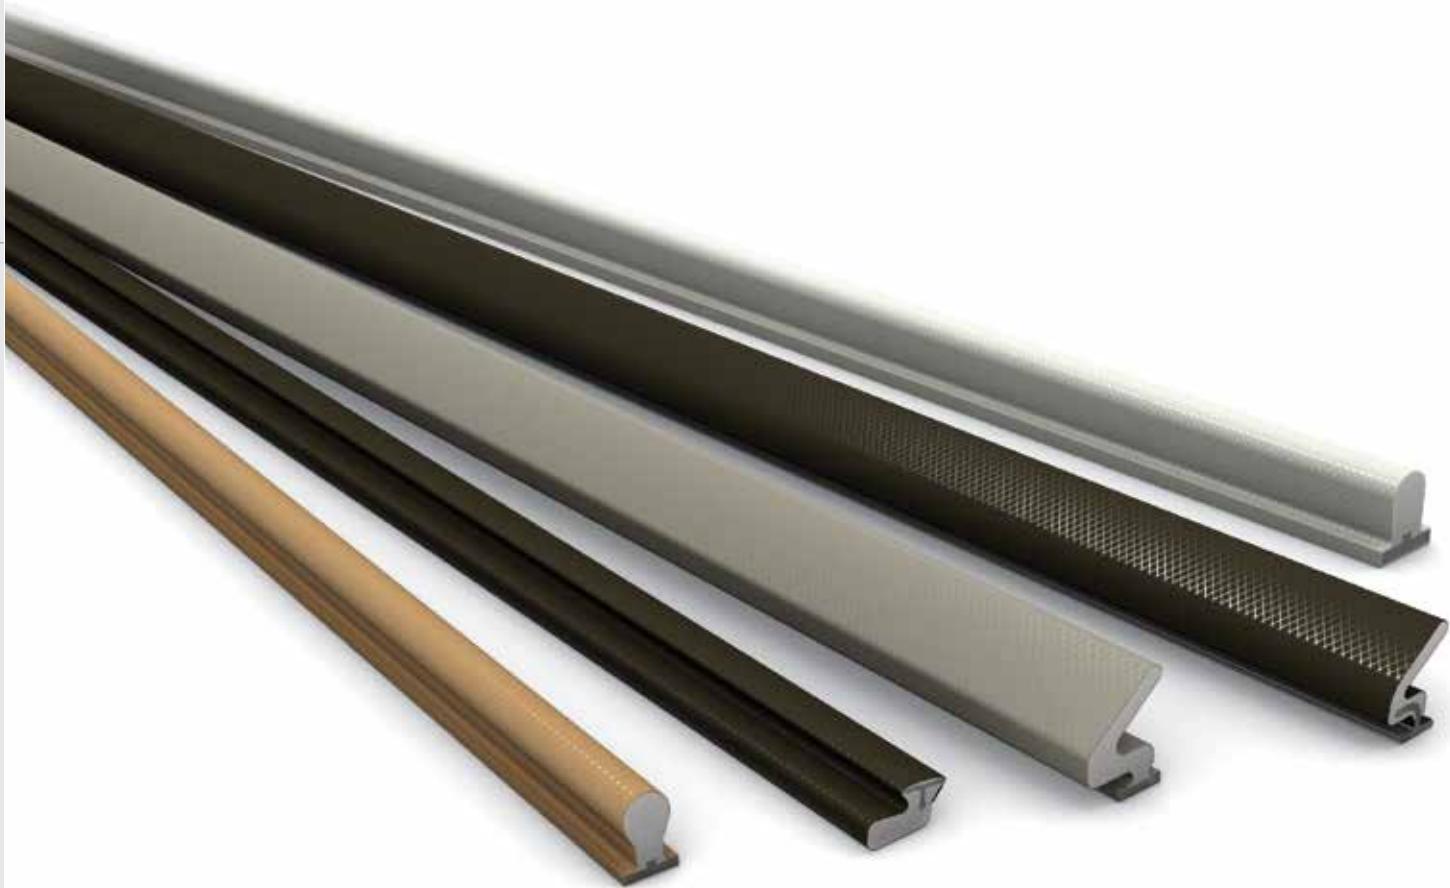



FIRE RETARDANT

Seals classified to EN 13501-1, Class E, designed to reduce the spread of fire when in contact with it, slowing the speed of flames and avoiding the dispersion of flammable material.

Schlegel

LOOKING AT THE FUTURE



Schlegel



Certifications Cradle to Cradle

The construction industry is just one of many sectors that are adapting to meet the need for **more sustainable production processes** and more efficient use of resources.

The current transition towards a circular economy is driving **Schlegel** towards the use of materials and products free from chemicals that harm

people and the environment, without however reducing our high quality standards.

Sustainability certifications also hold important value in the market, especially since some countries have imposed mandatory environmental certification for specific products.



In 2020 Schlegel joined the certification programme led by the Cradle to Cradle Products Innovation Institute. This innovative initiative promotes sustainability by driving the transformation towards the design and production of products with a positive impact.

The Cradle to Cradle Certified® Products Programme is a multi-attribute, continuous improvement methodology that evaluates products across five categories of human and environmental health.

It evaluates products across five categories of human and environmental health. Each product is assigned a level for each category.

The standard encourages continuous improvement over time by awarding certification based on ascending levels of achievement.

Cradle to Cradle Certified® is recognised as a preferred product certification by many leading brands, organisations and sustainability standards. For Schlegel this is only the first step towards more ambitious goals.



Find out more about
the **Cradle to Cradle®**
certification system

Material health

Products are designed and developed through a process of inventorying, assessing and optimising chemical materials.

Circular economy

No more waste: products remain in a perpetual cycle of use and reuse.

Renewable energy & Carbon management

Products are manufactured using renewable energy.

Water stewardship

Since water is a valuable resource, watersheds are protected, leaving clean water available to people and all other organisms.

Social fairness

Business operations have to take into account all people and natural systems affected by a product manufacturing cycle.



Other certifications

EN 12365

Performance requirement and classification of gaskets for fenestration. Aiding in seal selection

Compression Set Testing

Based on EN 12365-4 Recovery after ageing at maximum working temperature.
For improved sealing life

UV Resistance

Accelerated weather test acc. to DIN EN ISO 4892-2 - Surface liner. Tests at: 2 GJ/m², 4 GJ/m² (6 GJ/m², 8 GJ/m²) for improved longevity

Thermal Conductivity

Tested to EN 12667:2001 ;D = 0.041 W/(m · K).
Low thermal transmittance supports improved window classification.

Komo

KOMO is the premier quality mark for the building and infrastructure sector in the Netherlands

Fire Retardant Version

Tested according EN 13501-1 Class E.
For Fire Rated doors.

Extreme Weather Resistance (Russian Standard)

TU5775-001-4900-1519-07.
Testing various properties and performance of seals at extreme climatic conditions - eg-60C





Code	Certification				
	EN 12365	KOMO	SKZ	Sintef	Cradle to Cradle
QL 1026	x	x			x
QL 1032	x	x			x
QL 3004	x	x			x
QL 3005	x	x		x	x
QL 3006	x	x			x
QL 3009	x	x			x
QL 3011	x	x			x
QL 3012	x	x			x
QL 3013	x	x		x	x
QL 3020	x	x			
QL 3025	x	x			x
QL 3034	x	x			x
QL 3037	x	x			x
QL 3042	x	x			x
QL 3053	x	x		x	x
QL 3054	x	x			x
QL 3056	x	x		x	x
QL 3059	x	x			x
QL 3061	x	x			x
QL 3063	x	x			x
QL 3067	x	x			x
QL 3068	x	x			x
QL 3070	x	x			x
QL 3072	x	x	x	x	x
QL 3073	x	x			x
QL 3074	x	x			x
QL 3076	x	x	x	x	x
QL 3077	x				x
QL 3078	x	x	x	x	x
QL 3079	x	x			x
QL 3082	x	x	x	x	x
QL 3091	x	x	x	x	x
QL 3093	x	x			x
QL 3094	x	x	x	x	x
QL 3095	x	x			x
QL 3096	x	x	x	x	x
QL 3097	x	x			x
QL 3098	x	x			x
QL 3099	x	x			x
QL 3101	x	x			x
QL 3102	x	x			x

Code	Certification				
	EN 12365	KOMO	SKZ	Sintef	Cradle to Cradle
QL 3104	x	x		x	x
QL 3106	x	x			x
QL 3109	x	x			x
QL 3110	x				x
QL 3111	x	x			x
QL 3113		x			x
QL 3116	x	x			x
QL 3117	x	x			x
QL 3118	x	x		x	x
QL 3121	x	x			x
QL 3122	x	x			x
QL 3124	x	x			x
QL 3126	x	x			x
QL 3128	x	x		x	x
QL 3131	x	x			x
QL 3138	x				x
QL 3139	x	x			x
QL 3140	x	x			x
QL 3141	x	x			x
QL 3143	x	x		x	x
QL 3147	x	x		x	x
QL 3150	x	x			
QL 3151	x	x			x
QL 3152	x				
QL 4465	x	x	x ¹		x
QL 45	x	x	x ¹		
QL 46105	x		x ¹		x
QL 46800	x		x ¹		x
QL 48400	x	x	x ¹		x
QL 48510	x	x	x ¹		x
QL 48650	x	x	x ¹		x
QL 4870	x	x	x ¹		x
QL 48700	x	x	x ¹		x
QL 48750	x	x	x ¹		x
QL 48800	x	x	x ¹		x
QL 48950	x	x	x ¹		x
QL 50	x	x			x
QL 55	x	x			x
QL 5570	x	x	x ¹	x	x
QL 5626	x	x			
QL 5694	x	x			x

Code	Certification				
	EN 12365	KOMO	SKZ	Sintef	Cradle to Cradle
QL 57700	x	x	x ¹		x
QL 5878	x	x	x ¹		x
QL 60	x	x			x
QL 6571	x	x	x ¹		x
QL 69400	x	x	x ¹		x
QL 69510	x	x	x ¹		x
QL 69650	x	x	x ¹		x
QL 69700	x	x	x ¹		x
QL 69750	x	x	x ¹		x
QL 69800	x	x	x ¹		x
QL 6991	x	x	x ¹		x
QL 69950	x	x	x ¹		x
QL 7000	x	x			x
QL 70012	x				
QL 70013	x				
QL 70014	x				
QL 7066	x	x	x ¹		x
QL 7307	x	x	x ¹		x
QL 836	x	x	x ¹		x
QL 9005	x	x	x ¹		x
QL 9100	x	x	x ¹		x
QL 9111	x	x			x
QL 9112	x	x	x ¹		x
QL 9154	x	x	x ¹		x
QL 9171	x				
QL 9257	x	x	x ¹		x
QL 9480					
QL 9489	x	x		x	x
QL 9536	x	x	x ¹		
QL 9596	x	x	x ¹		
QL 9646	x	x	x ¹	x	x
QL 9608	x	x	x ¹		
QL 9613	x	x	x ¹		
QL 9688	x	x	x ¹		x
QL 9898	x	x	x ¹		x
QL 9926	x	x	x ¹		x
QL 9928	x	x	x ¹		x
QL 9985	x	x			x

¹Q-LON seal material was SKZ tested on the suitability for plastic windows in the colours white, silver grey and black



Q-LOON

Brush pile

Extruded



Universal

Application on all surfaces

Fixing with pre-applied adhesive tape.


Alternatively it can be fixed with adhesive tape, hot melt glue or staples.

QL 1026	2Q000
Width: 12.0	
Height: 4.0	
Rebate: 12.0	
Seal gap: 1.0 - 3.0	
Pack size: 250 m x 2 500 m x 2	
Universal with adhesive	
W26276	
Cradle to Cradle Certified® Bronze	


QL 1032	2Q007
Width: 12.0	
Height: 7.0	
Rebate: 12.0	
Seal gap: 2.0 - 6.0	
Pack size: 250 m x 2 500 m x 2	
Universal with adhesive	
W35276	
Cradle to Cradle Certified® Bronze	




QL 3042	2Q098	
Width: 11.2		
Height: 6.5		
Rebate: 11.0		
Seal gap: 3.0 - 5.5		
Pack size: 400 m x 2		
Universal without adhesive		
W24276		
Cradle to Cradle Certified® Bronze		




QL 3059	2Q119	
Width: 10.8		
Height: 8.7		
Rebate: 11.0		
Seal gap: 3.0 - 5.5		
Pack size: 300 m x 2		
Universal without adhesive		
W33266		
Cradle to Cradle Certified® Bronze		




QL 3061	2Q140	
Width: 15.0		
Height: 12.0		
Rebate: 15.0		
Seal gap: 5.0 - 10.0		
Pack size: 250 m x 2		
Universal without adhesive		
W33266		
Cradle to Cradle Certified® Bronze		




QL 3116	2Q357	
Width: 10.8		
Height: 8.7		
Rebate: 11.0		
Seal gap: 3.0 - 5.5		
Pack size: 300 m x 2		
Universal with adhesive		
W34266		
Cradle to Cradle Certified® Bronze		




QL 3117	2Q364	
Width: 11.2		
Height: 6.5		
Rebate: 11.0		
Seal gap: 3.0 - 5.5		
Pack size: 400 m x 2		
Universal with adhesive		
W23266		
Cradle to Cradle Certified® Bronze		




QL 3121	2Q385	
Width: 15.0		
Height: 11.0		
Rebate: 15.0		
Seal gap: 5.0 - 10.0		
Pack size: 225 m x 2		
Universal with adhesive		
W32266		
Cradle to Cradle Certified® Bronze		




QL 3121 FR	2Q386	
Fire retardant		
Width: 15.0		
Height: 11.0		
Rebate: 15.0		
Seal gap: 5.0 - 10.0		
Pack size: 225 m x 2		
Universal with adhesive		
W32266		




QL 3122	2Q231	
Width: 7.0		
Height: 2.2		
Rebate: 7.0		
Seal gap: 0.5 - 2.0		
Pack size: 200 m x 2		
Universal with adhesive		
W17276		
Cradle to Cradle Certified® Bronze		




QL 3124	2Q406	
Width: 6.4		
Height: 3.7		
Rebate: 6.0		
Seal gap: 2.5 - 3.5		
Pack size: 1000 m x 2		
Universal with adhesive		
W16276		
Cradle to Cradle Certified® Bronze		



QL 3126	2Q413	
Width: 10.0		
Height: 3.0		
Rebate: 10.0		
Seal gap: 1.0 - 2.5		
Pack size: 700 m x 2		
Universal with adhesive		
W17276		
Cradle to Cradle Certified® Bronze		



QL 9171	2Q840	
Width: 8.0		
Height: 6.0		
Rebate: 8.0		
Seal gap: 2.5 - 5.0		
Pack size: 500 m x 2		
Universal with and without adhesive		
W25266		






q-LON











Brush pile

Extruded

Interior design

Applications on timber doors and windows

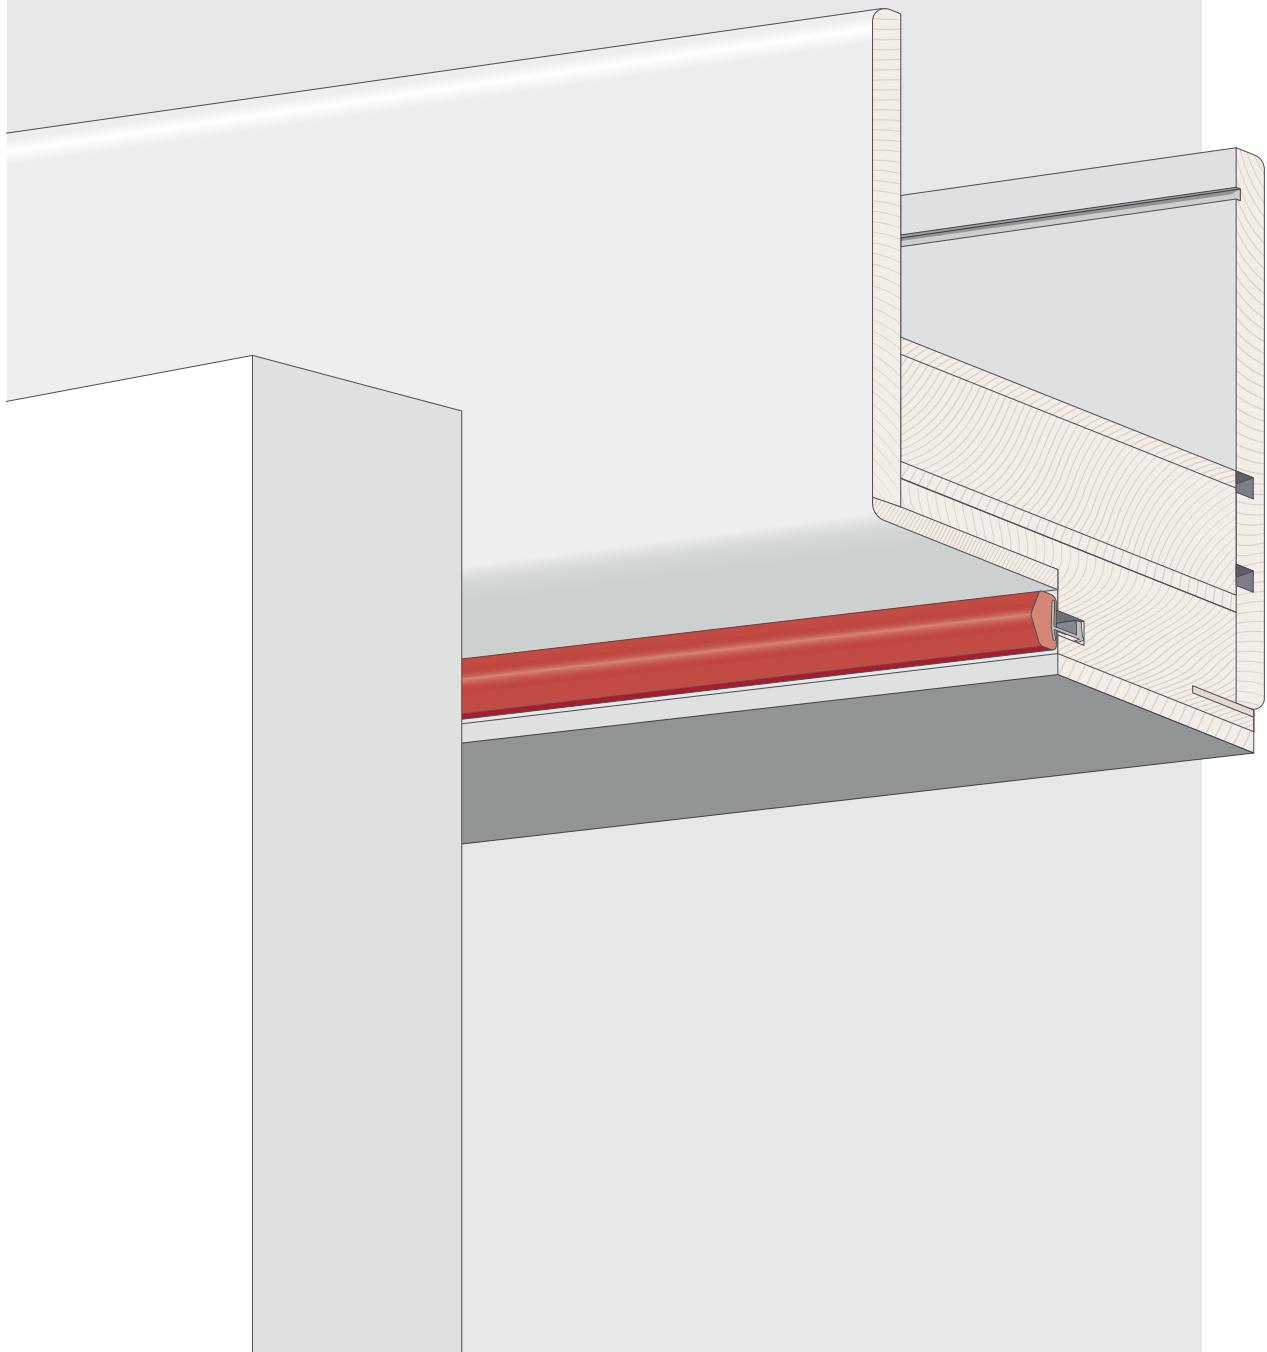


QL 45	2Q995		QL 836	2Q777	
Doors			Doors		
QL 50	2Q581		QL 3009	2Q035	
Doors			Doors		
Cradle to Cradle Certified® Bronze			W32266		
QL 55	2Q595		QL 3011	2Q042	
Doors			Doors		
W16266			W35276		
Cradle to Cradle Certified® Bronze			Cradle to Cradle Certified® Bronze		
QL 55 FR	2Q597		QL 3013	2Q210	
Fire retardant			Doors		
Doors			W15276		
W25266			Cradle to Cradle Certified® Bronze		
QL 60	2Q644		QL 3020	2Q070	
Doors			Doors		
W33266			W44266		
Cradle to Cradle Certified® Bronze					

F Suitable for Frame Seal **O** Suitable for Overlap Seal **S** Suitable for Sash Seal **C** Suitable for Centre Seal



QL 3034	2Q084		QL 3073	2Q189	
Doors			Doors		
W36276			W344275		
Cradle to Cradle Certified® Bronze			Cradle to Cradle Certified® Bronze		
QL 3037	2Q091		QL 3091	2Q231	
Doors			Doors		
W44266			W44265		
Cradle to Cradle Certified® Bronze			Cradle to Cradle Certified® Bronze		
QL 3056	2Q056		QL 3091 FR	2Q233	
Doors			Doors		
W34275			W44265		
Cradle to Cradle Certified® Bronze			Cradle to Cradle Certified® Bronze		
QL 3070	2Q175		QL 3093	2Q238	
Doors			Doors		
W25266			W44266		
Cradle to Cradle Certified® Bronze			Cradle to Cradle Certified® Bronze		
QL 3072	2Q182		QL 3094	2Q245	
Doors			Doors		
W24265			W32265		
Cradle to Cradle Certified® Bronze			Cradle to Cradle Certified® Bronze		

EXCELLENT MEMORY

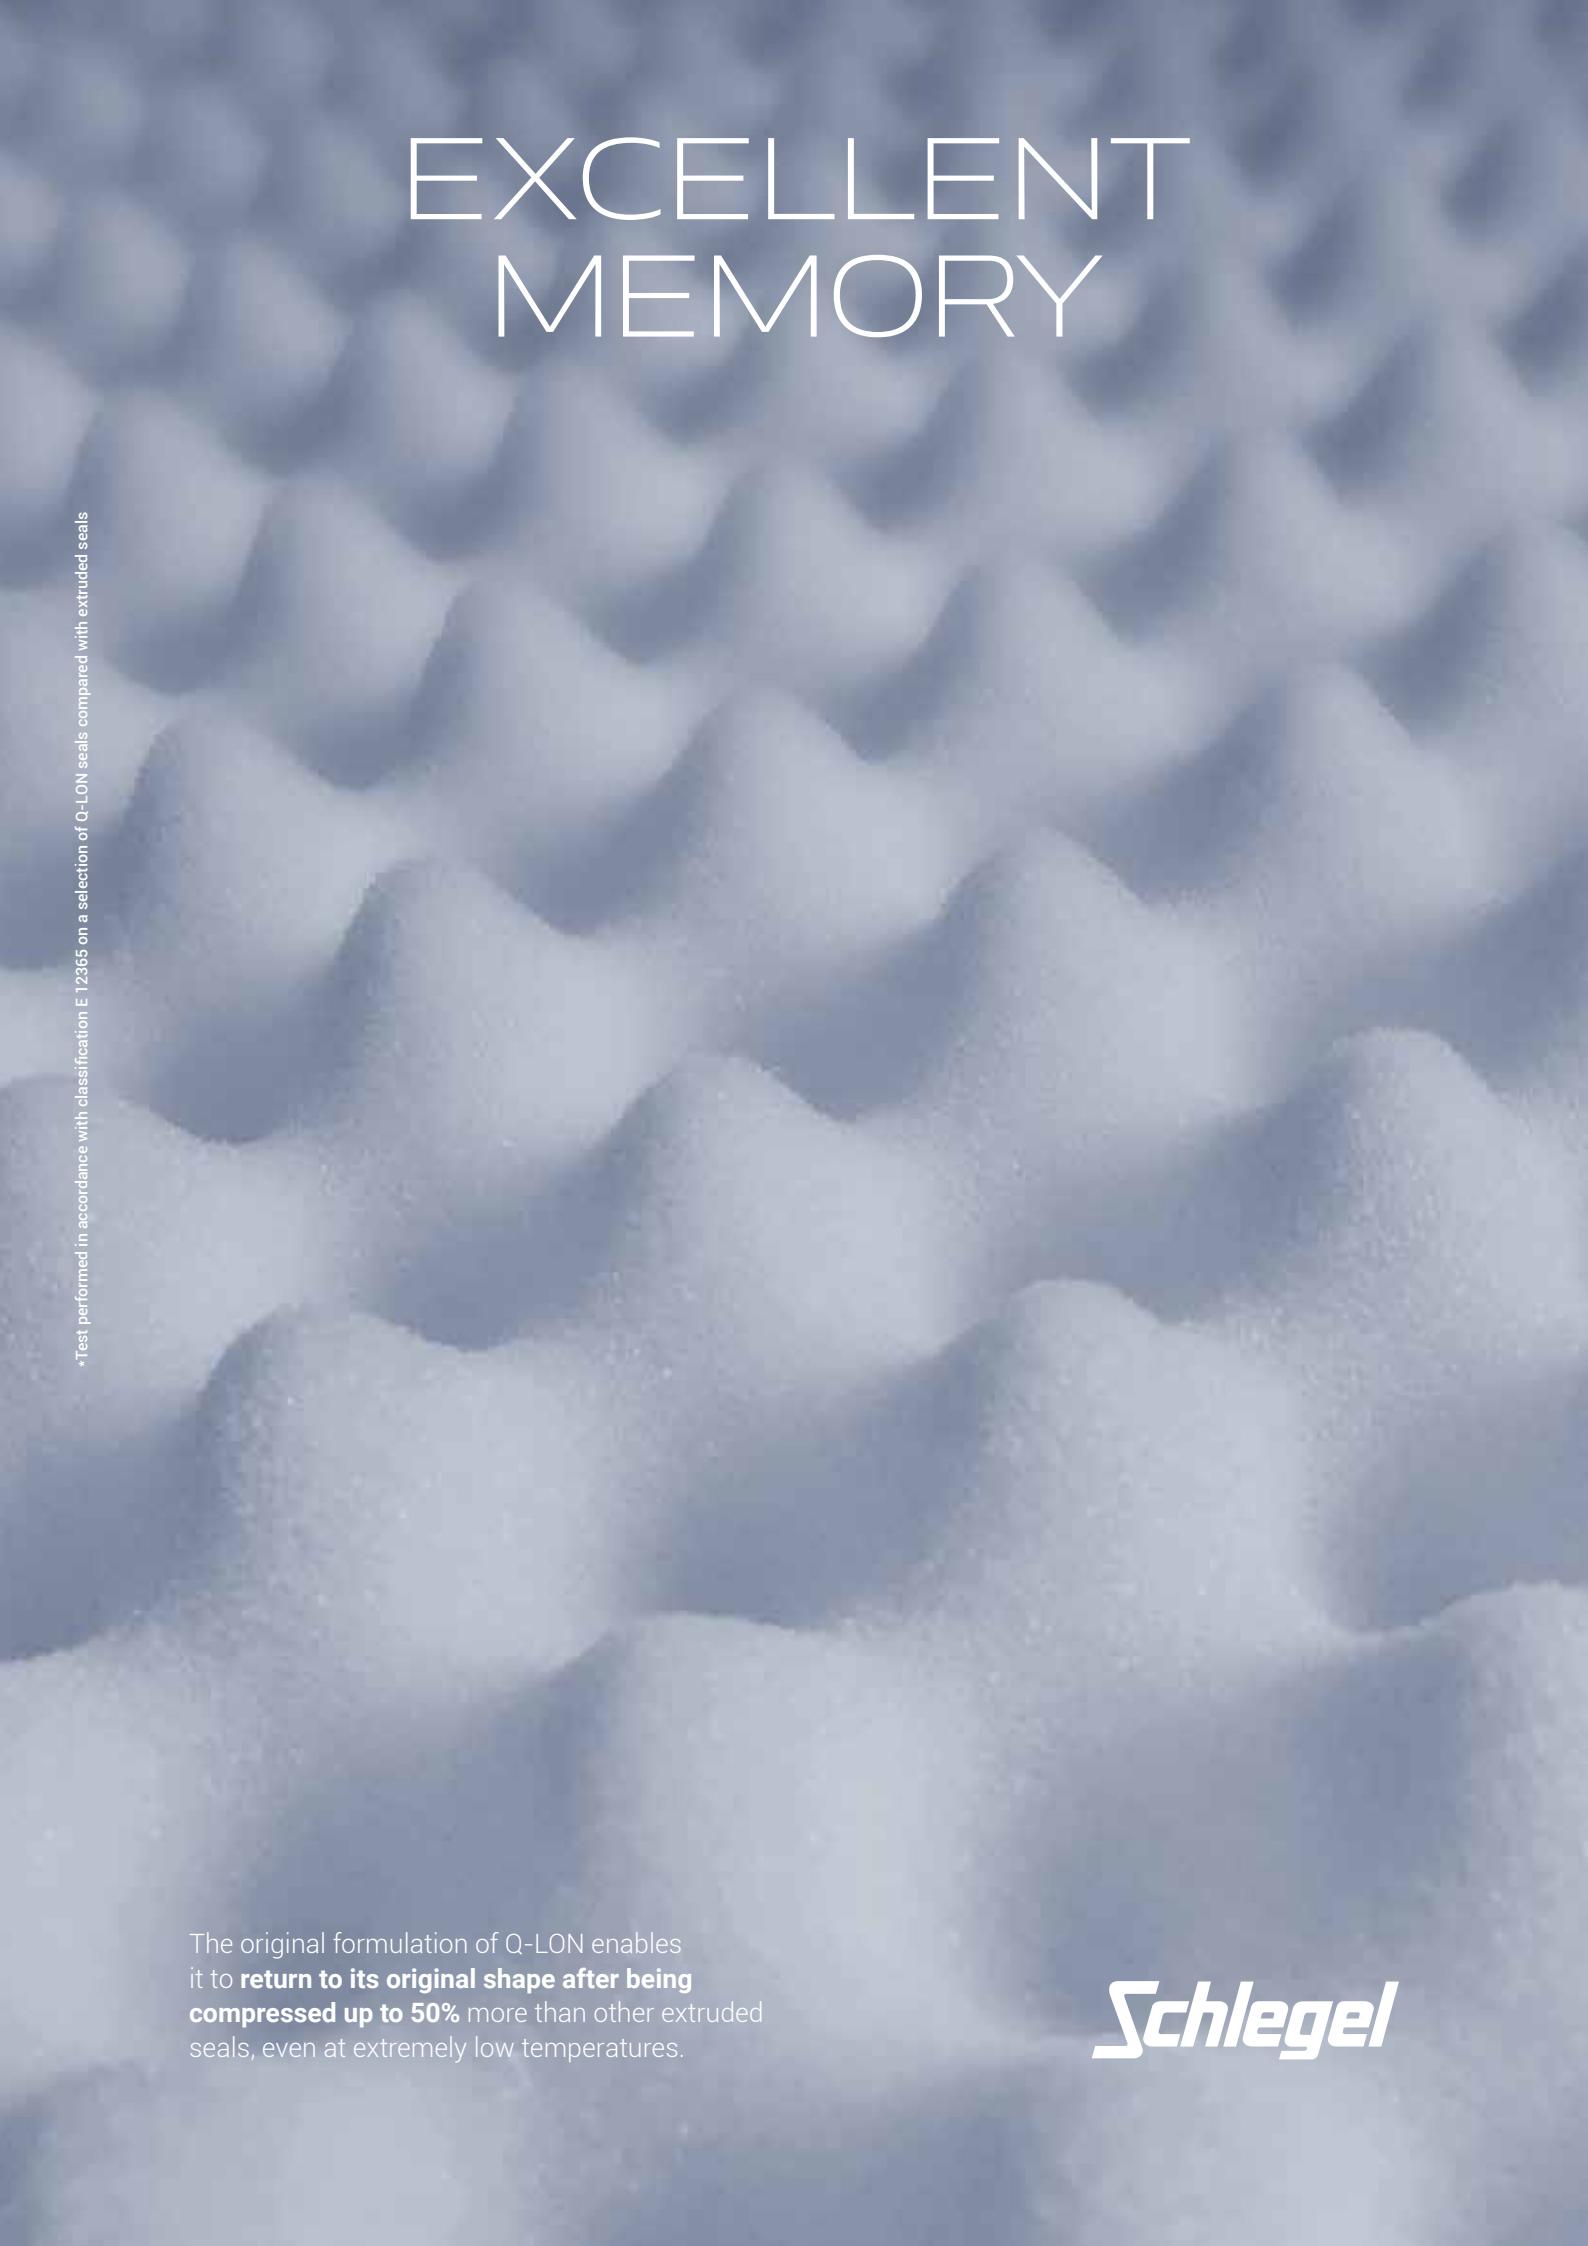

*Test performed in accordance with classification E 12365 on a selection of Q-LON seals compared with extruded seals


The original formulation of Q-LON enables it to **return to its original shape after being compressed up to 50%** more than other extruded seals, even at extremely low temperatures.

Schlegel



QL 3095	2Q252	
Groove width: 3.5 - 4.0		
Min. groove depth: 6.5		
Rebate: 10.0		
Seal gap: 4.0 - 6.0		
Pack size: 250 m x 2		
Doors		
W32275		
Cradle to Cradle Certified® Bronze		
QL 3096	2Q259	
Groove width: 4.0 - 5.0		
Min. groove depth: 7.5		
Rebate: 12.0		
Seal gap: 3.0 - 6.0		
Pack size: 200 m x 2		
Doors		
W35265		
Cradle to Cradle Certified® Bronze		
QL 3097	2Q266	
Groove width: 4.0 - 5.0		
Min. groove depth: 7.5		
Rebate: 18.0		
Seal gap: 3.5 - 6.0		
Pack size: 150 m x 2		
Doors	0	
W35266		
Cradle to Cradle Certified® Bronze		
QL 3098	2Q273	
Groove width: 3.0 - 4.0		
Min. groove depth: 7.5		
Rebate: 14.0		
Seal gap: 3.0 - 6.0		
Pack size: 150 m x 2		
Doors		
W33266		
Cradle to Cradle Certified® Bronze		
QL 3099 (QL 3078 RV)	2Q217	
Groove width: 3.0 - 3.3		
Min. groove depth: 6.0		
Seal gap: 4.0 - 7.5		
Pack size: 150 m x 2 / 300 m x 2		
Doors		
W33266		
Cradle to Cradle Certified® Bronze		

QL 3102	2Q294	
Groove width: 3.7 - 4.2		
Min. groove depth: 7.0		
Rebate: 11.0		
Seal gap: 5.0 - 7.5		
Pack size: 200 m x 2		
Doors		
W33266		
Cradle to Cradle Certified® Bronze		
QL 3104	2Q308	
Groove width: 4.0 - 5.0		
Min. groove depth: 7.5		
Rebate: 12.0		
Seal gap: 5.0 - 9.0		
Pack size: 200 m x 2		
Doors		
W44275		
Cradle to Cradle Certified® Bronze		
QL 3106	2Q152	
Groove width: 3.5 - 4.0		
Min. groove depth: 6.5		
Rebate: 12.0		
Seal gap: 3.0 - 5.0		
Pack size: 250 m x 2		
Doors		
W25276		
Cradle to Cradle Certified® Bronze		
QL 3109	2Q322	
Groove width: 4.0 - 5.0		
Min. groove depth: 7.0		
Rebate: 18.0		
Seal gap: 5.0 - 9.0		
Pack size: 100 m x 2		
Doors		
W43276		
Cradle to Cradle Certified® Bronze		
QL 3110	2Q329	
Groove width: 3.5 - 4.0		
Min. groove depth: 6.5		
Rebate: 12.0		
Seal gap: 3.5 - 4.0		
Pack size: 150 m x 2		
Doors		
W25266		
Cradle to Cradle Certified® Bronze		

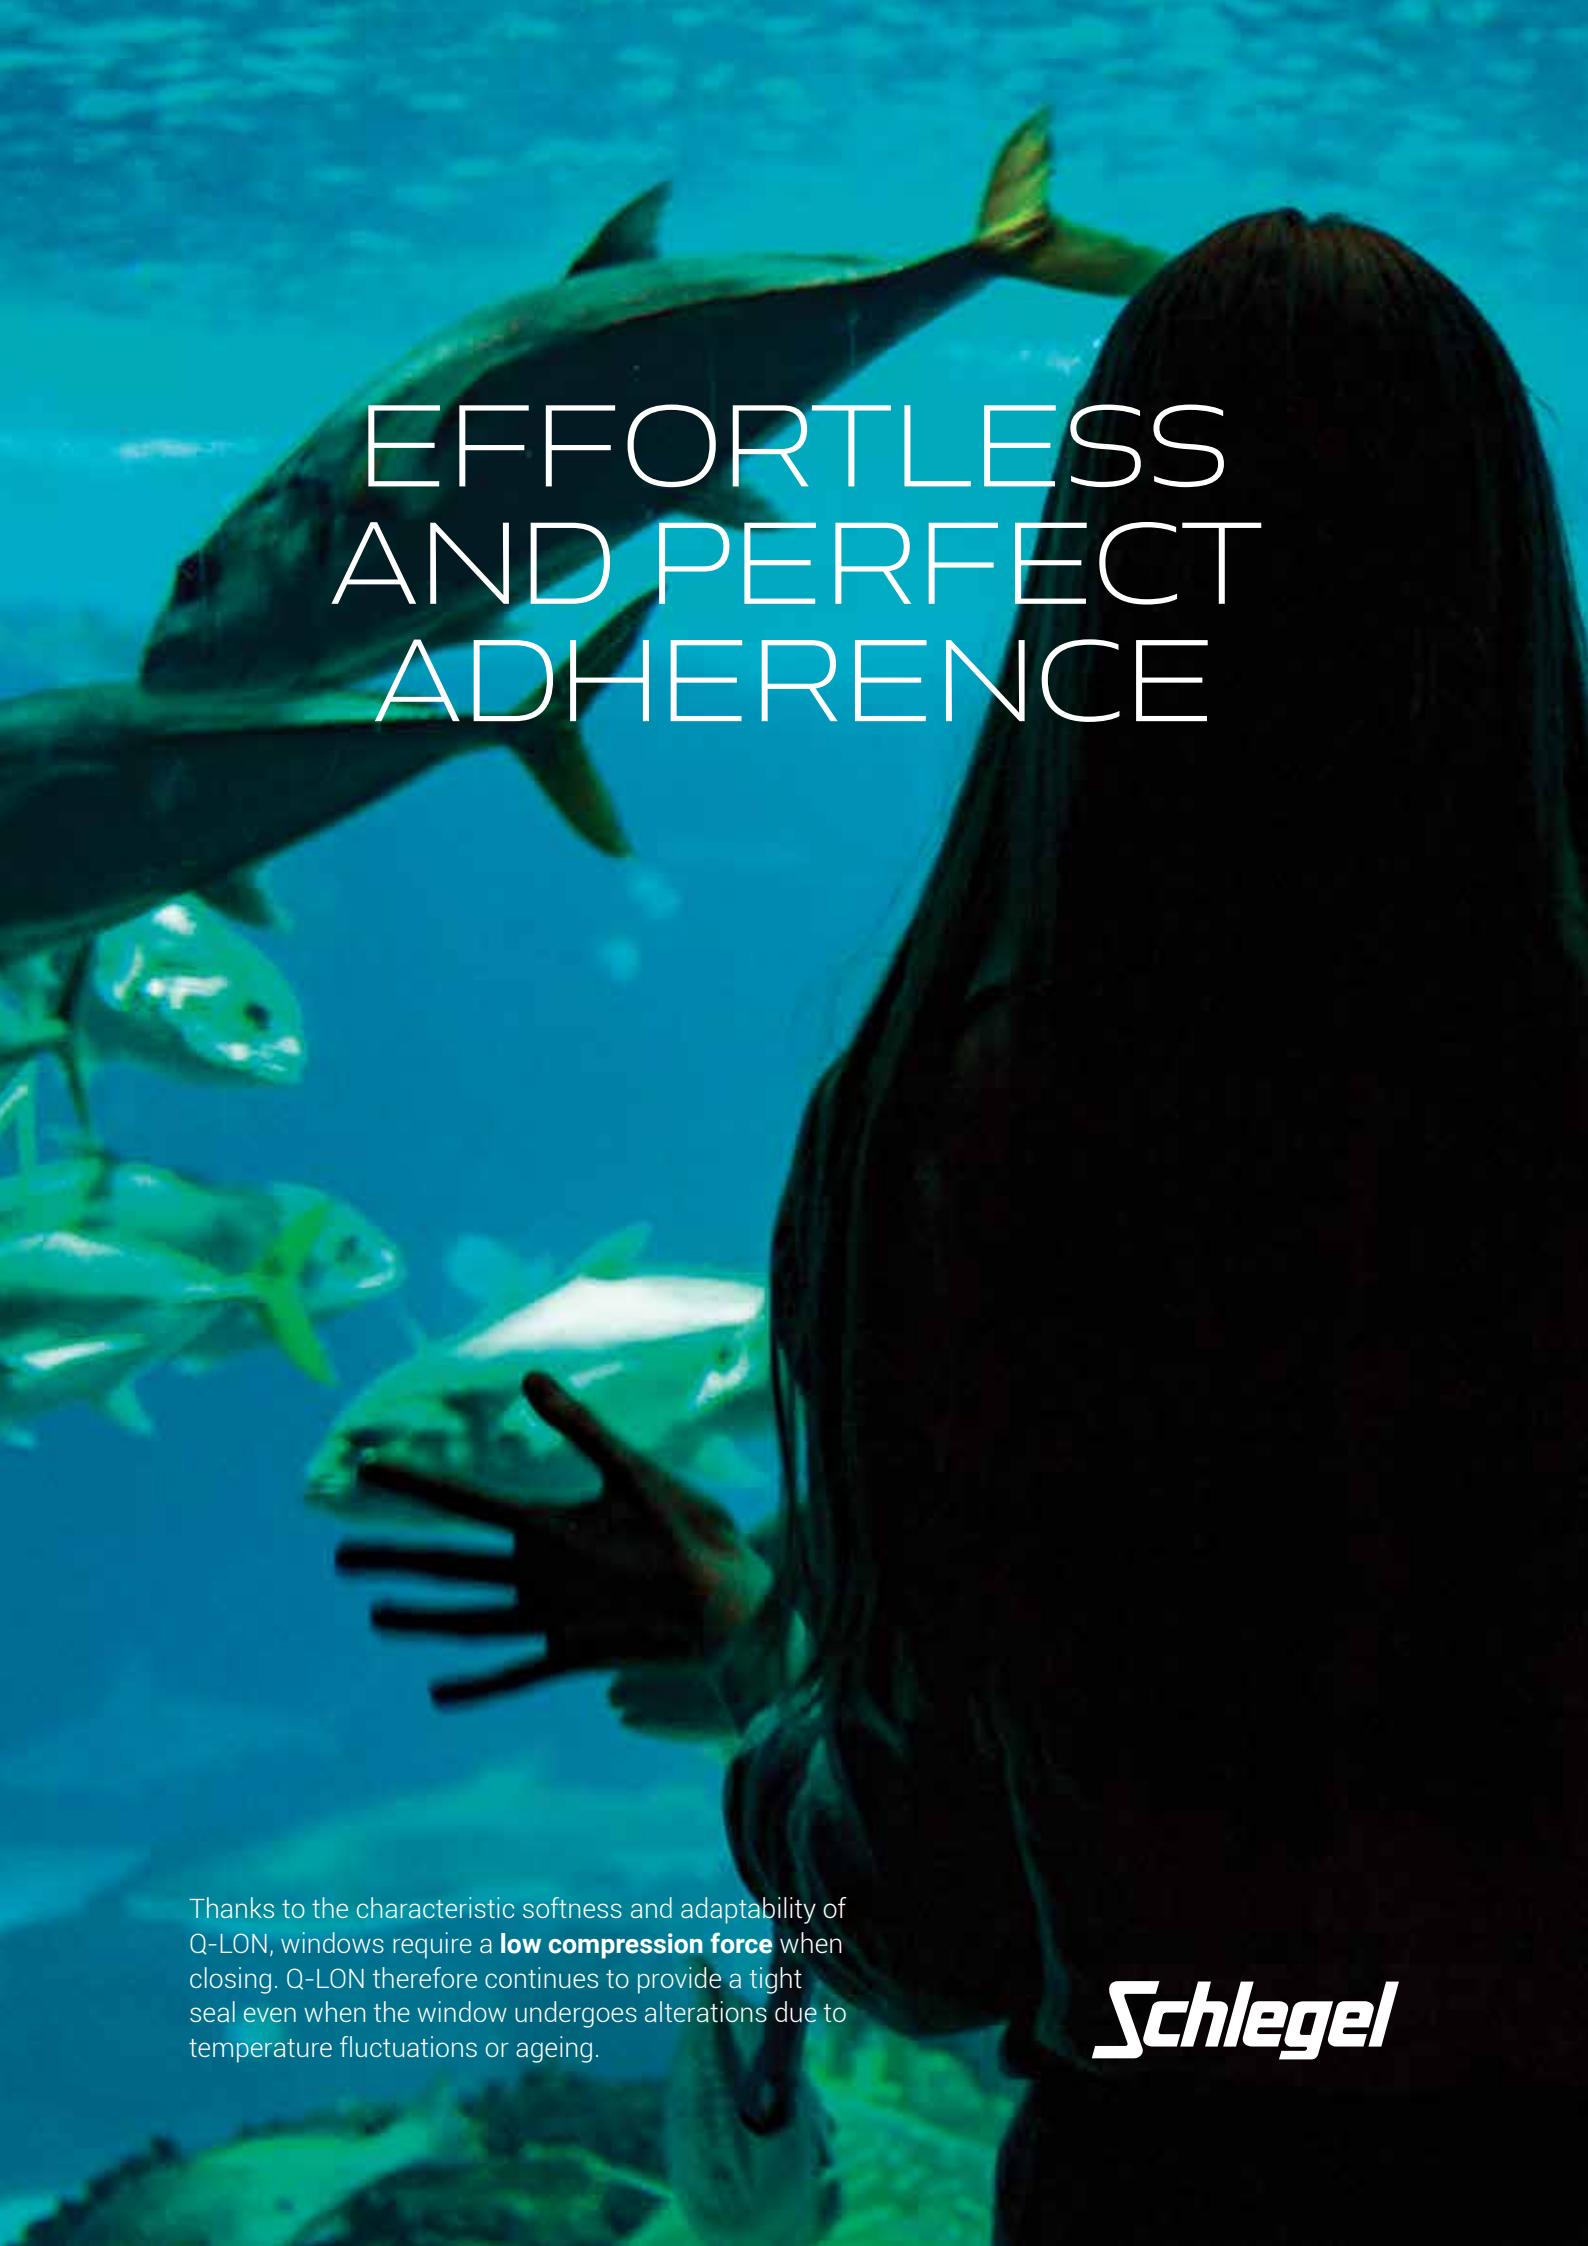


EFFORTLESS AND PERFECT ADHERENCE

Thanks to the characteristic softness and adaptability of Q-LON, windows require a **low compression force** when closing. Q-LON therefore continues to provide a tight seal even when the window undergoes alterations due to temperature fluctuations or ageing.


Schlegel




QL 3113	2Q343
Groove width: 3.5 - 4.0	
Min. groove depth: 7.0	
Rebate: 12.0	
Seal gap: 4.0 - 7.5	
Pack size: 200 m x 2	
Doors	
W35266	
Cradle to Cradle Certified® Bronze	




QL 3113 FR	2Q345
Fire retardant	
Groove width: 3.5 - 4.0	
Min. groove depth: 7.0	
Rebate: 12.0	
Seal gap: 4.0 - 7.5	
Pack size: 200 m x 2	
Doors	
W35266	




QL 3128	2Q420
Groove width: 2.7 - 3.0	
Min. groove depth: 7.0	
Seal gap: 4.0 - 7.5	
Pack size: 300 m x 2	
Doors	
W32265	
Cradle to Cradle Certified® Bronze	




QL 3131 (QL 3070 RV)	2Q427
Groove width: 2.7 - 3.0	
Min. groove depth: 8.0	
Seal gap: 0.0 - 1.5	
Pack size: 400 m x 2	
Doors	
W25266	
Cradle to Cradle Certified® Bronze	




QL 3138	2Q462
Groove width: 2.7 - 3.2	
Min. groove depth: 6.0	
Rebate: 10.0	
Seal gap: 3.0 - 4.5	
Pack size: 250 m x 2	
Doors	
W25276	
Cradle to Cradle Certified® Bronze	




QL 3139 (QL 3118 RV)	2Q469
Groove width: 3.0 - 3.3	
Min. groove depth: 7.0	
Rebate: 10.0	
Seal gap: 4.0 - 7.5	
Pack size: 700 m x 1	
Doors	
W31276	
Cradle to Cradle Certified® Bronze	




QL 3150	2Q500
Groove width: 3.0	
Min. groove depth: 6.5	
Rebate: 12.0	
Seal gap: 3.5 - 6.0	
Pack size: 250 m x 2	
Windows	
W33266	




QL 3152	2Q502
Groove width: 3.0	
Min. groove depth: 6.5	
Rebate: 14/15	
Seal gap: 3.5 - 6.0	
Pack size: 150 m x 2	
Doors	
W33266	



QL 5626	2Q609
Groove width: 2.7 - 3.0	
Min. groove depth: 6.0	
Rebate: 4.7 - 7.5	
Seal gap: 4.7 - 7.5	
Pack size: 300 m x 2	
Doors	
W33266	




QL 5694	2Q616
Groove width: 2.7 - 3.0	
Min. groove depth: 6.0	
Rebate: 6.0 - 11.0	
Seal gap: 6.0 - 11.0	
Pack size: 200 m x 2	
Doors	
W43266	
Cradle to Cradle Certified® Bronze	







QL 5878	2Q630	
Groove width: 2.7 - 3.0		
Min. groove depth: 6.0		
Rebate: 10.0		
Seal gap: 3.2 - 4.9		
Pack size: 250 m x 2		
Windows	F	
W25246		
Cradle to Cradle Certified® Bronze		




QL 7000	2Q749	
Groove width: 2.7 - 3.0		
Min. groove depth: 6.0		
Rebate: 13.0		
Seal gap: 4.0 - 10.8		
Pack size: 175 m x 2		
Doors		
W52266		
Cradle to Cradle Certified® Bronze		




QL 7066	2Q763	
Groove width: 2.7 - 3.0		
Min. groove depth: 6.0		
Rebate: 10.0		
Seal gap: 4.8 - 7.7		
Pack size: 400 m x 2		
Doors		
W33266		
Cradle to Cradle Certified® Bronze		




QL 9111	2Q8122	
Groove width: 3.0 - 3.3		
Min. groove depth: 6.0		
Seal gap: 4.8 - 7.9		
Pack size: 300 m x 2		
Doors		
W34266		
Cradle to Cradle Certified® Bronze		




QL 9480	2Q812	
Groove width: 2.7 - 3.0		
Min. groove depth: 6.0		
Seal gap: 3.5 - 7.0		
Pack size: 400 m x 1		
Doors		




QL 9608	2Q288	
Groove width: 3.0		
Min. groove depth: 6.5		
Rebate: 20.0		
Seal gap: 4.0 - 7.0		
Pack size: 150 m x 2		
Doors		
W33276		




QL 9613	2Q885	
Groove width: 3.0		
Min. groove depth: 6.5		
Rebate: 18.0		
Seal gap: 4.0 - 7.0		
Pack size: 150 m x 2		
Doors		
W33276		



QL 9985	2Q959	
Groove width: 2.7 - 3.0		
Min. groove depth: 6.0		
Rebate: 10.0		
Seal gap: 3.0 - 6.5		
Pack size: 250 m x 2		
Doors		
W35276		
Cradle to Cradle Certified® Bronze		



QL 70014	2Q752	
Groove width: 4.0		
Min. groove depth: 7.0		
Rebate: 8.0		
Seal gap: 4.1 - 7.0		
Pack size: 250 m x 2		
Windows		
W34276		






q-LON

Brush pile

Extruded

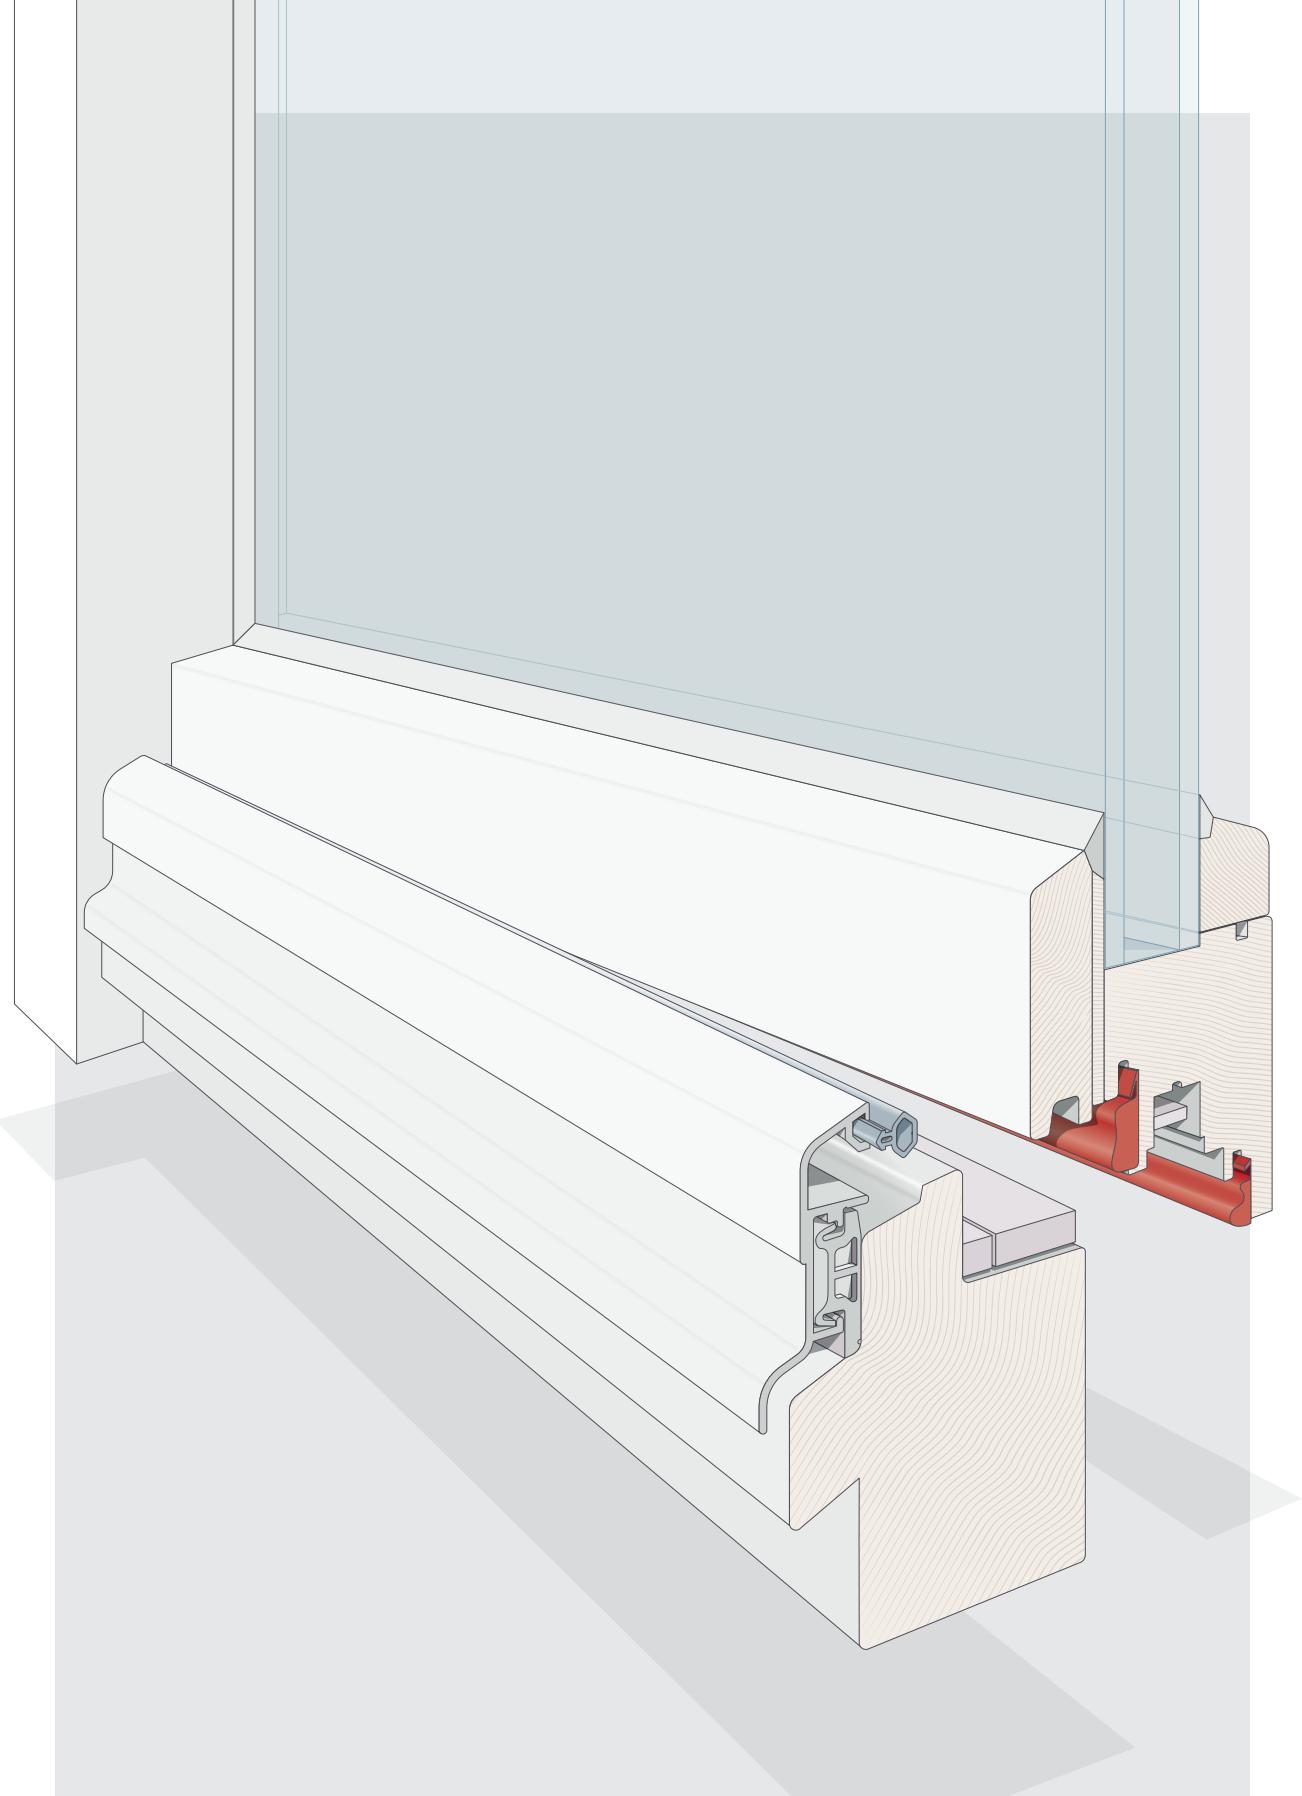

Timber

Timber window applications

QL 3004	2Q014	
Groove width: 2.7 - 3.0 Min. groove depth: 6.0 Rebate: 10.5 Seal gap: 3.0 - 5.0 Pack size: 350 m x 2		
Windows	F	
W26276		
Cradle to Cradle Certified® Bronze		
QL 3005	2Q021	
Groove width: 2.7 - 3.0 Min. groove depth: 6.0 Rebate: 8.0 Seal gap: 3.4 - 5.4 Pack size: 300 m x 2		
Windows	F	
W35266		
Cradle to Cradle Certified® Bronze		
QL 3006	2Q028	
Groove width: 2.7 - 3.0 Min. groove depth: 6.0 Rebate: 13.0 Seal gap: 5.0 - 13.0 Pack size: 2.1 m x 150		
Windows	F	
W62276		
Cradle to Cradle Certified® Bronze		
QL 3011	2Q042	
Groove width: 2.7 - 3.0 Min. groove depth: 6.0 Rebate: 10.0 Seal gap: 3.5 - 5.5 Pack size: 250 m x 2		
Windows	F	
W35266		
Cradle to Cradle Certified® Bronze		
QL 3012	2Q049	
Groove width: 2.7 - 3.0 Min. groove depth: 6.0 Rebate: 11.0 Seal gap: 4.0 - 6.5 Pack size: 200 m x 2		
Windows	F	
W45276		
Cradle to Cradle Certified® Bronze		

QL 3013	2Q210	
Groove width: 2.7 - 3.0 Min. groove depth: 6.0 Rebate: 8.0 Seal gap: 2.0 - 3.0 Pack size: 500 m x 2		
Windows	F	S
W15276		
Cradle to Cradle Certified® Bronze		
QL 3025 (QL 3004 RV)	2Q014	
Groove width: 2.7 - 3.0 Min. groove depth: 6.0 Rebate: 10.5 Seal gap: 3.0 - 5.0 Pack size: 350 m x 2		
Windows	F	
W25266		
Cradle to Cradle Certified® Bronze		
QL 3034	2Q084	
Groove width: 2.7 - 3.0 Min. groove depth: 8.0 Rebate: 8.5 Seal gap: 0.0 - 1.5 Pack size: 400 m x 2		
Windows	O	S
W36276		
Cradle to Cradle Certified® Bronze		
QL 3037	2Q091	
Groove width: 2.7 - 3.0 Min. groove depth: 6.0 Rebate: 10.0 Seal gap: 3.5 - 5.6 Pack size: 200 m x 2		
Windows	F	
W35266		
Cradle to Cradle Certified® Bronze		
QL 3053	2Q105	
Groove width: 4.0 - 5.0 Min. groove depth: 7.5 Rebate: 12.0 Seal gap: 4.5 - 6.0 Pack size: 200 m x 2		
Windows	C	S
W35266		
Cradle to Cradle Certified® Bronze		


F Suitable for Frame Seal **O** Suitable for Sash Seal **S** Suitable for Centre Seal **C** Suitable for Overlap Seal




QL 3054	2Q112	
Groove width: 2.8 - 3.2		
Min. groove depth: 5.5		
Rebate: 10.0		
Seal gap: 4.0 - 6.0		
Pack size: 250 m x 2		
Windows	0	
W35276		
Cradle to Cradle Certified® Bronze		
QL 3063	2Q147	
Groove width: 4.0 - 5.0		
Min. groove depth: 7.5		
Rebate: 12.0		
Seal gap: 5.5 - 7.5		
Pack size: 200 m x 2		
Windows	C S	
W36266		
Cradle to Cradle Certified® Bronze		
QL 3063 FR	2Q149	
Fire retardant		
Groove width: 4.0 - 5.0		
Min. groove depth: 7.5		
Rebate: 12.0		
Seal gap: 5.5 - 7.5		
Pack size: 200 m x 2		
Windows	C S	
W36266		
QL 3067	2Q161	
Groove width: 4.0 - 5.0		
Min. groove depth: 7.5		
Rebate: 12.0		
Seal gap: 4.0 - 6.0		
Pack size: 200 m x 2		
Windows	C S	
W25266		
Cradle to Cradle Certified® Bronze		
QL 3068	2Q168	
Groove width: 3.4 - 4.2		
Min. groove depth: 6.5		
Rebate: 11.0		
Seal gap: 4.5 - 6.5		
Pack size: 200 m x 2		
Windows	C S	
W35275		
Cradle to Cradle Certified® Bronze		

QL 3072	2Q182	
Groove width: 2.7 - 3.2		
Min. groove depth: 6.5		
Rebate: 10.0		
Seal gap: 2.7 - 4.3		
Pack size: 300 m x 2		
Windows	C S	
W24265		
Cradle to Cradle Certified® Bronze		
QL 3074	2Q196	
Groove width: 2.7 - 3.2		
Min. groove depth: 6.5		
Rebate: 8.5		
Seal gap: 3.5 - 5.5		
Pack size: 300 m x 2		
Windows	F	
W22276		
Cradle to Cradle Certified® Bronze		
QL 3076	2Q203	
Groove width: 3.0 - 3.5		
Min. groove depth: 6.0		
Rebate: 10.0		
Seal gap: 3.0 - 6.0		
Pack size: 250 m x 2		
Windows	F	
W34266		
Cradle to Cradle Certified® Bronze		
QL 3077 (QL 3013 RV)	2Q210	
Groove width: 2.7 - 3.0		
Min. groove depth: 6.0		
Rebate: 8.0		
Seal gap: 2.0 - 3.0		
Pack size: 500 m x 2		
Windows	F S	
W36266		
Cradle to Cradle Certified® Bronze		
QL 3078	2Q217	
Groove width: 3.0 - 3.3		
Min. groove depth: 6.0		
Rebate: 10.5		
Seal gap: 4.0 - 7.5		
Pack size: 250 m x 2 300 m x 2		
Windows	F	
W34266		
Cradle to Cradle Certified® Bronze		


QL 3079	2Q224	
Groove width: 3.2 - 4.0		
Min. groove depth: 6.5		
Rebate: 10.0		
Seal gap: 2.7 - 4.3		
Pack size: 300 m x 2		
Windows	F	S
W24266		
Cradle to Cradle Certified® Bronze		




QL 3082	2Q308	
Groove width: 2.7 - 3.2		
Min. groove depth: 5.0		
Rebate: 8.0		
Seal gap: 3.0 - 5.0		
Pack size: 250 m x 2		
Windows	F	
W35275		
Cradle to Cradle Certified® Bronze		




QL 3101	2Q021	
Groove width: 2.7 - 3.2		
Min. groove depth: 7.0		
Rebate: 13.0		
Seal gap: 3.5 - 6.0		
Pack size: 200 m x 2		
Windows	C	
W35276		
Cradle to Cradle Certified® Bronze		




QL 3111	2Q336	
Groove width: 3.5 - 4.0		
Min. groove depth: 7.0		
Rebate: 12.0		
Seal gap: 3.5 - 4.0		
Pack size: 200 m x 2		
Windows	C	S
W35256		
Cradle to Cradle Certified® Bronze		




QL 3118	2Q371	
Groove width: 3.0 - 3.3		
Min. groove depth: 7.0		
Rebate: 9.0		
Seal gap: 4.0 - 7.5		
Pack size: 300 m x 2		
Windows	F	
W31276		
Cradle to Cradle Certified® Bronze		




QL 3128	2Q420	
Groove width: 2.7 - 3.0		
Min. groove depth: 7.0		
Rebate: 9.0		
Seal gap: 4.0 - 7.5		
Pack size: 300 m x 2		
Windows	F	
W32265		
Cradle to Cradle Certified® Bronze		




QL 3131 (QL 3070 RV)	2Q427	
Groove width: 2.7 - 3.0		
Min. groove depth: 8.0		
Rebate: 8.0		
Seal gap: 0.0 - 1.5		
Pack size: 400 m x 2		
Windows	O	
W25266		
Cradle to Cradle Certified® Bronze		




QL 3140	2Q476	
Groove width: 4.0 - 5.0		
Min. groove depth: 7.5		
Rebate: 15.0		
Seal gap: 4.0 - 6.5		
Pack size: 200 m x 2		
Windows	C	
W35266		
Cradle to Cradle Certified® Bronze		



QL 3141	2Q483	
Groove width: 2.7 - 3.2		
Min. groove depth: 5.5		
Rebate: 12.0		
Seal gap: 4.0 - 6.5		
Pack size: 300 m x 2		
Windows	C	O
W35255		
Cradle to Cradle Certified® Bronze		



QL 3143	2Q490	
Groove width: 2.7 - 3.0		
Min. groove depth: 6.0		
Rebate: 10.5		
Seal gap: 3.0 - 5.0		
Pack size: 350 m x 2		
Windows		
W26275		
Cradle to Cradle Certified® Bronze		




F Suitable for Frame Seal **O** Suitable for Sash Seal **S** Suitable for Centre Seal **C** Suitable for Overlay Seal




F Suitable for Frame Seal **S** Suitable for Sash Seal **O** Suitable for Overlap Seal **C** Suitable for Centre Seal

QL 3147 (QL 3076 RV)	2Q203
Groove width: 3.0 - 3.5	
Min. groove depth: 6.0	
Rebate: 10.0	
Seal gap: 3.0 - 6.0	
Pack size: 250 m x 2	
Windows	
W34266	
Cradle to Cradle Certified® Bronze	



*Test performed to UNI EN ISO 10140-2 on a selection of Q-LON seals compared with extruded seals.

EXCELLENT SOUND INSULATION

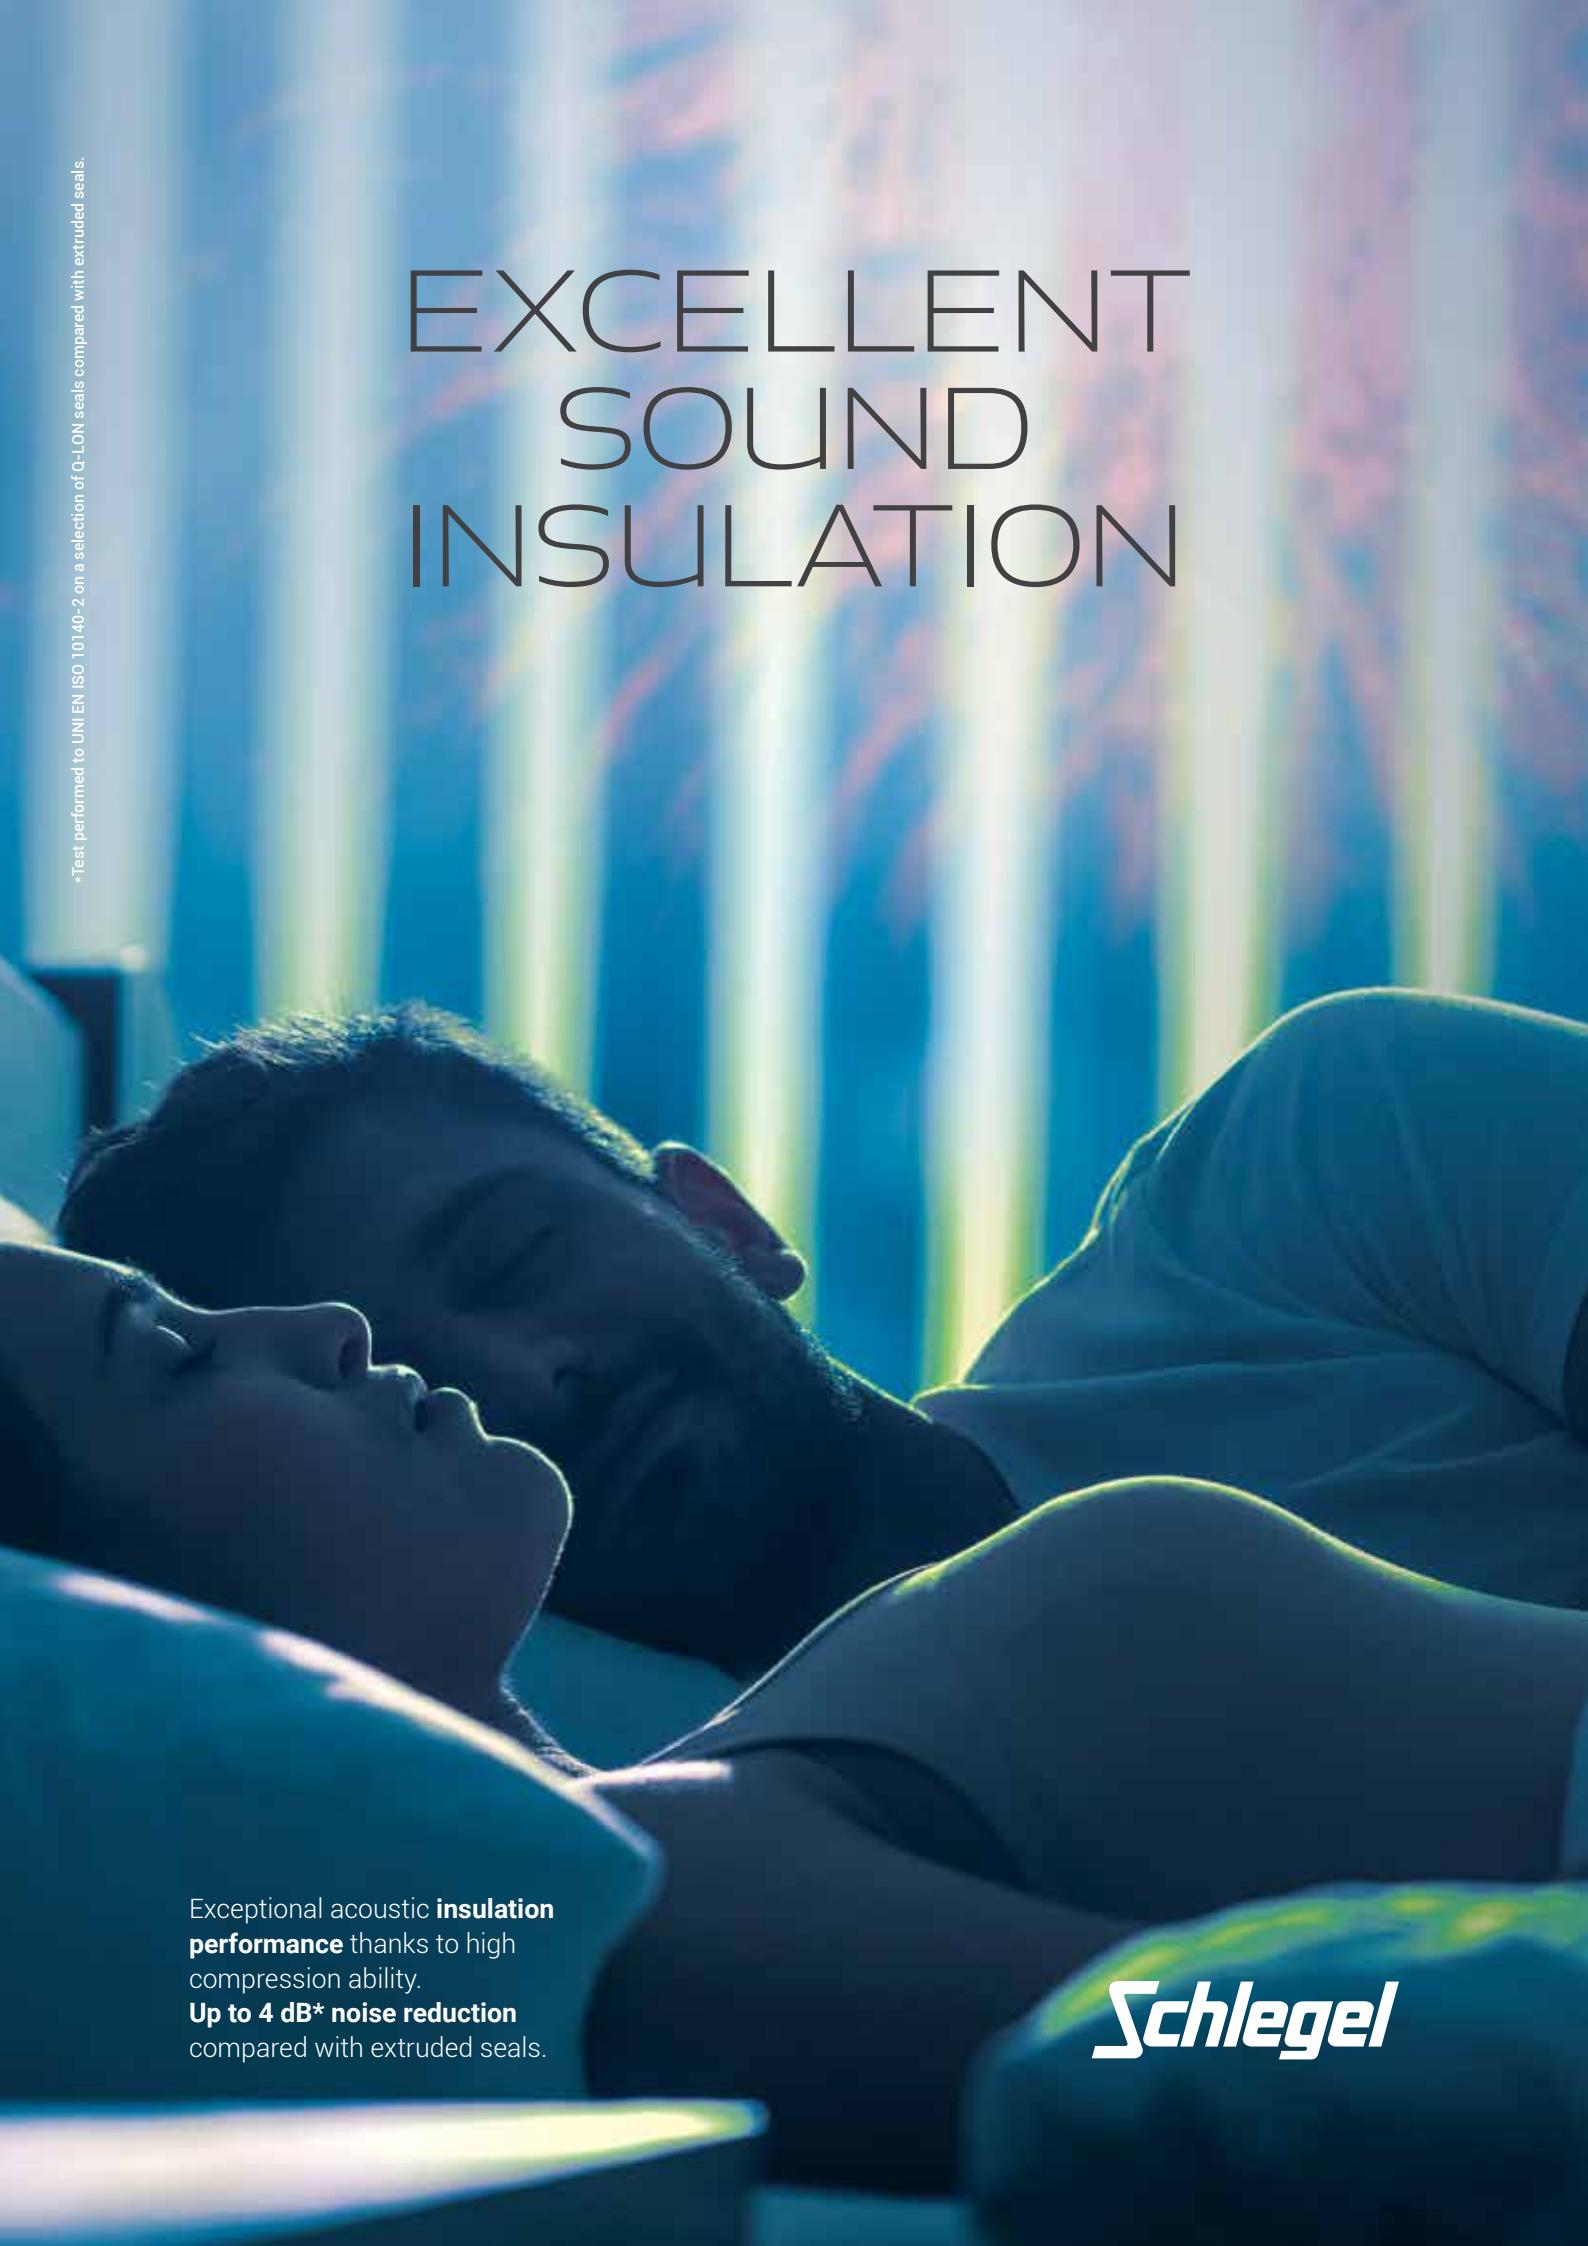

Exceptional acoustic **insulation performance** thanks to high compression ability.
Up to 4 dB* noise reduction compared with extruded seals.


Schlegel



Q-LON

Brush pile

Extruded

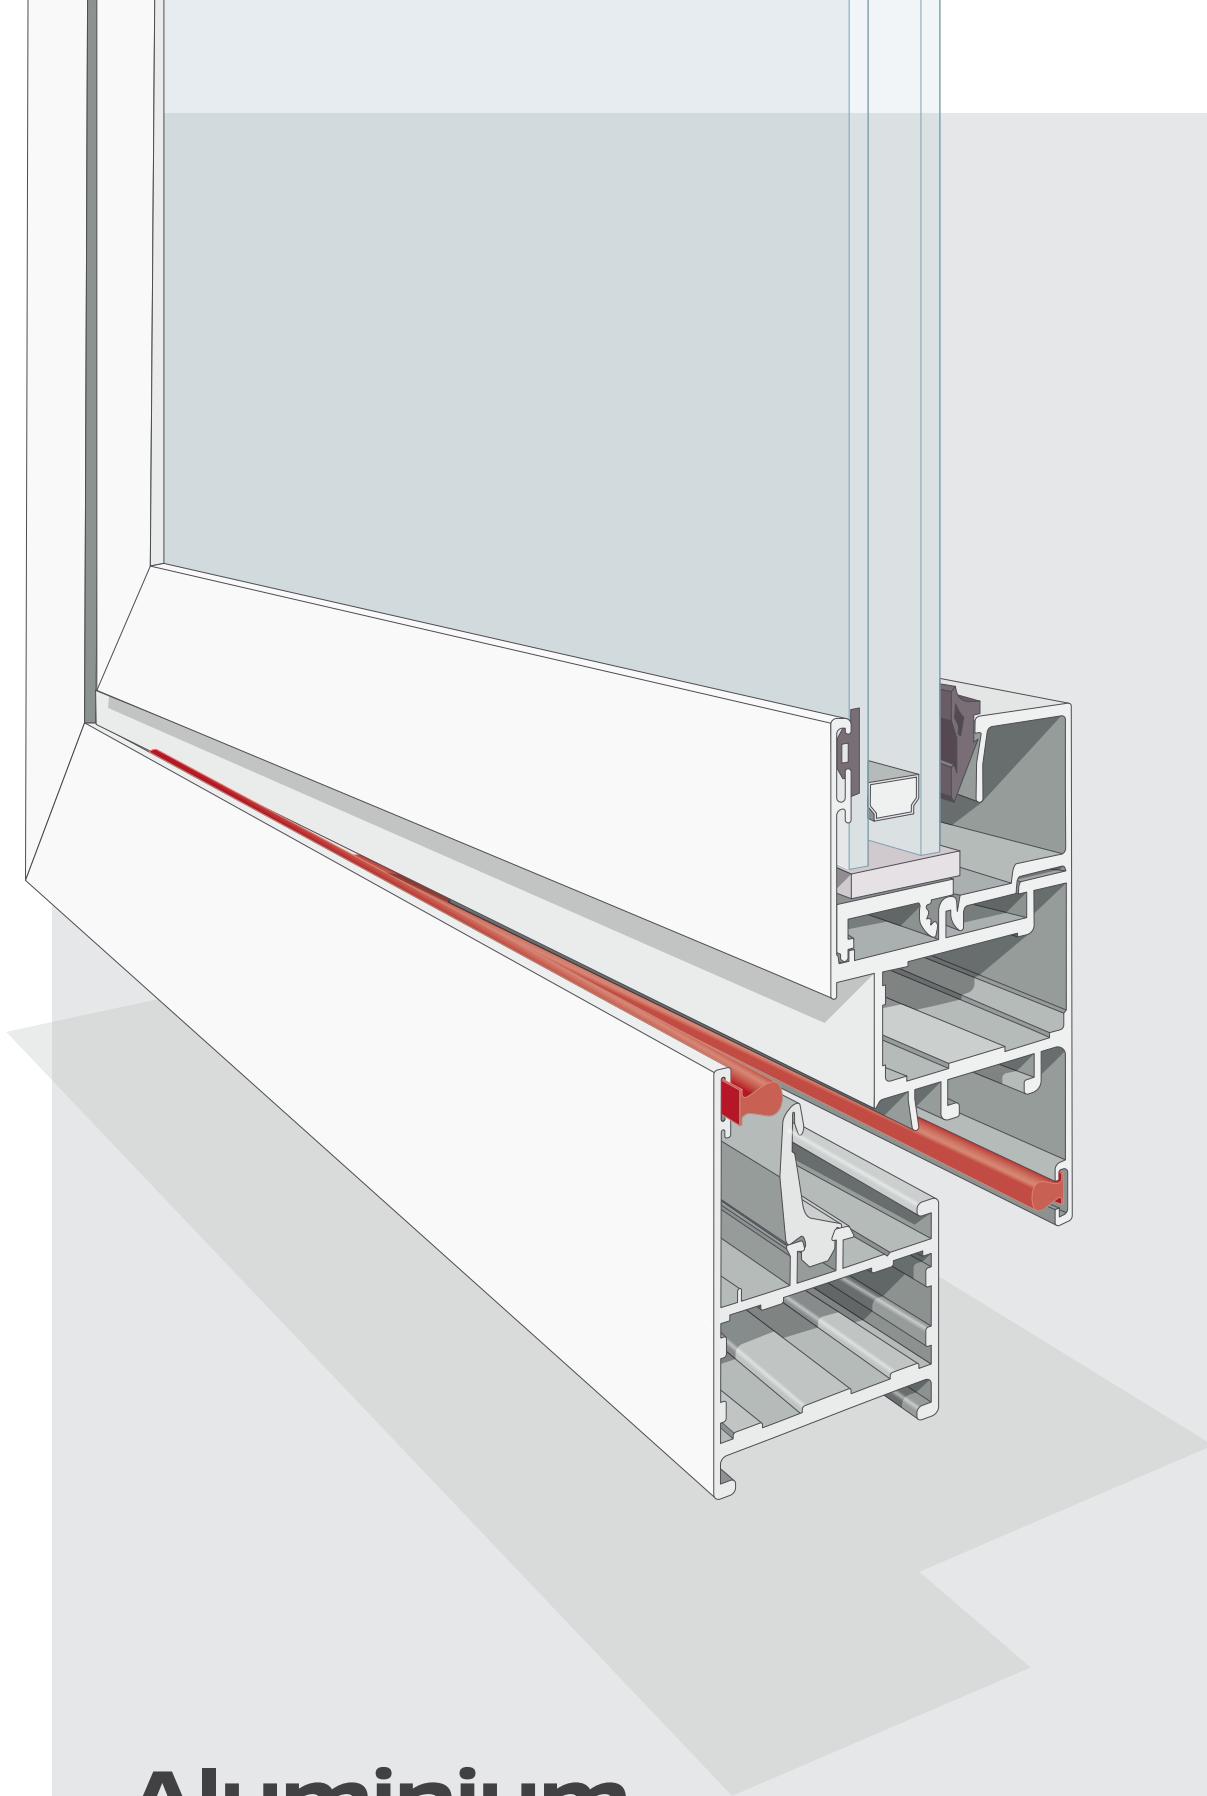

Aluminium

Applications on aluminium
doors and windows




QL 4636	2Q512	<p>Throat width: 3.2 Min. groove depth: 2.3 Seal gap: 1.0 - 2.5 Pack size: 300 m x 2</p> <p>Windows / other T-slot type A (5.3)</p> <p>Cradle to Cradle Certified® Bronze</p>	
QL 48100	2Q516	<p>Throat width: 3.2 Min. groove depth: 2.3 Seal gap: 5.5 - 7.0 Pack size: 250 m x 2</p> <p>Windows / doors / other T-slot type A (5.3)</p> <p>Cradle to Cradle Certified® Bronze</p>	
QL 4870	2Q517	<p>Throat width: 3.2 Min. groove depth: 2.3 Seal gap: 2.5 - 4.0 Pack size: 250 m x 2</p> <p>Windows / doors / other T-slot type A (5.3)</p> <p>W23266</p> <p>Cradle to Cradle Certified® Bronze</p>	
QL 48400	2Q518	<p>Throat width: 3.2 Groove depth: 2.3 Seal gap: 1.1 - 2.4 Pack size: 200 m x 2 700 m x 2 900 m x 2</p> <p>Windows / other T-slot type A (5.3)</p> <p>W16266</p> <p>Cradle to Cradle Certified® Bronze</p>	
QL 6970	2Q693	<p>Throat width: 4.6 Min. groove depth: 2.3 Seal gap: 2.5 - 4.0 Pack size: 250 m x 2</p> <p>Windows / doors / other T-slot type C (7.5)</p> <p>Cradle to Cradle Certified® Bronze</p>	
QL 48510	2Q532	<p>Throat width: 3.2 Groove depth: 2.3 Seal gap: 1.1 - 2.4 Pack size: 200 m x 2 500 m x 2 900 m x 2</p> <p>Windows / other T-slot type A (5.3)</p> <p>W15256</p> <p>Cradle to Cradle Certified® Bronze</p>	
QL 46105	2Q529	<p>Throat width: 3 - 3.2 Groove width: 5 - 5.6 Seal gap: 5 - 5.6 Pack size: 250 m x 2</p> <p>Overlap seal</p> <p>W36276</p> <p>Cradle to Cradle Certified® Bronze</p>	
QL 48650	2Q539	<p>Throat width: 3.2 Groove depth: 2.3 Seal gap: 1.8 - 3.4 Pack size: 200 m x 2 500 m x 2 800 m x 2</p> <p>Windows / other T-slot type A (5.3)</p> <p>W25256</p> <p>Cradle to Cradle Certified® Bronze</p>	
QL 46800	2Q577	<p>Throat width: 2.6 - 3.2 Groove width: 5 - 5.6 Seal gap: 3 - 3.5 Pack size: 250 m x 2</p> <p>Overlap seal</p> <p>W25266</p> <p>Cradle to Cradle Certified® Bronze</p>	
QL 48650 FR	2Q536	<p>Fire retardant</p> <p>Throat width: 3.2 Groove depth: 2.3 Seal gap: 1.8 - 3.4 Pack size: 500 m x 2</p> <p>Windows / other T-slot type A (5.3)</p> <p>W25256</p>	




QL 48700	2Q546		QL 57700	2Q623	
Windows / doors / other T-slot type A (5.3)			Windows / other T-slot type B (6.3)		
W15256			W25266		
Cradle to Cradle Certified® Bronze			Cradle to Cradle Certified® Bronze		
QL 48750	2Q553		QL 69100	2Q694	
Windows / other T-slot type A (5.3)			Windows / doors / other T-slot type C (7.5)		
W25266			W33276		
Cradle to Cradle Certified® Bronze			Cradle to Cradle Certified® Bronze		
QL 48750 FR	2Q554		QL 69400	2Q697	
Fire retardant			Windows / other T-slot type C (7.5)		
Throat width: 3.2			W15256		
Groove depth: 2.3			Cradle to Cradle Certified® Bronze		
Seal gap: 2.7 - 4.6					
Pack size: 600 m x 2					
Windows / other T-slot type A (5.3)					
W25266					
QL 48800	2Q560		QL 69510	2Q707	
Throat width: 3.2			Windows / other T-slot type C (7.5)		
Groove depth: 2.3			W15246		
Seal gap: 2.5 - 7.0			Cradle to Cradle Certified® Bronze		
Pack size: 250 m x 2					
Windows / doors / other T-slot type A (5.3)					
W34276					
Cradle to Cradle Certified® Bronze					
QL 48950	2Q567		QL 69650	2Q714	
Throat width: 3.2			Windows / other T-slot type C (7.5)		
Groove depth: 2.3			W15266		
Seal gap: 4.0 - 6.5			Cradle to Cradle Certified® Bronze		
Pack size: 200 m x 2 500 m x 2					
Windows / doors / other T-slot type A (5.3)					
W34266					
Cradle to Cradle Certified® Bronze					




QL 69700	2Q990
Throat width: 4.6	
Min. groove depth: 2.3	
Seal gap: 2.5 - 6.0	
Pack size: 250 m x 2	
Windows / doors / other	
T-slot type C (7.5)	
W33266	
Cradle to Cradle Certified® Bronze	




QL 70012	2Q943
Throat width: 4.6	
Groove depth: 7.5	
Seal gap: 4.5 - 8.5	
Pack size: 250 m x 2	
Windows / doors / other	
T-slot type C (7.5)	
W32266	




QL 69750	2Q721
Throat width: 4.6	
Groove depth: 2.3	
Seal gap: 2.7 - 4.6	
Pack size: 200 m x 2 500 m x 2	
Windows / other	
T-slot type C (7.5)	
W24266	
Cradle to Cradle Certified® Bronze	




QL 70013	2Q936
Throat width: 3.2	
Groove depth: 5.3	
Seal gap: 4.5 - 8.5	
Pack size: 250 m x 2	
Windows / doors / other	
T-slot type C (7.5)	
W32266	




QL 69800	2Q728
Throat width: 4.6	
Groove depth: 2.3	
Seal gap: 2.5 - 7.0	
Pack size: 250 m x 2	
Windows / doors / other	
T-slot type C (7.5)	
W34266	
Cradle to Cradle Certified® Bronze	



QL 69950	2Q742
Throat width: 4.6	
Groove depth: 2.3	
Seal gap: 4.0 - 6.5	
Pack size: 200 m x 2 350 m x 2	
Windows / doors / other	
T-slot type C (7.5)	
W34266	
Cradle to Cradle Certified® Bronze	



T-Slot dimensions

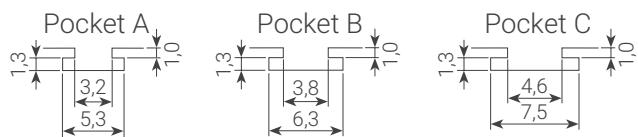




Q-LON

Brush pile

Extruded

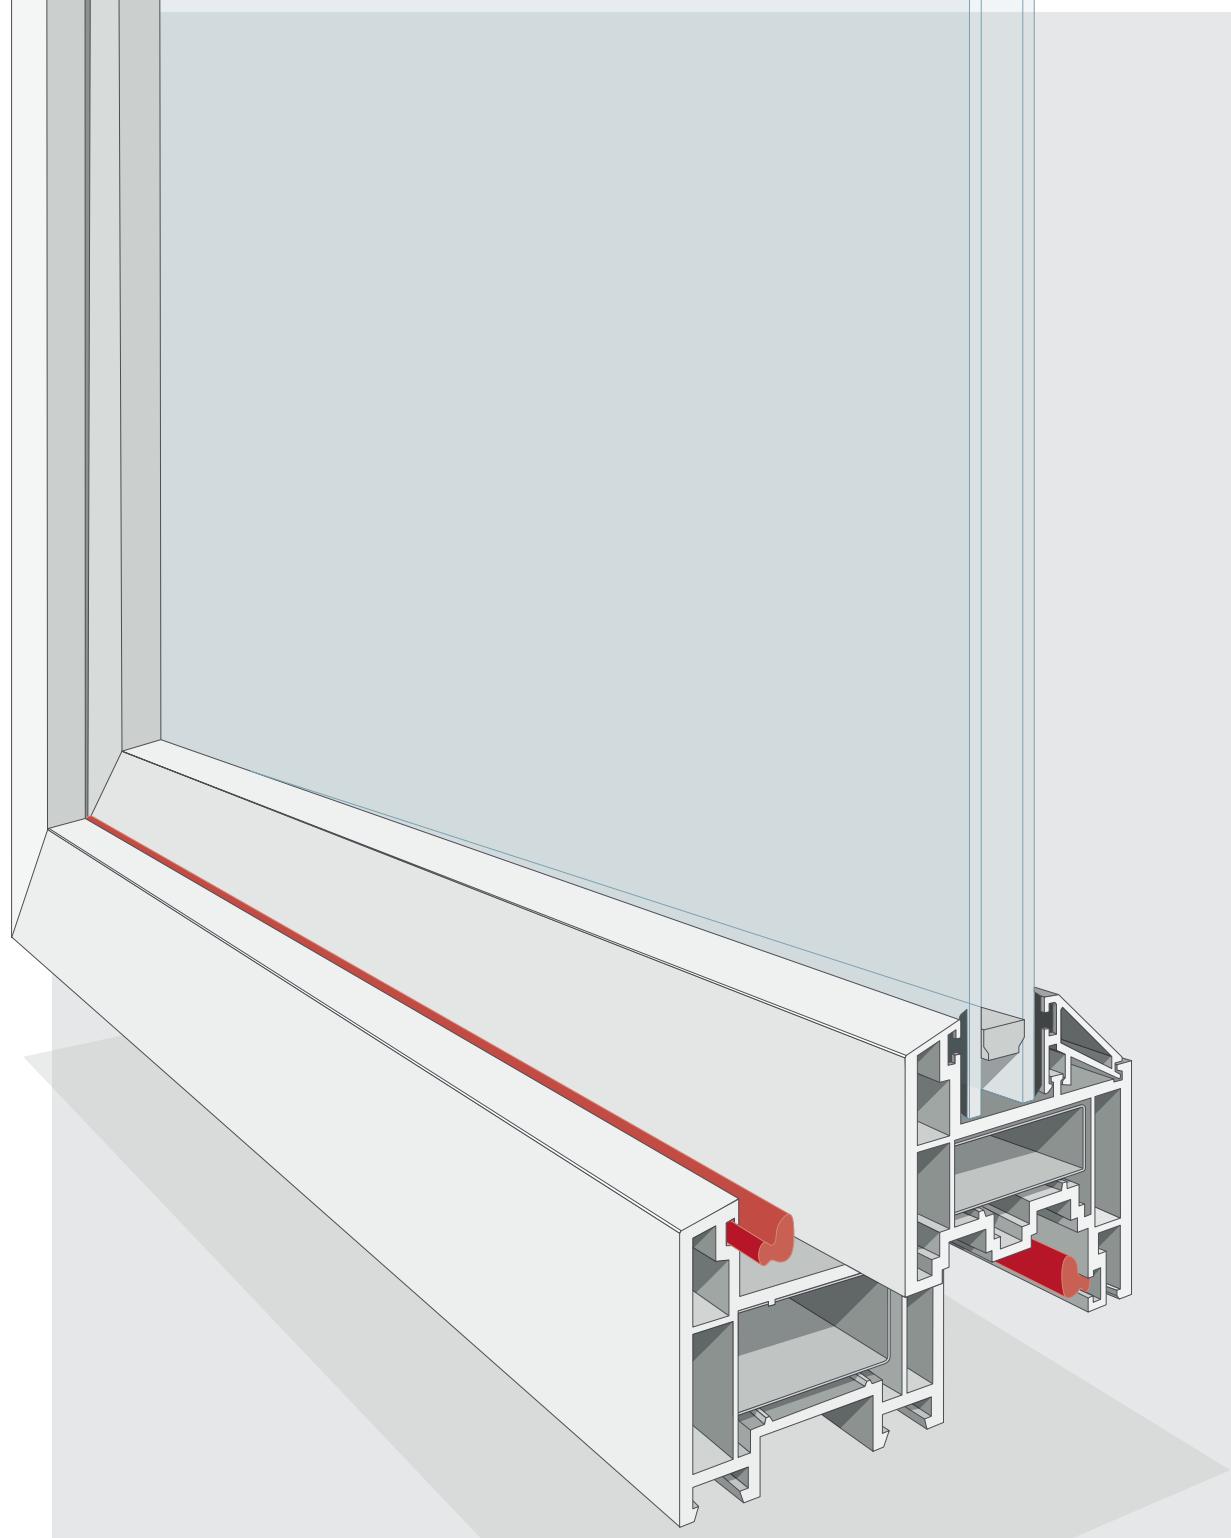

PVCu

Aluminium doors and window applications



QL 4465	2Q505	
Throat width: 4.2		
Min. groove depth: 5.7		
Seal gap: 3.0 - 4.8		
Pack size: 250 m x 2		
Doors / windows		
W25266		
Cradle to Cradle Certified® Bronze		
QL 4636	2Q512	
Throat width: 3.2		
Min. groove depth: 2.3		
Seal gap: 1.0 - 2.5		
Pack size: 300 m x 2		
Windows		
T-slot type A (5.3 mm)		
Cradle to Cradle Certified® Bronze		
QL 5570	2Q602	
Throat width: 3.3		
Min. groove depth: 5.5		
Seal gap: 3.0 - 4.8		
Pack size: 250 m x 2		
Windows		
W24266		
Cradle to Cradle Certified® Bronze		
QL 6571	2Q680	
Throat width: 3.0		
Min. groove depth: 4.9		
Seal gap: 3.0 - 5.0		
Pack size: 250 m x 2		
Windows		
W35266		
Cradle to Cradle Certified® Bronze		
QL 6991	2Q735	
Throat width: 3.9		
Min. groove depth: 5.3		
Seal gap: 2.0 - 3.2		
Pack size: 300 m x 2		
Windows		
W25266		
Cradle to Cradle Certified® Bronze		

QL 7307	2Q770	
Throat width: 3.2		
Min. groove depth: 4.8		
Seal gap: 2.8 - 4.4		
Pack size: 250 m x 2		
Windows		
W35276		
Cradle to Cradle Certified® Bronze		
QL 9005	2Q785	
Throat width: 2.4		
Min. groove depth: 5.2		
Seal gap: 2.5 - 4.1		
Pack size: 300 m x 2		
Windows		
W24266		
Cradle to Cradle Certified® Bronze		
QL 9100	2Q791	
Throat width: 2.4		
Min. groove depth: 5.3		
Seal gap: 2.7 - 4.4		
Pack size: 250 m x 2		
Windows		
W35276		
Cradle to Cradle Certified® Bronze		
QL 9112	2Q819	
Throat width: 3.2		
Min. groove depth: 4.8		
Seal gap: 3.0 - 4.9		
Pack size: 300 m x 2		
Windows		
W35276		
Cradle to Cradle Certified® Bronze		
QL 9154	2Q834	
Throat width: 3.2		
Min. groove depth: 4.7		
Seal gap: 2.8 - 4.5		
Pack size: 300 m x 2		
Windows		
W35266		
Cradle to Cradle Certified® Bronze		



QL 9257	2Q842	
Throat width: 3.2 Min. groove depth: 4.4 Seal gap: 4.5 - 7.1 Pack size: 300 m x 2		
Doors / windows		
W33276		
Cradle to Cradle Certified® Bronze		
QL 9489	2Q855	
Throat width: 3.4 Min. groove depth: 4.0 Seal gap: 2.5 - 4.0 Pack size: 250 m x 2		
Doors / windows		
W26276		
Cradle to Cradle Certified® Bronze		
QL 9536	2Q861	
Throat width: 3.9 Min. groove depth: 6.3 Seal gap: 4.0 - 8.0 Pack size: 250 m x 2		
Doors		
W43276		
QL 9596	2Q873	
Throat width: 3.4 Min. groove depth: 5.2 Seal gap: 2.5 - 4.0 Pack size: 300 m x 2		
Windows		
W26276		
QL 9646	2Q878	
Throat width: 3.6 Min. groove depth: 5.1 Seal gap: 3.5 - 5.5 Pack size: 250 m x 2		
Windows		
W35276		
Cradle to Cradle Certified® Bronze		

QL 9688	2Q882	
Throat width: 2.8 Min. groove depth: 3.9 Seal gap: 3.0 - 7.0 Pack size: 400 m x 2		
Doors / windows		
W33276		
Cradle to Cradle Certified® Bronze		
QL 9898	2Q911	
Throat width: 3.2 Min. groove depth: 4.9 Seal gap: 3.0 - 5.5 Pack size: 300 m x 2		
Windows		
W35276		
Cradle to Cradle Certified® Bronze		
QL 9926	2Q931	
Throat width: 3.2 - 3.4 Min. groove depth: 5.0 Seal gap: 3.0 - 7.5 Pack size: 300 m x 2		
Doors / windows		
W33276		
Cradle to Cradle Certified® Bronze		
QL 9928	2Q940	
Throat width: 3.2 - 3.4 Min. groove depth: 3.9 Seal gap: 3.0 - 7.5 Pack size: 300 m x 2		
Doors / windows		
W34276		
Cradle to Cradle Certified® Bronze		

Q-LON FOR SLIDING DOORS



Low friction
No linear damage
after **40,000** cycles

Compared with common brush seals, Q-LON offers highly superior air/water tightness, noise insulation performance and styling. Tested for friction damage on sliding doors to 40,000 cycles.

Schlegel



Accessories



Q-LON

Q-LON cover cap

For French windows

Special colour-coordinated caps made from resistant HDPE for various groove and rebate dimensions.

For Q-LON seal	Part No.	SAP Part No.	Groove	Rebate
QL 3053	MIS-9124	2Q982	4.0	12.0
	MIS-9125	2Q985	5.0	
	MIS-9184	2Q986	4.0	18.0 – 20.0
	MIS-9185	2Q983	5.0	
QL 3054	MIS-9103	2Q980	3.0	10.0

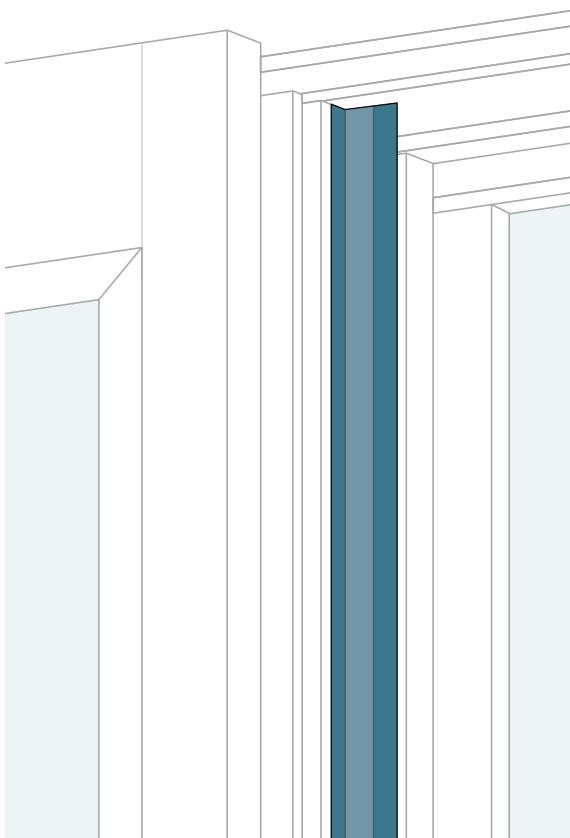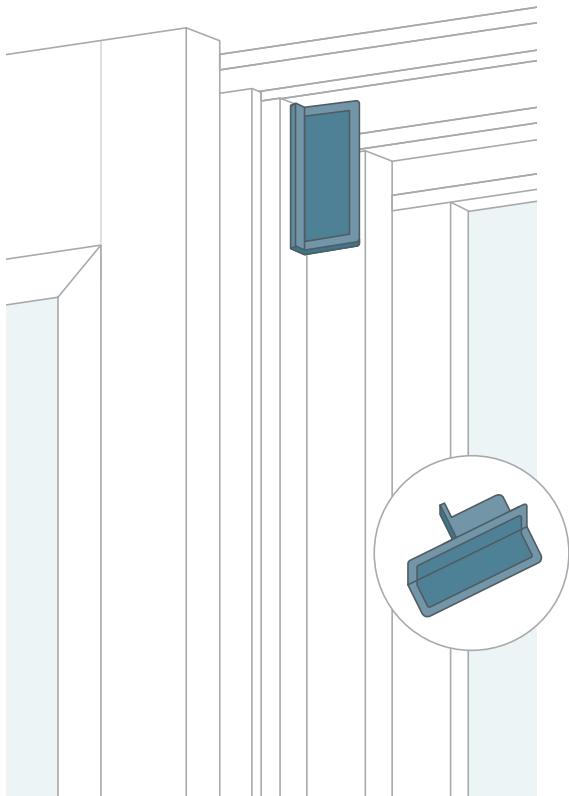

Lozaron cover profiles

For French windows

Colour coordinated profile made from TPE, compatible with acrylic paint.

For Q-LON seal	Part No.	SAP Part No.	Groove	Rebate
QL 3053	DX 1362	26070	4.0 – 5.0	12 + 18 – 20

4,0 - 5,0

18,0 - 20,0

Extruded

Q-LON



Instructions

Q-LON profile installation



Step 1

The Q-LON profile is pressed into the groove at the centre of the sash.

Step 2

The Q-LON pliers are placed in the rebate corner with the stop and a 90° mitre is cut out.

Step 3

The final cut: by positioning the pliers against the profile as shown, the final cut is made based on the precise length.

Corner jointing with silicone mastic



Timber

Bonding of interrupted butt joint.

Timber

Bonding of mitre-cut joint.

PVCu and aluminium

Enhancement of continuous seal.

Colourless Wacker Elastosil AO7 RTV-1 silicone rubber / adhesive (or equivalent)

Tools



QL MIS-9001-99 MITRE CUTTERS 90°

With an insertion roller for 90° and end cuts for assembly in the frame.

Part no.:
2T00000001



QL INSERTION ROLLER

Manual profile roller.

Part no.:
2T005000



Q-LON OVERLAP INSERTION ROLLER

Manual profile roller.

Part no.:
2T030000

Brush pile seals and sealing profiles

For timber, aluminium and PVC applications



Index


Materials and colours	51
Selector	57
Certifications	58
Quality control	61
Technical specifications	
Brush pile seals	62
Poly-Bond (PB) : woven brush pile seals	63
Fin-Seal (FS) : woven brush pile seals	64
Dust-Plug (DP) : woven brush pile seals	65
Shutter-Pile (SP) : woven brush pile seals	66
Power-Pile (PW) : extruded brush pile seals	67
Fin-Pile (FP) : extruded brush pile seal	68
G3 : extruded brush pile seals	69
G3-QF (Quadrafin) : extruded brush pile seals	70
Bi-Fin (BF) : extruded brush pile seals	71
Angle-Pile (AP) : extruded brush pile seals	72
Skirting-Fringe (SF) : extruded brush pile seals	73
Flex-Brush (FB) : coilable brush pile seals	74
Kerf-Pile (KP) : extruded brush pile seals	75
Combination brush pile seals	76
For universal surface fitting	77
For kerf-slot fitting	77
Carriers for brush pile seals	78



Materials and colours

Seals made from virgin polypropylene (PP) yarn.

- Available in many different widths and heights
- Different densities depending on seal type, width and mounting distance
- Heat setting for recovery after compression
- With optional adhesive backing based on hot-melt (HM) glue technology

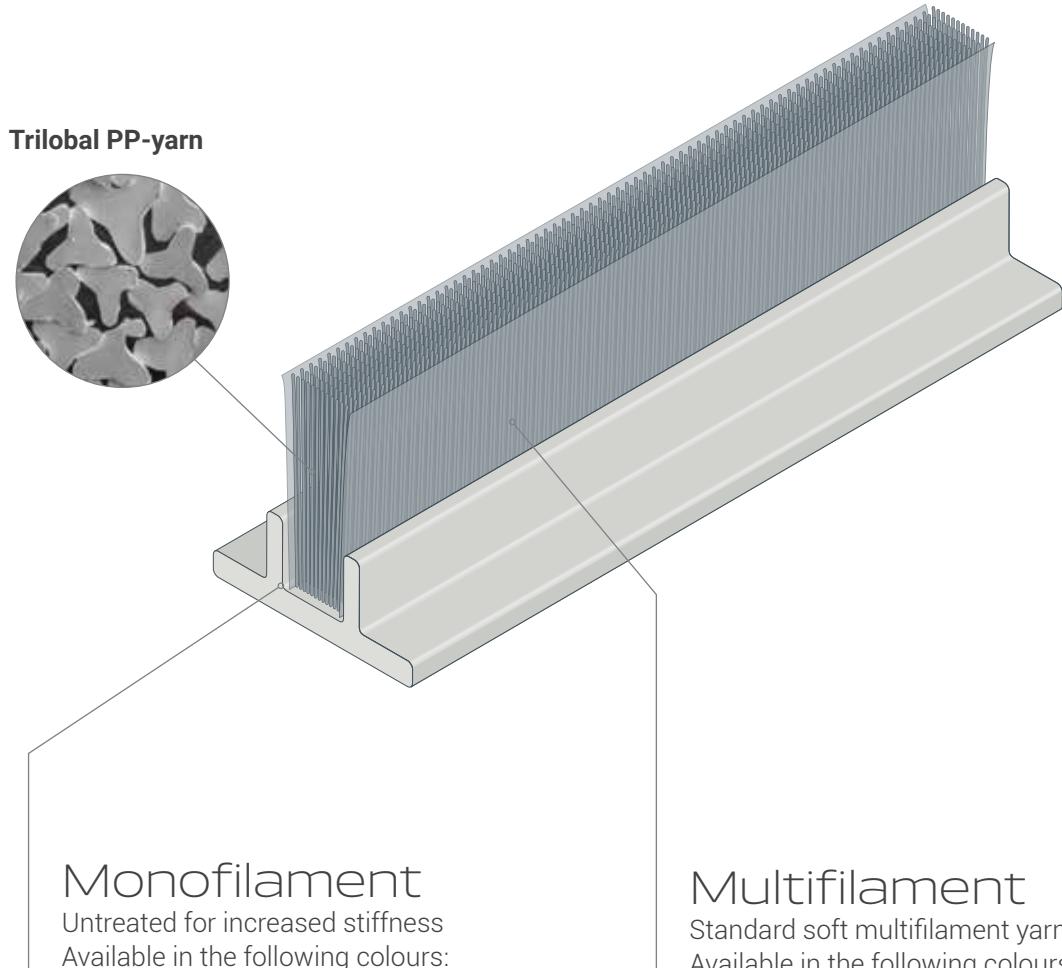

Monofilament

Untreated for increased stiffness
Available in the following colours:

Standard Colours

■ GREY / RAL 7045 / Code 277

■ BLACK / RAL 9005 / Code 288

Multifilament

Standard soft multifilament yarn
Available in the following colours:

Standard Colours

■ GREY / RAL 7045 / Code 277

■ BLACK / RAL 9005 / Code 288


Extra Colours

■ WHITE / RAL 9003 / Code 287

■ BROWN / RAL 8028 / Code 264

■ BEIGE / RAL 1011 / Code 241

EASY SLIDING

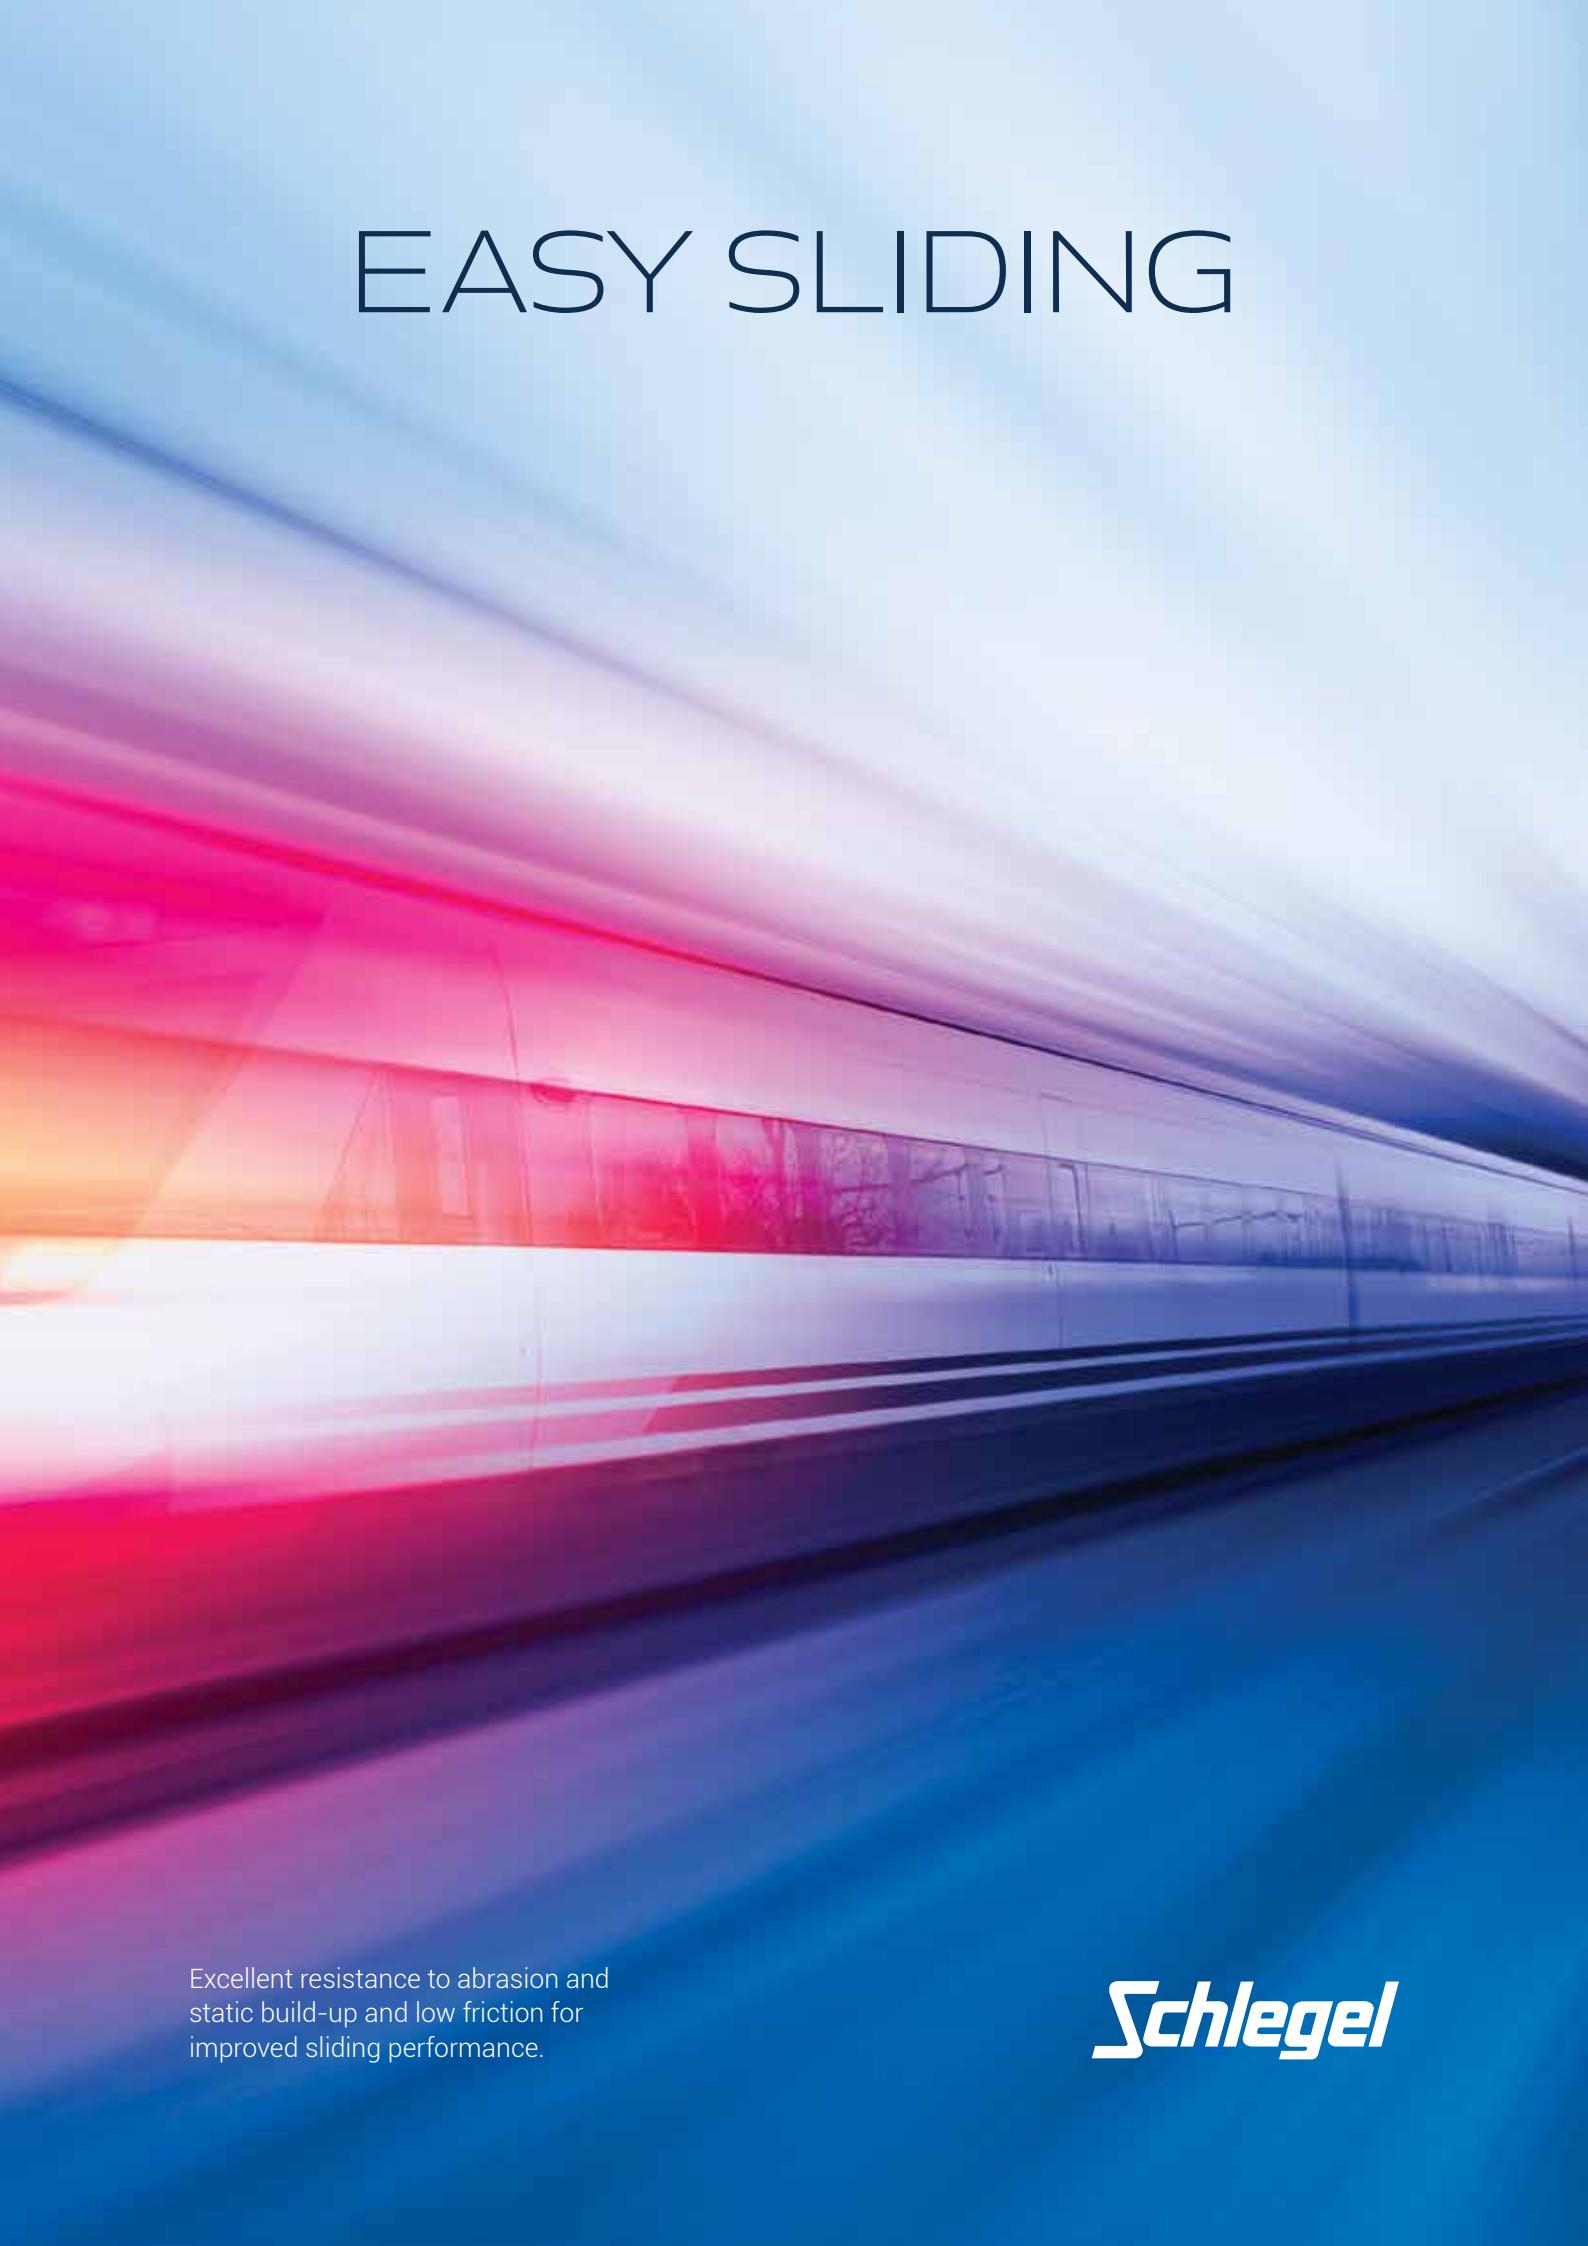

Excellent resistance to abrasion and static build-up and low friction for improved sliding performance.

Schlegel

DURABLE




UV stable and chemically inert for prolonged life.

Schlegel

Selector

Brush pile seals

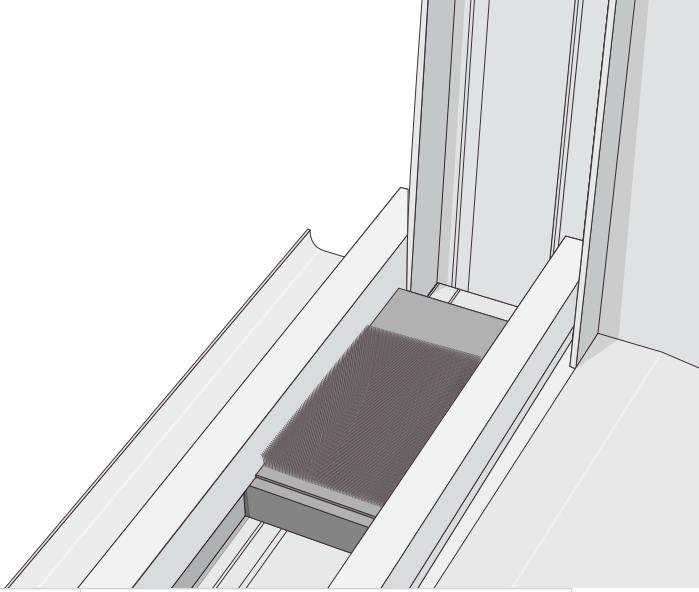

Q-LON

Brush pile

Extruded

	Product application area				Product dimensions				Brush pile and backing characteristics and options								
	Sliding window	Sliding door	Window covering	Furniture	Carrier width		Brush height		Angle	Filament type	Density	Adhesive (Hot Melt)	Fin position	Fin height	Optimised for auto insertion	Page	
					Min	Max	Min	Max									
WOVEN CARRIER																	
POLY-BOND	x	x	x	x	4.8 / 6.7 / 6.9	3.5	15.0	90°	Multi	4P	Optional	–	–	–	20		
FIN-SEAL	x	x	x	–	4.8 / 6.7 / 6.9	3.5	15.0	90°	Multi	4P	Optional	Centre	0 / 1	–	21		
EXTRUDED CARRIER																	
POWER-PILE	x	x	x	x	4.8 / 6.7 / 6.9	5.0	20.0	90°	Multi	4P	–	–	–	x	22		
FIN-PILE	x	x	x	–	4.8 / 6.7 / 6.9	5.0	20.0	90°	Multi	4P	–	Centre	0	x	23		
G3	x	x	x	–	4.8 / 6.7 / 6.9	4.0	20.0	90°	Multi	4P	–	Centre	0 / 1	x	24		
G3-QF QUADRAFIN	x	x	x	–	4.8 / 6.7 / 6.9	6.0	12.0	90°	Multi	4P	–	Centr./ Later.		x	25		
BI-FIN	x	x	x	–	4.8 / 6.7 / 6.9	6.0	20.0	90°	Multi	4P	–	Lateral	0	x	26		
SPECIAL PRODUCTS																	
ANGLE-PILE	–	–	x	–	4.8 / 6.9	9.0	22.0	45° / 60°	Mono	24	–	–	–	x	27		
DUST-PLUG	x	x	–	x	10.0	60.0	3.0	22.0	90°	Mono Multi	–	Optional	Optional	Optional	–	28	
SHUTTER-PILE	–	–	x	–	4.8 / 6.7 / 6.9	3.0	15.0	90°	Mono Multi	2P / 3P	Optional	–	–	–	29		
SKIRTING FRINGE	x	x	x	–	2.7 / 2.9 / 3.1 / 3.3	5.0	30.0	90°	Mono	24	–	–	–	x	30		
	x	x	x	–	2.7 / 2.9 / 3.1 / 3.3	5.0	30.0	90°	Multi	4P	–	–	–	x	30		
FLEX-BRUSH	x	x	–	–	3.5	5	10.0	50.0	90°	Mono	HD15 / SD15	–	–	–	–	31	
KERF-PILE	x	x	–	–	Groove width: 3	5.0	25.0	90°	Multi	5P	–	–	–	x	32		

For more details and options see the rest of this catalogue, or consult www.schlegelgriesse.com.




VERY LOW AIR PERMEABILITY

The central and lateral fins offer
better air tightness.

Schlegel

Comparative air permeability test

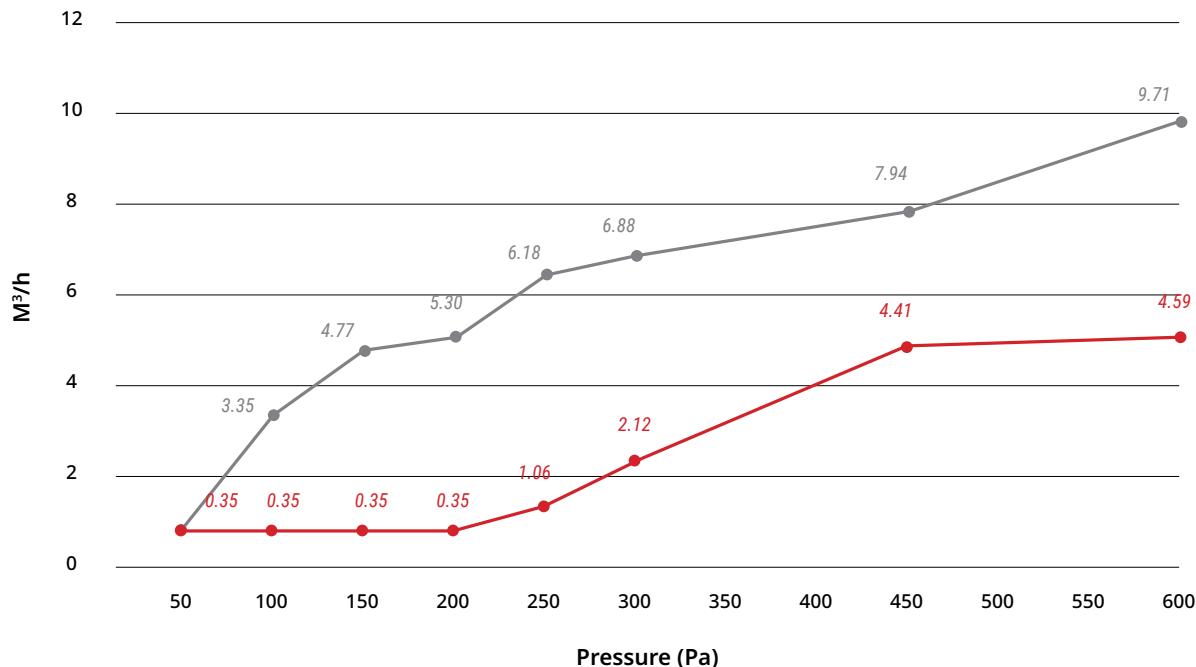

Competitor

Brush Pile with central fin +0.5 mm
with 20% compression.

Schlegel G3-QF (Quadrafin)

Brush Pile with central fin +1 mm
with 20% compression

Comparative test carried out on one linear meter brushpile weatherstripping following the pressure increments according to EN 12207

RESISTANCE



PP yarn treated with silicone to resist water,
mould and mildew.

Schlegel

Quality control

The standard tests conducted by Schlegel in its Aycliffe laboratories are:

- QUV - accelerated weathering test
- Air permeability - the amount of air entering through the seal at various pressures (in accordance with EN 1026)
- Recovery after long-term compression - to analyse permanent deflection after long-term compression (according to EN 12365:2003 IFT Laboratory certificate)
- Wear resistance - simulation of sliding/scrubbing for 100,000 cycles

Our products are manufactured to meet the requirements of our many international customers in different industries. We use a Quality Management System registered and certified to the ISO 9001:2015 standard and an Environmental Management System to ISO 14001:2015.

We invite you to browse through our range in this brochure or on our website, where you can use our product filter to find the right brush pile seal for you. Please contact us for any further information or specific requirements.

Manufactured to ISO 45001:2018

Health & Safety Standard

Manufactured to ISO 9001:2015

Quality Control System

Manufactured to ISO 14001:2015

Environmental Control System






Q-LON

Brush pile

Extruded

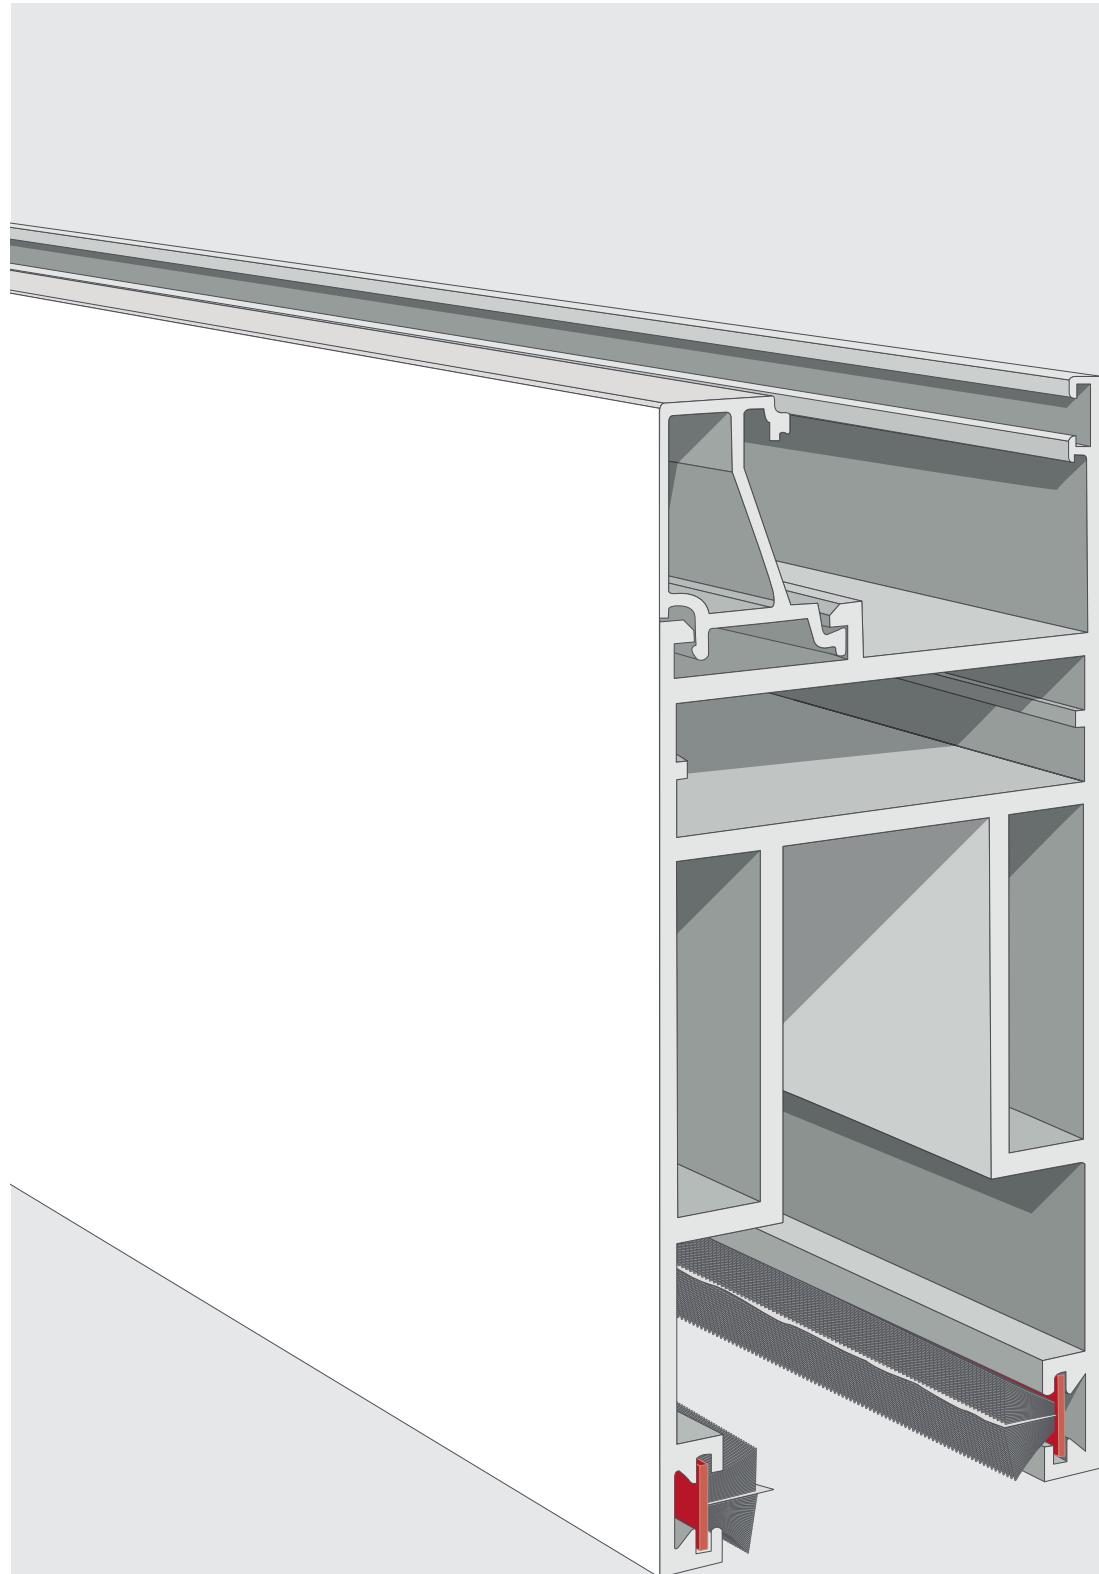

Brush pile seals



Q-LON


Brush pile

Extruded

Poly-Bond (PB)

woven brush pile seals


Soft silicone treated multifilament pile yarn on a woven reinforced translucent backing for all common economy sealing applications.
Optional adhesive backing.

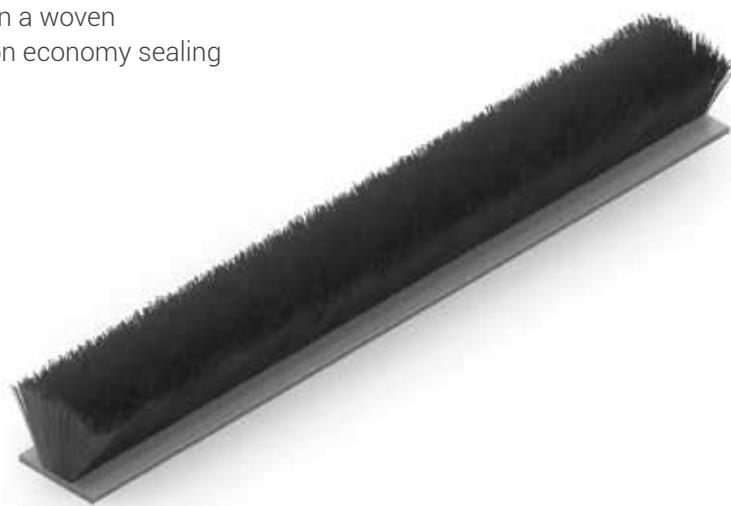

Dimensions			
	4.8	6.7	6.9
H	5.3	7.5	7.7
I	3.2	3.2	3.2
J	1.3	1.3	1.3

Minimum clearance recommended: +0.5 mm of backing width chosen

Other dimension available with special conditions for minimum order quantities, lead time, packaging and price may apply

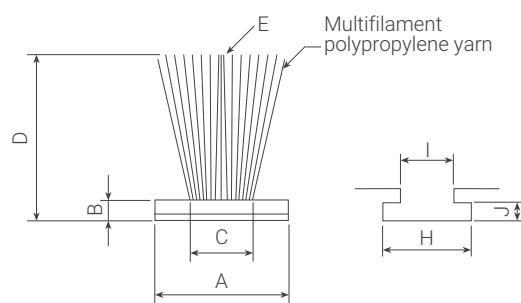

Standard solutions			
A Backing width*	B Backing thickness	D Brush height	E Brush density (P)
4.8 +0.1/-0.2mm	0.8 ± 0.15 mm	3.5 (+0.25/-0.15 mm) 4 (+0.25/-0.15 mm) 4.5 (+0.25/-0.15 mm) 5 (+0.25/-0.15 mm) 5.5 (+0.25/-0.15 mm) 6 (+0.25/-0.15 mm) 6.5 (+0.25/-0.15 mm) 7 (+4%/-2,5%) 8 (+4%/-2,5%) 9 (+4%/-2,5%) 10 (+4%/-2,5%) 11 (+4%/-2,5%) 12 (+4%/-2,5%) 13 (+4%/-2,5%) 14 (+4%/-2,5%) 15 (+4%/-2,5%)	4P
6.7 +0.1/-0.25mm			
6.9 +0.1/-0.25mm			

*With optional hot-melt (HM) adhesive • Note: total height will increase up to 0.5 mm if hot-melt requested

Colours
Multifilament pile yarn colours
Grey RAL 7045
Black RAL 9005

Other colours available with special conditions for minimum order quantities, lead time and price may apply.




Fin-Seal (FS)

woven brush pile seals

Soft silicone treated multifilament pile yarn on a woven reinforced translucent backing. With welded clear central fin for improved weather sealing of sliding windows and doors. Optional adhesive backing. Optional adhesive backing.



Dimensions			
	4.8	6.7	6.9
H	5.3	7.5	7.7
I	3.2	3.2	3.2
J	1.3	1.3	1.3
Minimum clearance recommended: +0.5 mm of backing width chosen			
Other dimension available with special conditions for minimum order quantities, lead time, packaging and price may apply			

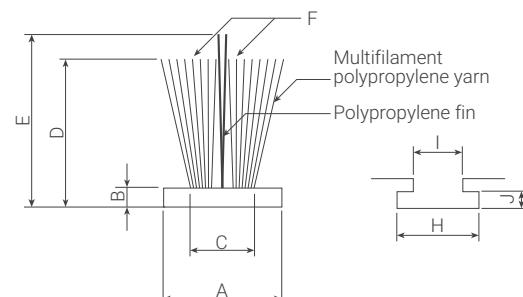

Standard solutions				
A Backing width*	B Backing thickness	D Brush height	E Fin height**	F Brush density (P)
4.8 +0.1/-0.2mm 6.7 +0.1/-0.25mm 6.9 +0.1/-0.25mm	0.8 ± 0.15 mm	3.5 (+0.25/-0.15 mm)	3.5 (+/-0.25 mm)	4P
		4 (+0.25/-0.15 mm)	4 (+/-0.25 mm)	
		4.5 (+0.25/-0.15 mm)	4.5 (+/-0.25 mm)	
		5 (+0.25/-0.15 mm)	5 (+/-0.25 mm)	
		5.5 (+0.25/-0.15 mm)	5.5 (+/-0.25 mm)	
		6 (+0.25/-0.15 mm)	6 (+/-0.25 mm)	
		6.5 (+0.25/-0.15 mm)	6.5 (+/-0.25 mm)	
		7 (+4%/-2.5%)	7 (+0.5mm/-0.25 mm)	
		8 (+4%/-2.5%)	8 (+0.5mm/-0.25 mm)	
		9 (+4%/-2.5%)	9 (+0.5mm/-0.25 mm)	
		10 (+4%/-2.5%)	10 (+0.5mm/-0.25 mm)	
		11 (+4%/-2.5%)	11 (+0.5mm/-0.25 mm)	
		12 (+4%/-2.5%)	12 (+/-0.5 mm)	
		13 (+4%/-2.5%)	13 (+/-0.5 mm)	
		14 (+4%/-2.5%)	14 (+/-0.5 mm)	
		15 (+4%/-2.5%)	15 (+/-0.5 mm)	

*With optional hot-melt (HM) adhesive • Note: total height will increase up to 0.5 mm if hot-melt requested

**With optional black non-woven (NW) silent fin

Colours	
Multifilament pile yarn colours	
Grey RAL 7045	Black RAL 9005

Other colours available with special conditions for minimum order quantities, lead time and price may apply.



Dust-Plug (DP)

woven brush pile seals

Soft silicone treated multifilament pile yarn on a woven reinforced translucent backing. Available cut-to-size and in lengths for specific and generally wider sealing applications like in corners of sliding doors or furniture. Optional adhesive backing, fins and untreated monofilament edges.



Other dimension available with special conditions for minimum order quantities, lead time, packaging and price may apply					

Standard solutions					
A Carrier width*	B Backing thickness	C Pile carrier width	D Brush and optional central fin height	F=A-C	
10 ≤ L ≤ 60 ± 0.5 mm with 0.5 mm intervals	0.8 ± 0.15 mm	6 ≤ L ≤ 56 ± 1.0 mm	5 ≤ D ≤ 6.5 mm (+0.25/-0.15 mm) with 0.50 mm intervals	Min. 2 mm	
			6.5 <= D <= 22 mm (+4%/-2.5% with 1 mm intervals)		
			Fin D > 5 mm (+0.25/-0.15 mm) with 0.50 mm intervals		
			Fin level only (+0.50/-0.50 mm)		

Other configurations upon request: • Strengthening monofilament edges • Fin alternatives under design

*With optional hot-melt adhesive (HM). Note: total height will increase up to 0.5 mm if hot-melt requested.

Colours	
Multifilament pile yarn colours	
Grey RAL 7045	Black RAL 9005

Other colours available with special conditions for minimum order quantities, lead time and price may apply.

Q-LON

Brush pile

Extruded




Shutter-Pile (SP)

woven brush pile seals

Woven pile on a translucent backing. Soft silicone treated multifilament yarn, partially strengthened with stiffer untreated monofilament. It is typically inserted in T-slots of side guiding channels for sealing of roller shutters and similar products. Optional adhesive backing.



Dimensions			
	4.8	6.7	6.9
H	5.3	7.5	7.7
I	3.2	3.2	3.2
J	1.3	1.3	1.3
Minimum clearance recommended: +0.5 mm of backing width chosen			
Other dimension available with special conditions for minimum order quantities, lead time, packaging and price may apply			

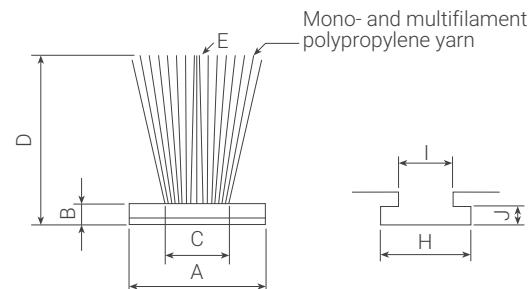

Standard solutions			
A Backing width*	B Backing thickness	D Brush height	E Brush density (P) in line (L) with monofilament (M)
4.8 +0.10/-0.15 mm 6.7 +0.10/-0.20 mm 6.9 +0.10/-0.20 mm	0.8 ± 0.15 mm	3.0 ≤ D ≤ 6.5 mm (+0.25/-0.15 mm) with 0.50 mm intervals	2P1L1M 3P1L1M
		6.5 < D ≤ 10.0 mm with 0.5 mm intervals (4%/-2.5% mm)	
		10.0 ≤ D ≤ 15.0 mm (+4%/-2.5% mm) with 1.0 mm intervals	

*With optional hot-melt (HM) adhesive • Note: total height will increase up to 0.5 mm if hot-melt requested

Colours	
Multifilament pile yarn colours	
Black RAL 9005	Grey RAL 7045

Colours	
Monofilament pile yarn colours	
Black RAL 9005	Grey RAL 7045


Other colours available with special conditions for minimum order quantities, lead time and price may apply.




Power-Pile (PW)

extruded brush pile seals

Soft silicone treated multifilament pile yarn on an extruded base with upstanding directors. Guaranteed on centre pile, more suitable for machine insertion. Optional adhesive backing.

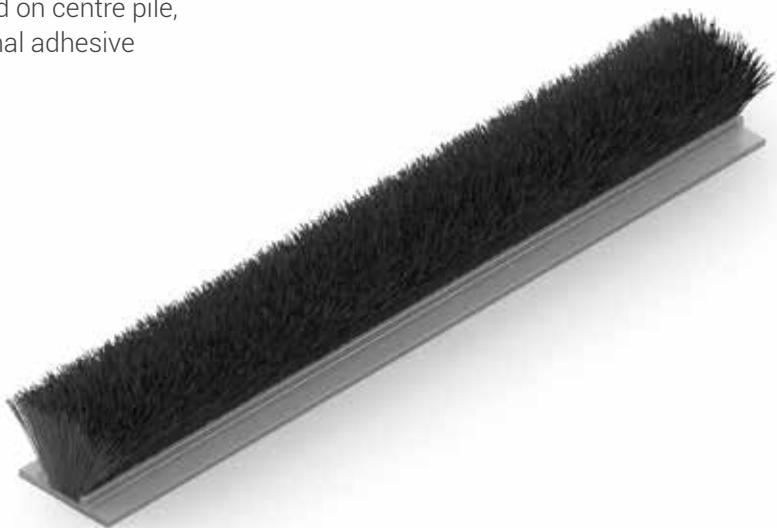

Dimensions			
	4.8	6.7	6.9
H	5.3	7.5	7.7
I	3.2	3.2	3.2
J	1.3	1.3	1.3
Minimum clearance recommended: +0.5 mm of backing width chosen			
Other dimension available with special conditions for minimum order quantities, lead time, packaging and price may apply			

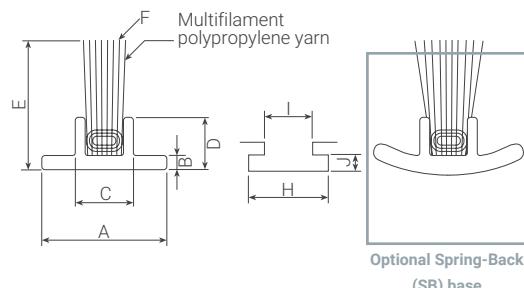

Standard solutions					
A Backing width	B Backing thickness	C Directors width	D Directors height	E Brush height	F Brush density (P)
4.8 ± 0.2 mm	0.65 ± 0.1 mm	2.5 ± 0.3 mm	2.4 ± 0.3 mm	5.0 ≤ E ≤ 8.0 mm (+0.50/-0.50 mm) with 0.50 mm intervals	4P
6.7 ± 0.2 mm				8.0 < E ≤ 25.0 mm (+0.50/-0.50 mm) with 1.0 mm intervals	

Colours	
Multifilament pile yarn colours	
Grey RAL 7045	Black RAL 9005

Other colours available with special conditions for minimum order quantities, lead time and price may apply.




Fin-Pile (FP)

extruded brush pile seals

Soft silicone treated multifilament pile yarn on an extruded base with upstanding directors. Guaranteed on centre pile, more suitable for machine insertion. Two clear central fins keep the brush visually intact while providing improved weather sealing for sliding windows and doors. Optional adhesive backing.



Dimensions			
	4.8	6.7	6.9
H	5.3	7.5	7.7
I	3.2	3.2	3.2
J	1.3	1.3	1.3
Minimum clearance recommended: +0.5 mm of backing width chosen			
Other dimension available with special conditions for minimum order quantities, lead time, packaging and price may apply			

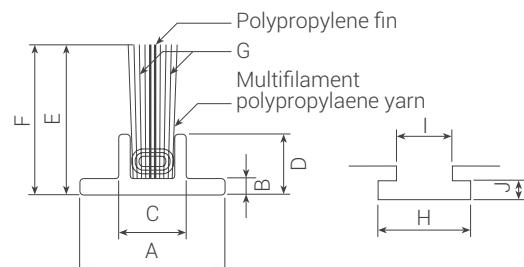

Standard solutions						
A Backing width	B Backing thickness	C Directors width	D Directors height	E Brush height	F Fin height* (≥ 5 mm)	G Brush density (P)
4.8 ± 0.2 mm	0.65 ± 0.1 mm	2.6 ± 0.3 mm	2.6 ± 0.3 mm	5 ≤ E ≤ 8 mm (+0.50/-0.50 mm) with 0.50 mm intervals	Level only (+0.50/-0.50 mm)	4P
6.7 ± 0.2 mm				E ≤ 20 mm (+0.50/-0.50 mm) with 1 mm intervals		

*With optional black non-woven (NW) silent fin

Colours	
Multifilament pile yarn colours	
Grey RAL 7045	Black RAL 9005

Other colours available with special conditions for minimum order quantities, lead time and price may apply.




G3

extruded brush pile seals

Soft silicone treated multifilament yarn on an extruded base. Guaranteed on centre pile, more suitable for machine insertion.

With clear central fin for improved weather sealing of sliding windows and doors.
Optional adhesive backing.

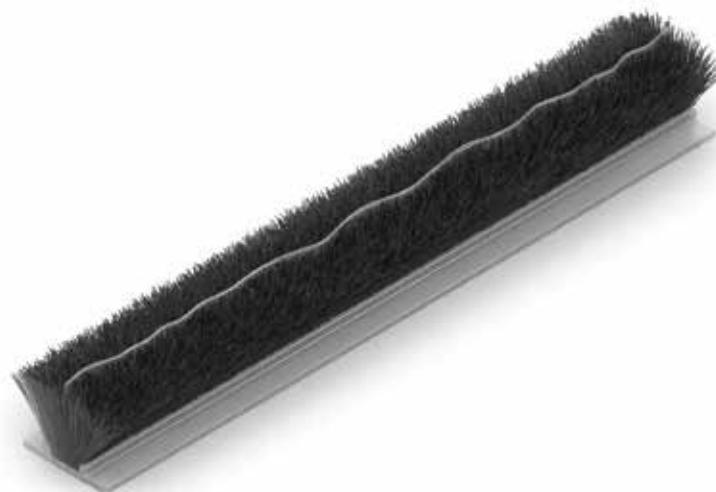

Dimensions			
	4.8	6.7	6.9
H	5.3	7.5	7.7
I	3.2	3.2	3.2
J	1.3	1.3	1.3
Minimum clearance recommended: +0.5 mm of backing width chosen			
Other dimension available with special conditions for minimum order quantities, lead time, packaging and price may apply			

Standard solutions						
A Backing width	B Backing thickness	C Directors width	D Directors height	E Brush height	F Fin height* (≥ 5 mm)	G Brush density (P)
4.8 ± 0.2 mm 6.7 ± 0.2 mm 6.9 ± 0.2 mm	0.65 ± 0.1 mm	2.5 ± 0.3 mm	2.3 ± 0.2 mm	4 ≤ E ≤ 5 mm (+0.50/-0.50 mm) with 0.50 mm intervals	E+1 mm (+0.50/-0.50 mm)	4P
				5.5 ≤ E ≤ 8 mm (+0.50/-0.50 mm) with 0.50 mm intervals		
				8 ≤ E ≤ 12 mm (+0.50/-0.50 mm) with 1 mm intervals	Level or E+1 mm (+0.50/-0.50 mm)	
				12 ≤ E ≤ 20 mm (+0.50/-0.50 mm) with 1 mm intervals	Level fin only (+0.50/-0.50 mm)	

*With optional black non-woven (NW) silent fin

Colours	
Multifilament pile yarn colours	
Grey RAL 7045	Black RAL 9005

Other colours available with special conditions for minimum order quantities, lead time and price may apply.

Q-LON

Brush pile

Extruded


Schlegel




G3-QF (Quadrafin)

extruded brush pile seals

Soft silicone treated multifilament yarn on an extruded base. Guaranteed on centre pile, more suitable for machine insertion. With clear central and external fins for improved weather sealing of sliding windows and doors. Optional adhesive backing.

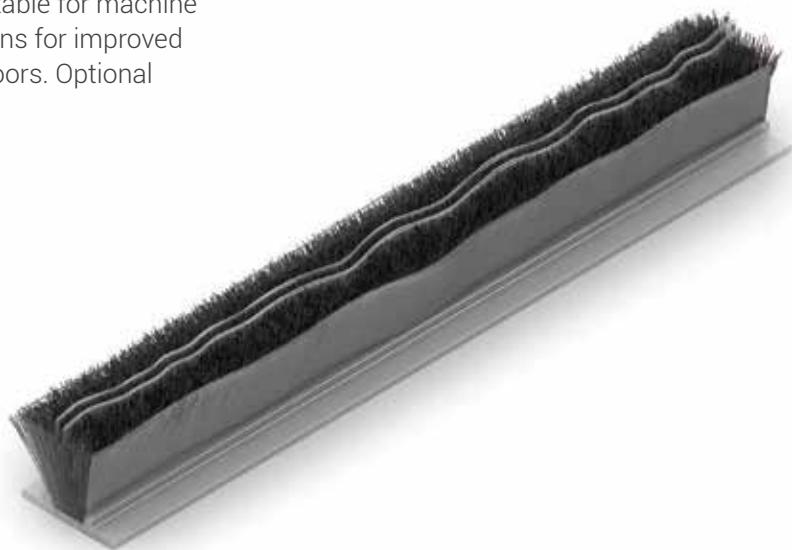

Dimensions			
	4.8	6.7	6.9
H	5.3	7.5	7.7
I	3.2	3.2	3.2
J	1.3	1.3	1.3
Minimum clearance recommended: +0.5 mm of backing width chosen			

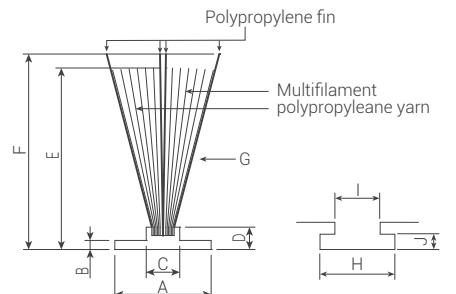

Other dimension available with special conditions for minimum order quantities, lead time, packaging and price may apply

Standard solutions						
A Backing width	B Backing thickness	C Directors width	D Directors height	E Brush height	F Central and outside Fin height* (≥ 6 mm)	G Brush density (P)
4.8 ± 0.2 mm	0.65 ± 0.1 mm	2.5 ± 0.2 mm	1.2 ± 0.2 mm	$6 \leq E \leq 10$ mm (+0.50/-0.50 mm with 0.50 mm intervals)	Level or E+1 mm (+0.50/-0.50 mm)	4P
6.7 ± 0.2 mm				$10 \leq E \leq 12$ mm (+0.50/-0.50 mm with 1 mm intervals)		

*With standard black or grey non-woven (NW) silent fin

Colours	
Multifilament pile yarn colours	
Grey RAL 7045	Black RAL 9005

Other colours available with special conditions for minimum order quantities, lead time and price may apply.



Q-LON

Brush pile

Extruded

Bi-Fin (BF)

extruded brush pile seals

Soft silicone treated multifilament pile yarn on an extruded base with upstanding directors. Guaranteed on centre pile, more suitable for machine insertion.


A clear lateral fin ensures side protection of the yarn and improves weather sealing for sliding applications. Optional adhesive backing.



Dimensions			
	4.8	6.7	6.9
H	5.3	7.5	7.7
I	3.2	3.2	3.2
J	1.3	1.3	1.3

Minimum clearance recommended: +0.5 mm of backing width chosen

Other dimension available with special conditions for minimum order quantities, lead time, packaging and price may apply

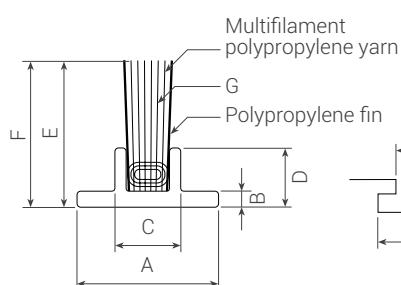

Standard solutions						
A Backing width	B Backing thickness	C Directors width	D Directors height	E Brush and central fin height	F External fin height* (≥ 5 mm)	G Brush density (P)
4.8 ± 0.2 mm	0.65 ± 0.1 mm	2.6 ± 0.3 mm	2.4 ± 0.3 mm	6 ≤ E ≤ 8 mm (+0.50/-0.50 mm) with 0.50 mm intervals	Level fin only (+0.50/-0.50 mm)	4P
6.7 ± 0.2 mm				8 ≤ E ≤ 20 mm (+0.50/-0.50 mm) with 1 mm intervals		

*With optional black non-woven (NW) silent fin

Colours	
Multifilament pile yarn colours	
Grey RAL 7045	Black RAL 9005


Other colours available with special conditions for minimum order quantities, lead time and price may apply.



Angle-Pile (AP)

extruded brush pile seals

Untreated monofilament yarn with extruded base. Available in 45° or 60° angles, Guaranteed on centre pile, more suitable for machine insertion. Predominantly applied in side guiding channels of rolling insect screens. Install single with softer standard pile, or double, to hold the screen mesh in the guides.

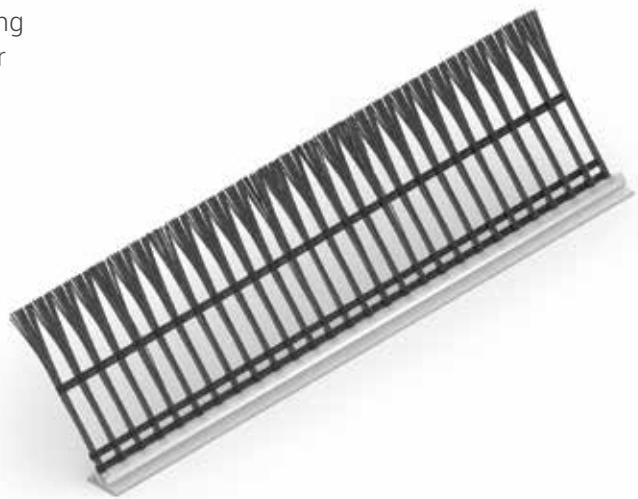

Dimensions		
	4.8	6.9
H	5.3	7.7
I	3.2	3.2
J	1.3	1.3
Minimum clearance recommended: +0.5 mm of backing width chosen		
Other dimension available with special conditions for minimum order quantities, lead time, packaging and price may apply		

Standard solutions				
A Carrier width	B Backing thickness	C Brush height	D Angles	E Brush density
4.8 ± 0.2 mm 6.9 ± 0.2 mm	0.65 ± 0.15 mm	9.0 ≤ D ≤ 12.0 + 0.5 mm with 0.50 mm intervals	45 ± 5° 60 ± 5°	24
		12.0 < C ≤ 25.0 + 0.5 mm with 1.0 mm intervals		

Colours	
Multifilament pile yarn colours	
Black RAL 9005	Grey RAL 7045



Skirting-Fringe (SF)

extruded brush pile seals

Extruded square or round base for sealing of gaps at the edges of swing doors, roller shutters and other similar narrow profile applications. Stiffer untreated 6-ply monofilament or softer silicone treated multifilament yarn. Other base shapes and dimensions are available upon request.



--	--

Other dimension available with special conditions for minimum order quantities, lead time, packaging and price may apply

Standard solutions			
A Carrier width	B Carrier height	C Brush height	D Brush density
Square 2.7 ± 0.15 mm			
Square 2.9 ± 0.15 mm			
Square 3.1 ± 0.15 mm	2.7 (+0.15 / -0.35)		
Square 3.3 ± 0.15 mm	2.9 (+0.15 / -0.35)	5.0 ≤ D ≤ 30.0 + 0.5 mm with 1.0 mm intervals	Monofilament 24
Round 2.7 ± 0.15 mm	3.1 (+0.15 / -0.35)		Multifilament 4P
Round 2.9 ± 0.15 mm	3.3 (+0.15 / -0.35)		
Round 3.1 ± 0.15 mm			
Round 3.3 ± 0.15 mm			

Colours	
Multifilament pile yarn colours	
Black RAL 9005	Grey RAL 7045

Colours	
Monofilament pile yarn colours	
Black RAL 9005	Grey RAL 7045


Other colours available with special conditions for minimum order quantities, lead time and price may apply.



Flex-Brush (FB)

coilable brush pile seals

Extruded square base for sealing of revolving doors, escalators, industrial doors and garage doors. Monofilament yarn available in polypropylene. Also available in Polyamide 6 with special conditions on minimum order quantity, lead time and price. Other carrier shapes and dimensions are available upon request.



Other dimension available with special conditions for minimum order quantities, lead time, packaging and price may apply

Standard solutions

A Carrier width	B Carrier height	C Brush height	Brush density
3 mm	3 mm	10 – 50 mm (with 1 mm intervals)	SD15
3.5 mm	3.5 mm		
4 mm	4 mm		HD15
4.5 mm	4.5 mm		

Colours

Polypropylene colours


Black RAL 9005	Grey RAL 7045
--------------------------	-------------------------



Kerf-Pile (KP)

extruded brush pile seals

Soft silicone treated multifilament pile yarn on a dedicated extruded base designed to fit a timber groove.
Easy insertion and excellent sealing.

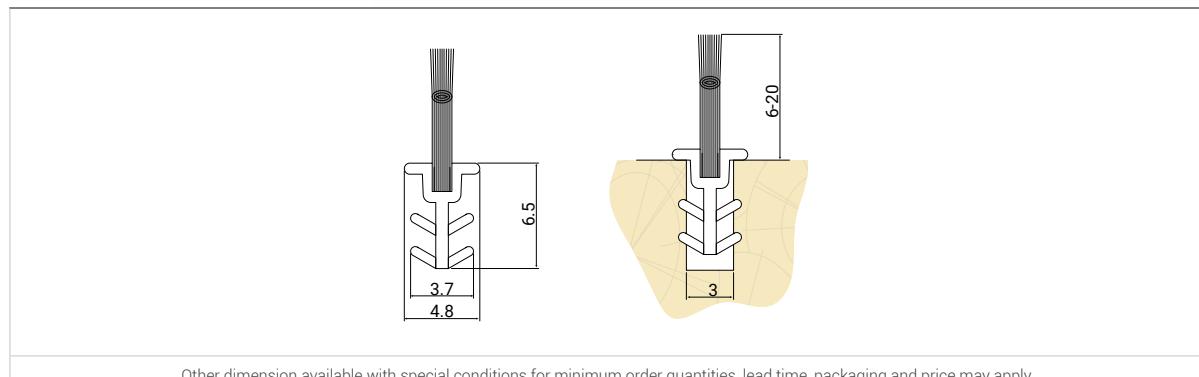

Other dimension available with special conditions for minimum order quantities, lead time, packaging and price may apply

Standard solutions			
Groove width	Min. groove depth	Brush height	Brush density
3 mm	7 mm	6.0 < H ≤ 20.0 mm (+0.50/-0.50 mm) with 1.0 mm intervals	5P


Standard Colours		Extra Colours		
Multifilament pile yarn				
Black RAL 9005	Silver Grey RAL 7045	White RAL 9003	Brown RAL 8028	Beige RAL 1011



Q-LON

Brush pile

Extruded

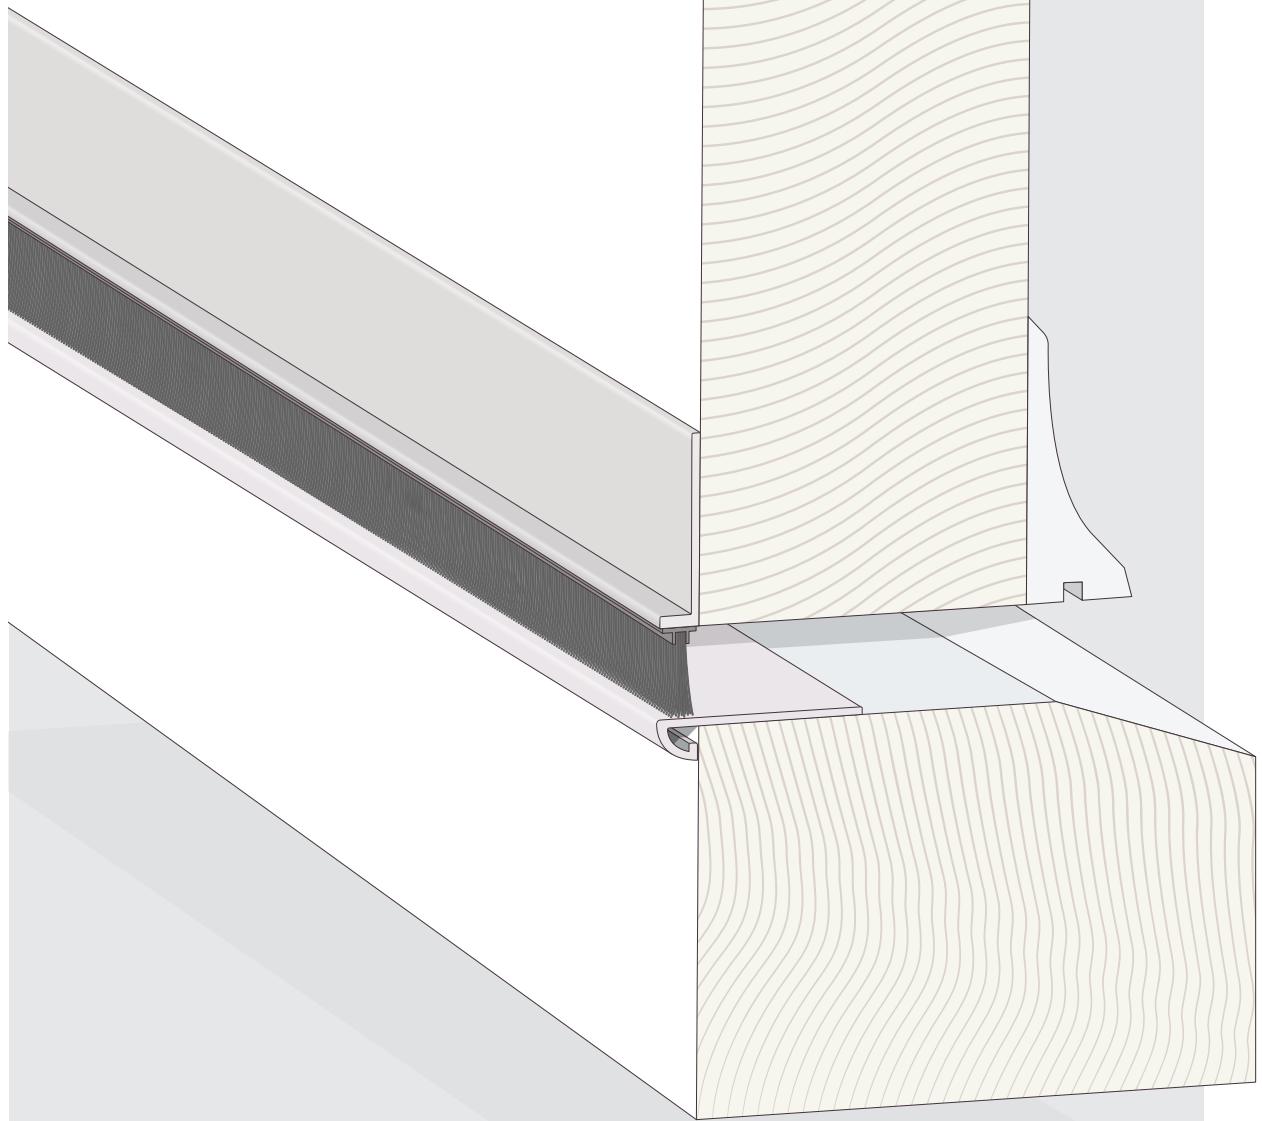

Combination brush pile seals

- Rigid ABS, PP or PVC extrusion for universal surface or kerf-slot fitting
- Fitted with brush pile according to specification
- Alternatively extruded profile for retro-fit with brush pile in coils



For universal surface fitting

Poly-Bond on extruded PVC, PP or ABS carrier

PB 1126	<p>Seal gap: 8.0 - 15.0 Pack size: 50 m x 2</p>
Doors	

PB 1127	<p>Seal gap: 11.0 - 23.0 Pack size: 50 m x 4 50 m x 3 45 m x 3</p>
Doors	

For kerf-slot fitting

Poly-Bond on extruded PVC, PP or ABS carrier

PB 0908	<p>Groove width: 3.0 Min. groove depth: 10.0 Seal gap: 2.0 - 13.0 Pack size: 2.1 m x 100</p>
Doors	





PB 1001	<p>Groove width: 3.0 Min. groove depth: 6.0 Rebate: 9.5 Seal gap: 4.0 - 15.0 Pack size: 150 m x 1</p>
Timber sliding windows	

PB 1002	<p>Groove width: 3.0 Min. groove depth: 6.0 Rebate: 11.8 Seal gap: 4.0 - 15.0 Pack size: 150 m x 1</p>
Timber sliding windows	







PB 1003	<p>Groove width: 3.0 Min. groove depth: 6.0 Rebate: 7.5 Seal gap: 4.0 - 15.0 Pack size: 100 m x 1</p>
Timber sliding windows	

PW 1018 FLEX	<p>Groove width: 3.0 Min. groove depth: 7.0 Seal gap: 4.0 - 15.0 Pack size: 200 m x 1 2.1 m x 300</p>
Timber sliding doors	




PB 1021	
Groove width: 3.0 nom. (B1); 2.5 min. to 3.8 max. (B2)	
Min. groove depth: 7.0	
Rebate: 7.5	
Seal gap: 4.0 - 15.0	
Pack size: 400 m x 1	
Aluminium sliding doors	
PB 1372	
Groove width: 3.0	
Min. groove depth: 7.0	
Pack size: 650 m x 1	
RX	
PB 1451	
Groove width: 3.0	
Min. groove depth: 7.0	
Pack size: 650 m x 1	
LX	
PB 1466	
Groove width: 3.0	
Min. groove depth: 7.0	
Pack size: 650 m x 1	
Dust filter	

Carriers for brush pile seals

LV 0921	27256	
Groove width: 10.0		
Min. groove depth: 4.0		
Pack size: 50 m x 100		
C-channel 10 x 4 with 6.7 brush insert		
LV 3015	27797	
Pack size: 2.6 m x 100		
L-profile carrier 7 x 26 with 4.8 brush insert		
LV 3016	27809	
Pack size: 1.0 m x 100		
L-profile carrier 10 x 26 with 6.7 brush insert		
LV 5032	27853	
Groove width: 4.0		
Min. groove depth: 10.0		
Pack size: 50 m x 9		
Kerf-slot carrier 7 x 9 with 4.8 brush insert		
LV 5438	27900	
Groove width: 3.0		
Min. groove depth: 8.0		
Pack size: 2.2 m x 200		
Kerf-slot carrier 7 x 7 with 4.8 brush insert		
LV 5594	27923	
Groove width: 7.1		
Min. groove depth: 3.5		
Pack size: 2.1 m x 100		
Adhesive C-channel with 4.8 brush insert		

EASE OF INSERTION

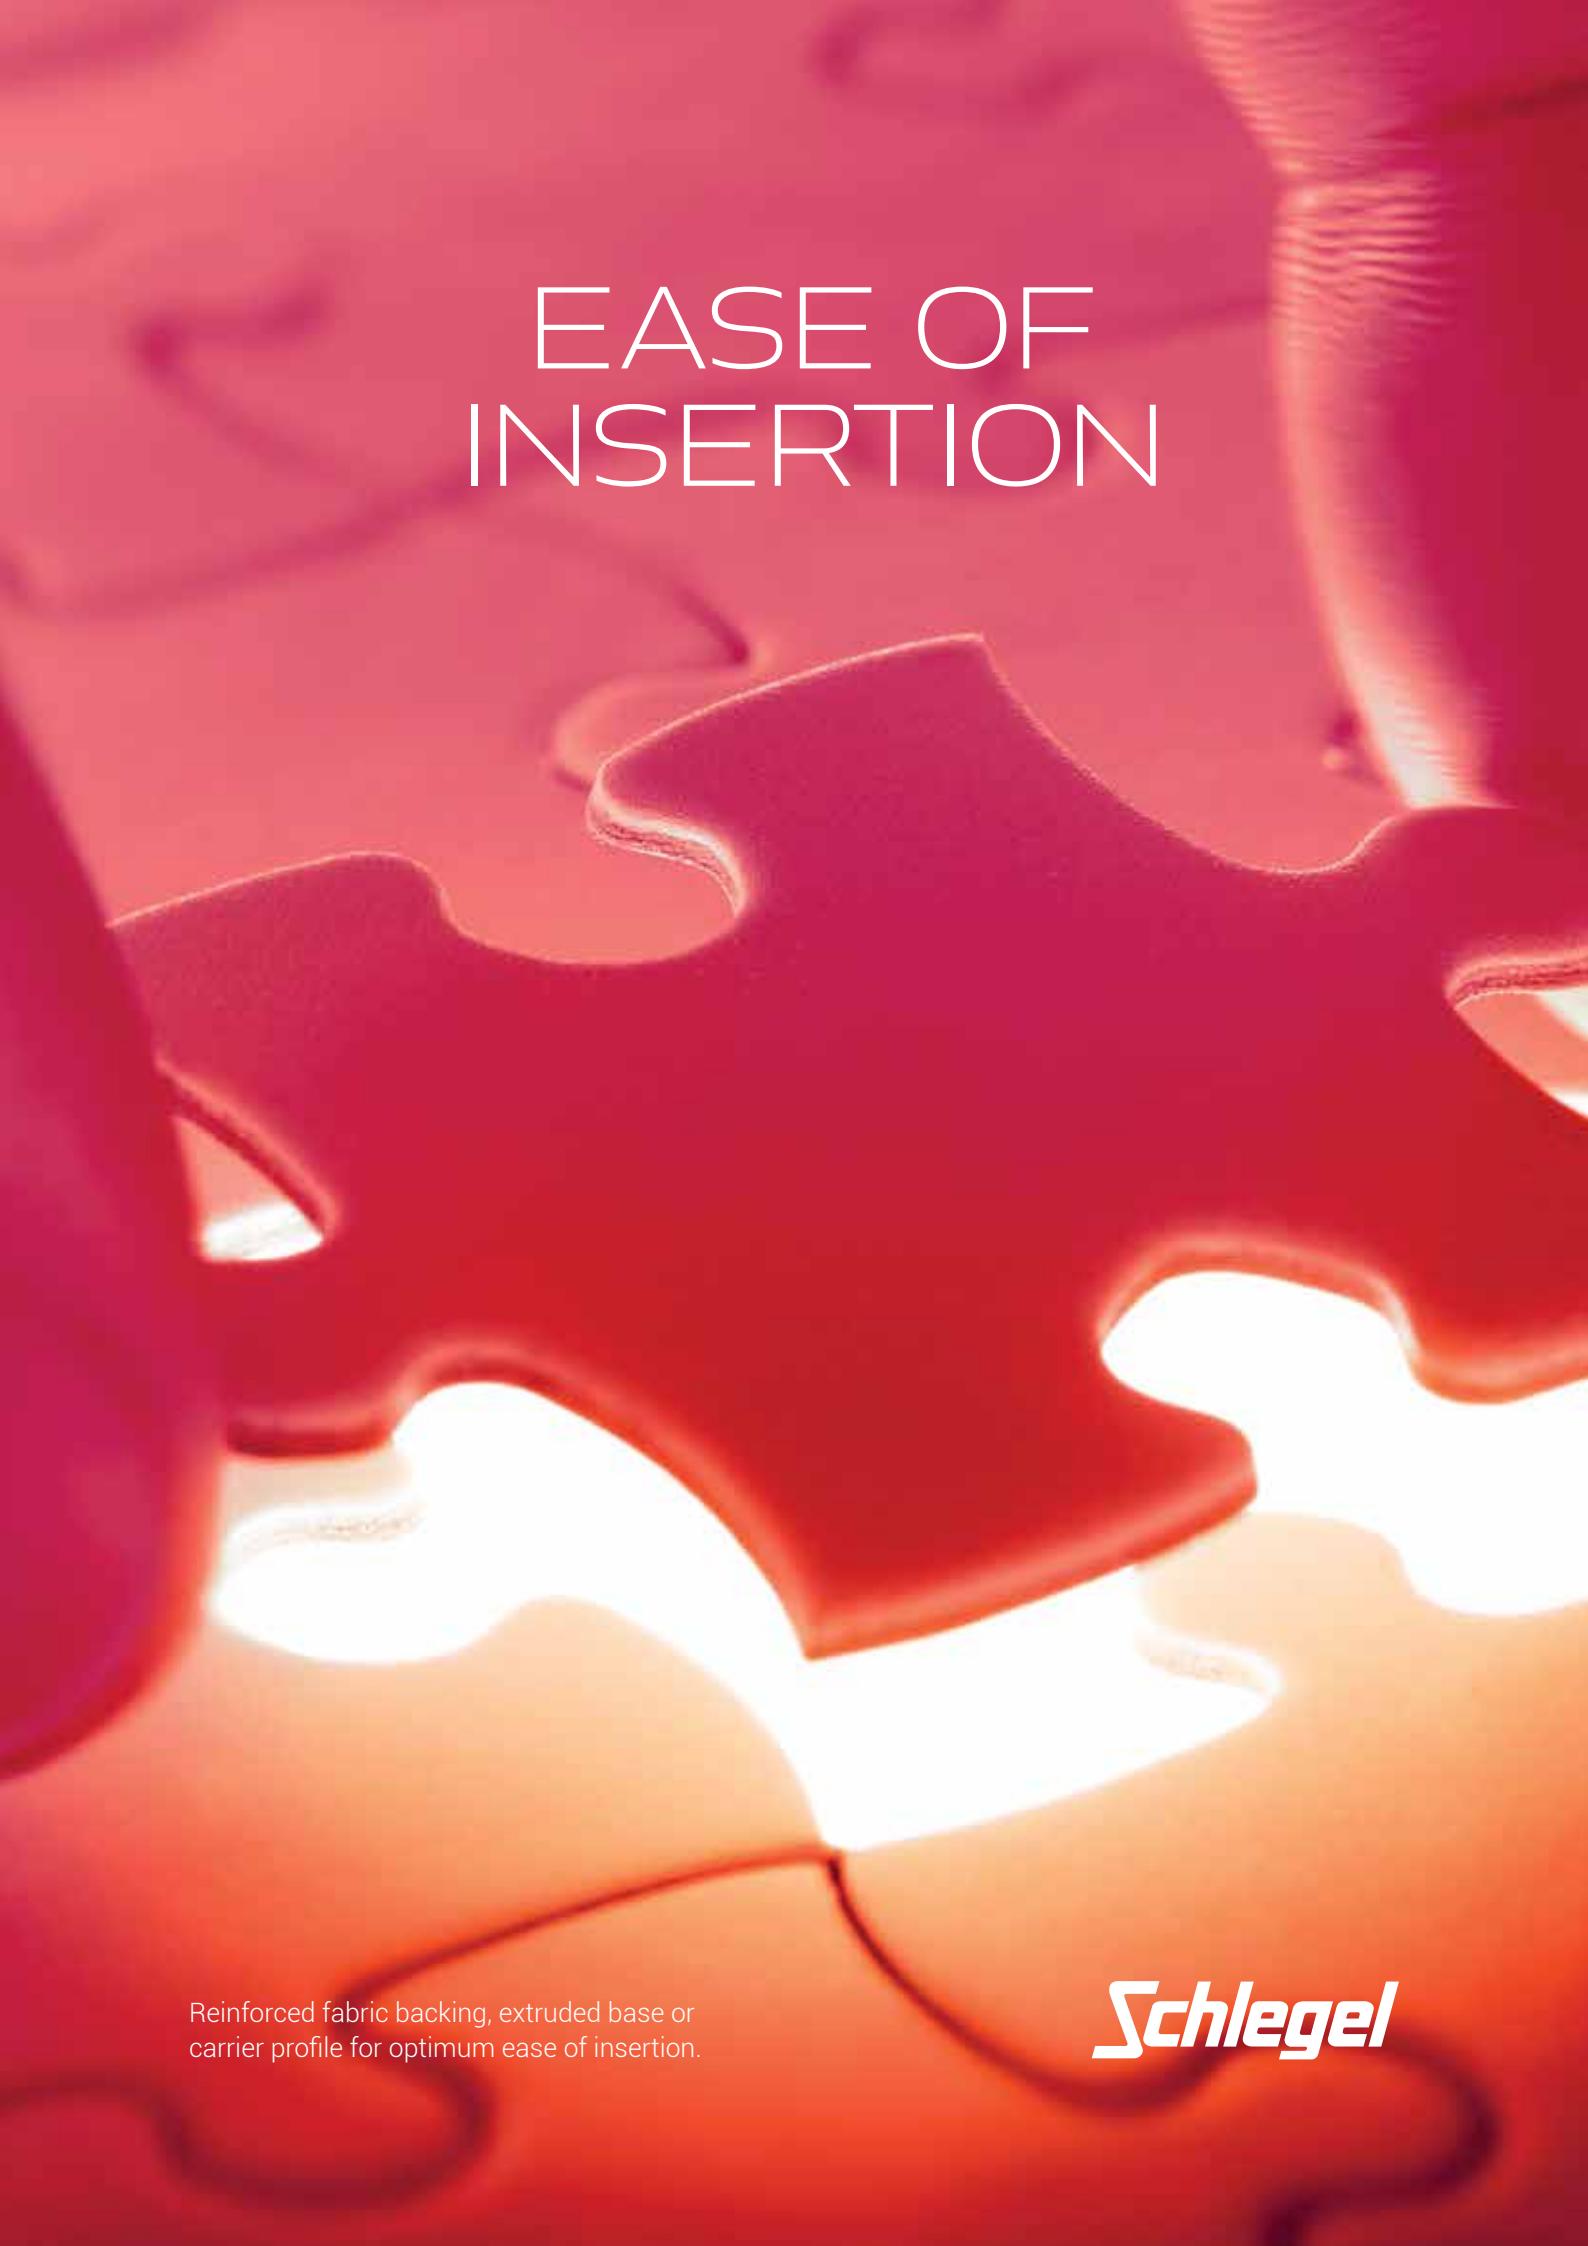


Reinforced fabric backing, extruded base or carrier profile for optimum ease of insertion.

Schlegel

Extruded seals

For timber, aluminium and PVC applications

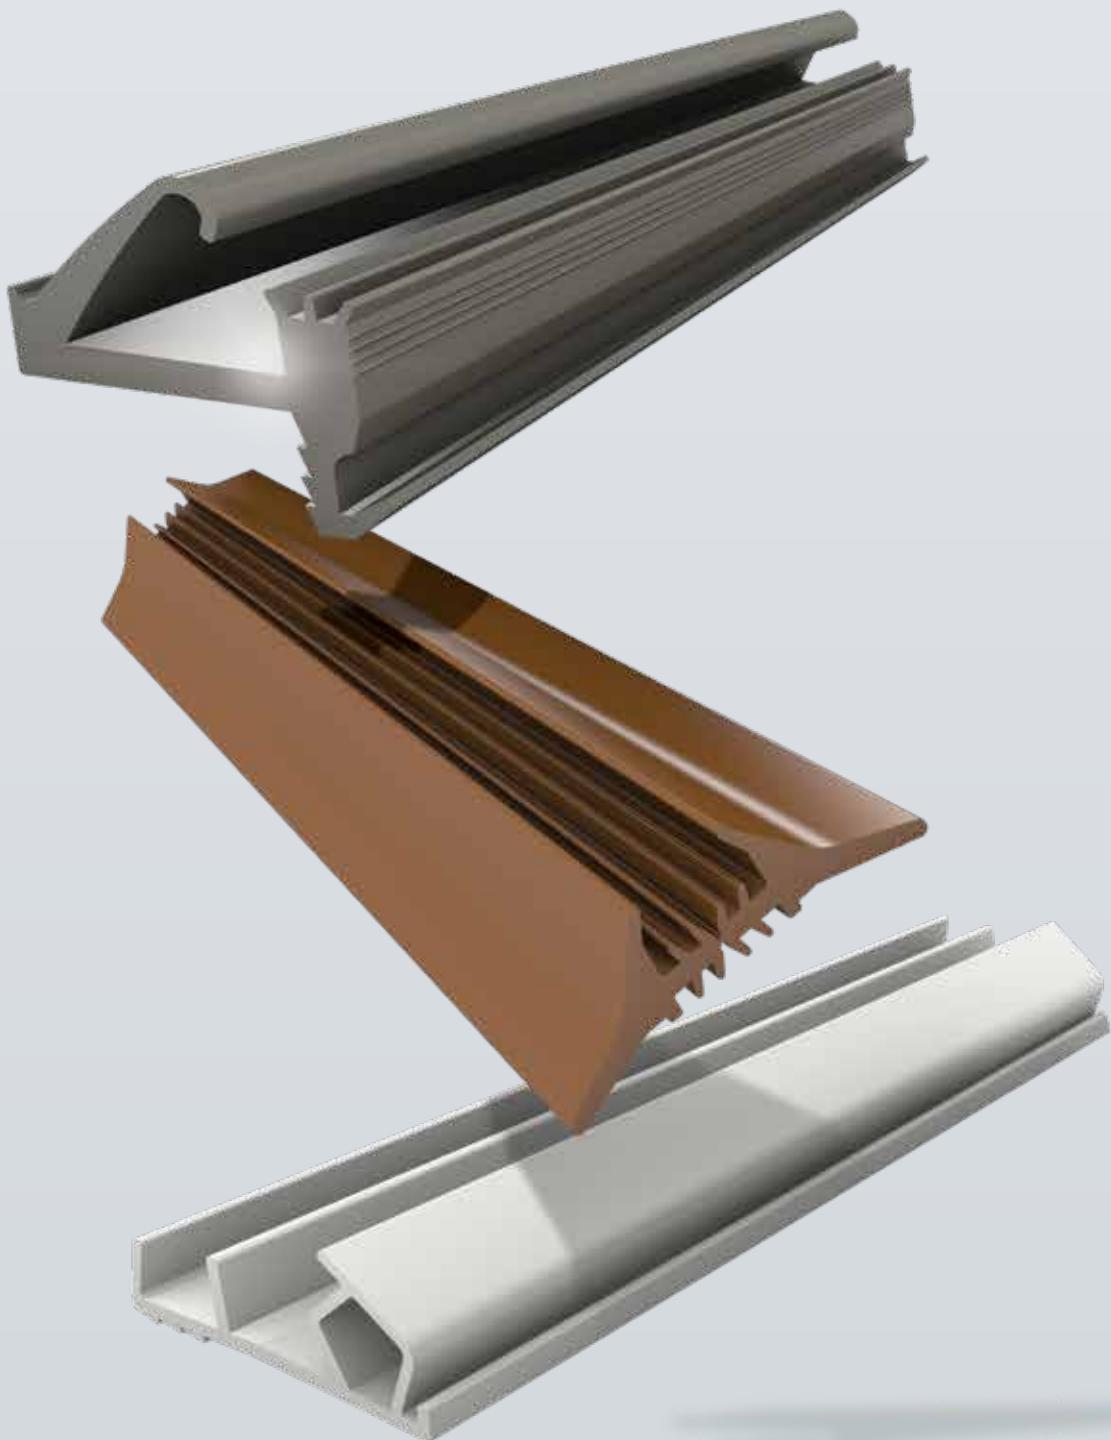

Index

Materials and colours	82
Classifications	85
Technical specifications	
Lozaron. Extruded profiles for timber doors and windows	86
Lozaron. Extruded profiles for aluminium doors and windows	88
Shutters and screens	92



Materials and colours

Schlegel extruded seals are made from various extruded materials and can be combined with foam seals.

Q-LON

Brush pile

Extruded



Available in the following colours:

Standard Colours

- WHITE / RAL 9003 / **Code 287**
- BLACK / RAL 9005 / **Code 288**

Extra Colours

- GREY / RAL 7040 / **Code 224**
- GRAPHITE GREY / RAL 7024 / **Code 273**
- LIGHT GREY / RAL 7035 / **Code 275**
- DUSTY GREY / RAL 7037 / **Code 276**
- GREY / RAL 7045 / **Code 277**
- BROWN / RAL 8019 / **Code 285**

For the standard colours for each item, please refer to the separately available customer drawings on our website.

Lozaron (LF) (LP) (LT) (LV)

Lozaron seals consist of a range of TPE, foamed TPE, polypropylene, EPDM and PVC profiles.

- **Lozaron TPE extrusions with flexible microcell foam (LF)**
- **Lozaron TPE extruded profiles without foam (LT)**
- **Polypropylene (LP) and PVC (LV) extrusions**

In our range of extruded seals, a variety of materials and manufacturing processes are combined to achieve the optimal combination of product characteristics.

Lozaron extrusions are made of different plastic compounds and can be combined with the Poly-Bond brush pile and Q-LON foam technologies as outlined.


WIDE RANGE OF COLOURS



Schlegel extruded seals come
in a huge range of colours.

Schlegel

WIDE RANGE OF MATERIALS

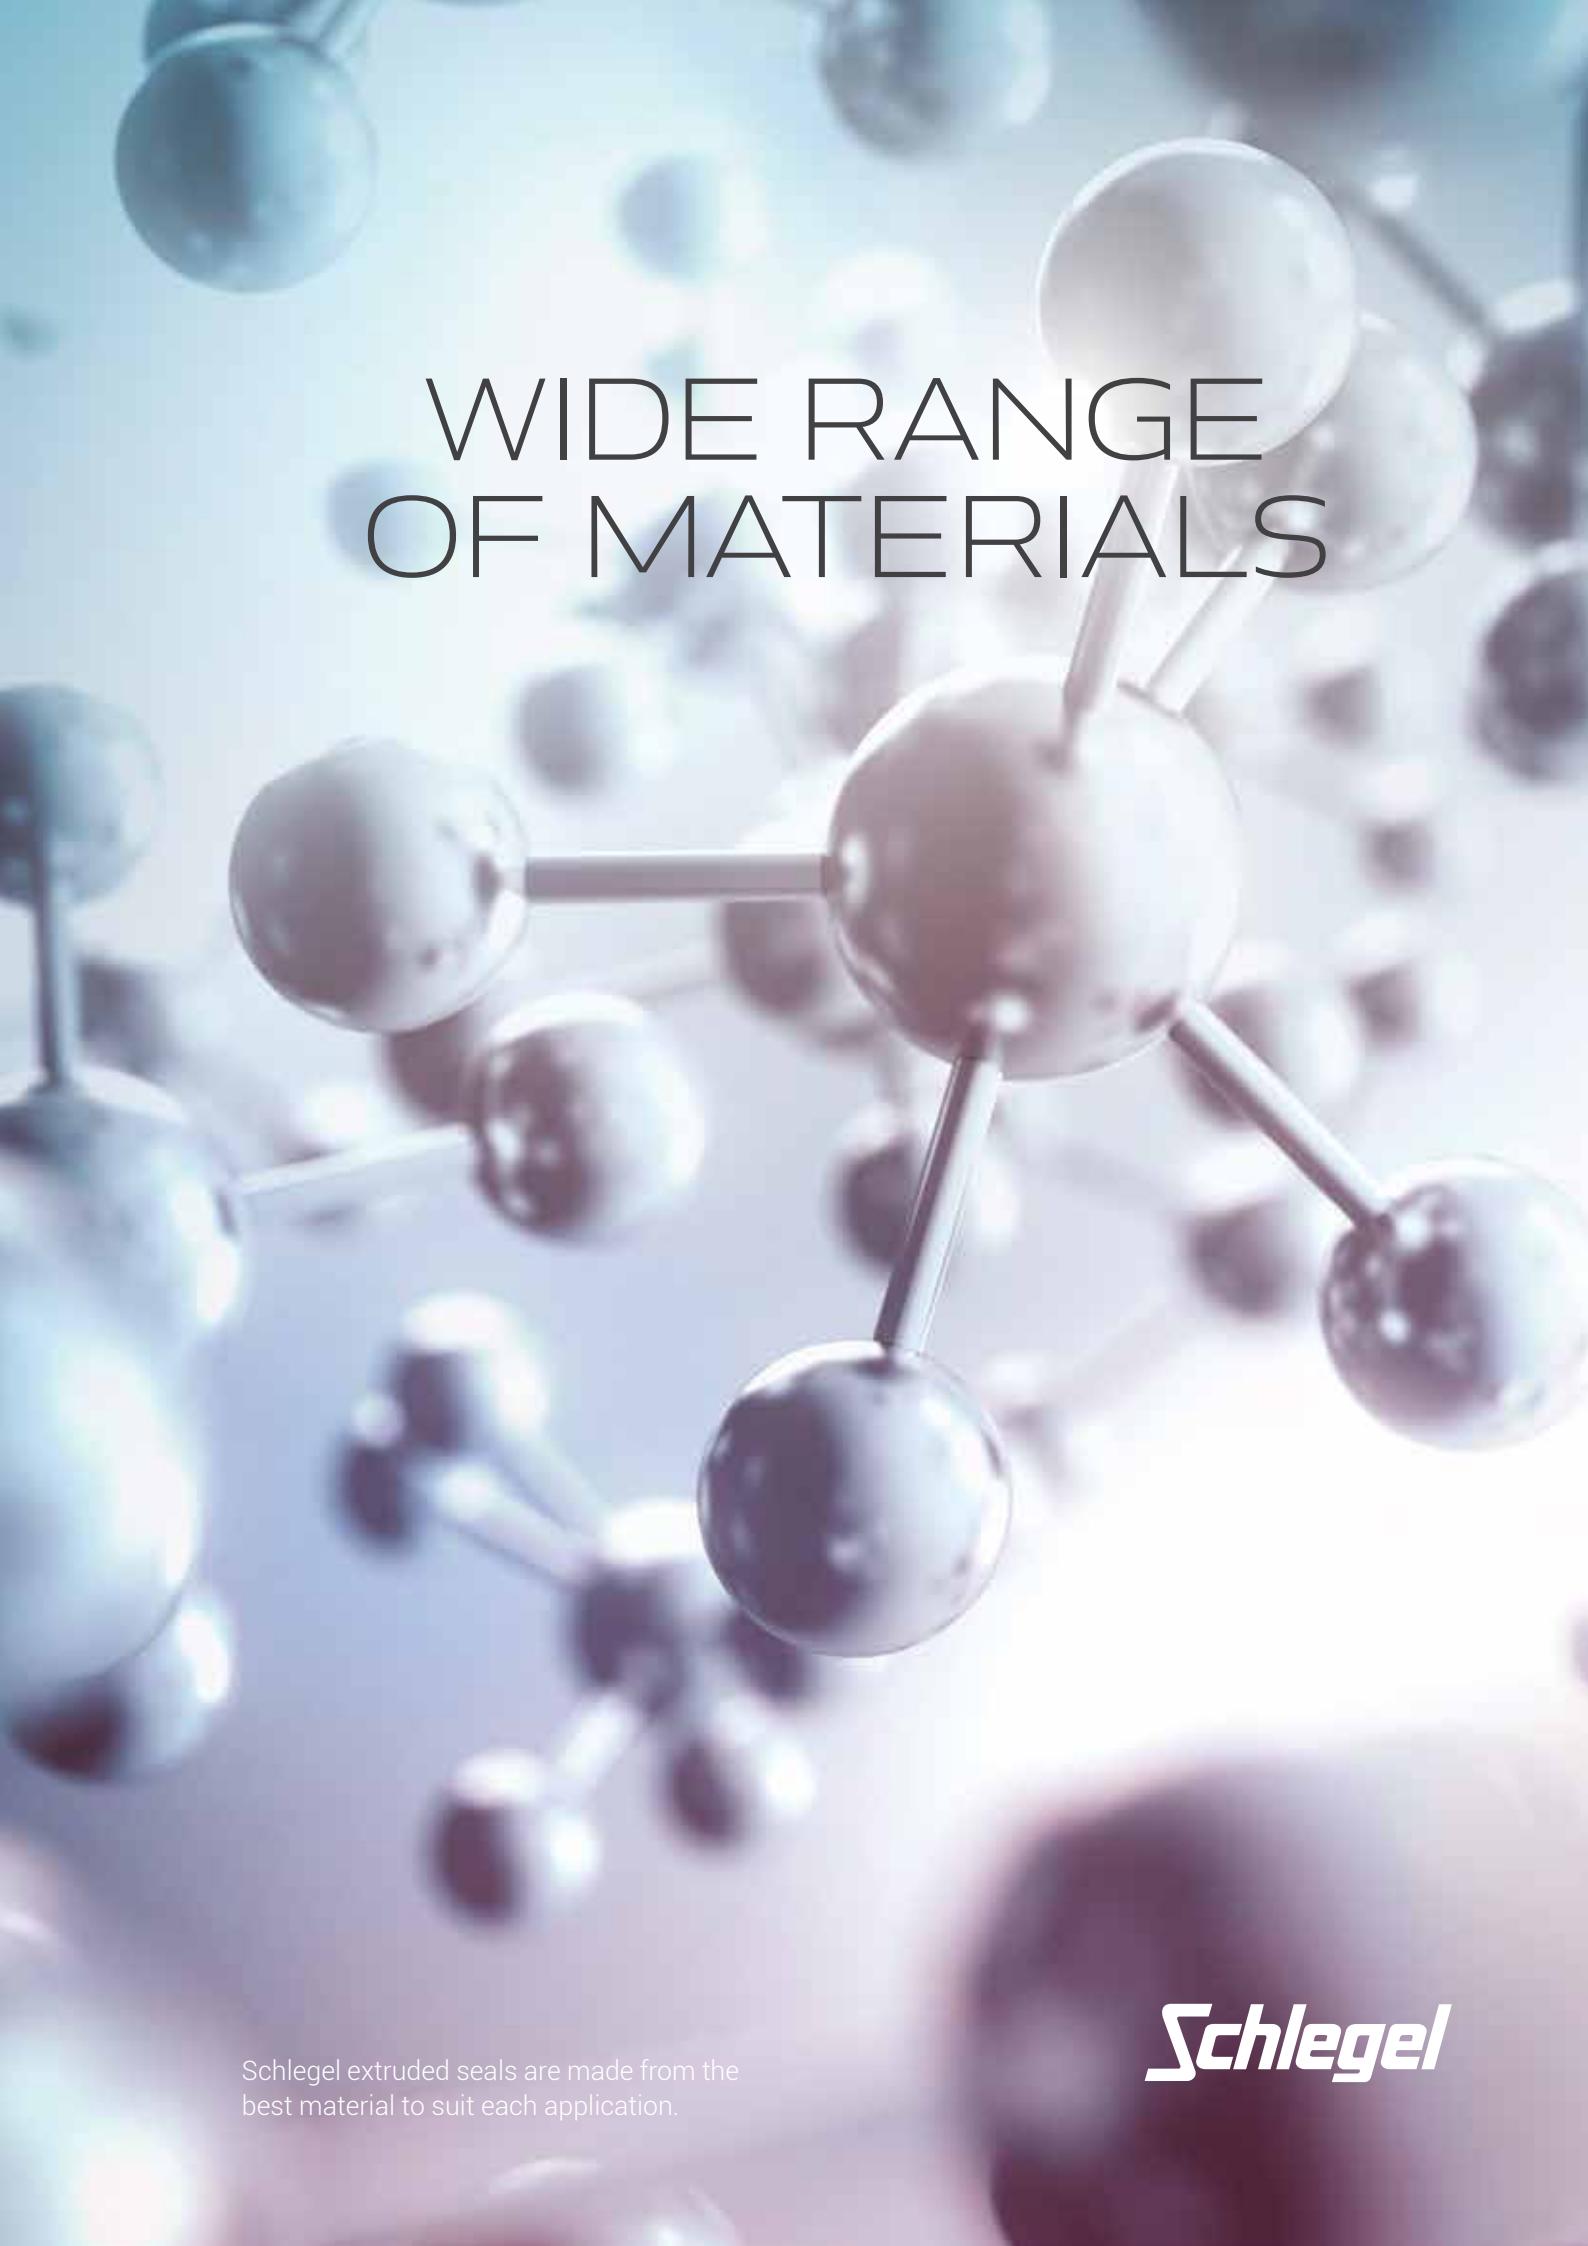

Schlegel extruded seals are made from the best material to suit each application.

Schlegel

Classifications

Weatherseals compliant with EN 12365 2003

Under EN 12365 2003 there is a prescribed classification system that enables window, door, shutter and curtain walling manufacturers or installers to ensure that they are using the component that best meets their requirements.

A six-digit system is used

1	2	3	4	5	6
Category of use	Working range	Linear compression force	Working temperature range	Deflection recovery	Recovery after ageing
W = Weatherstrip G = Gasket	9 grades showing the working range of the seal; 9 indicates the greatest distance	9 grades showing the linear compression force; 9 indicates the greatest force	6 grades showing the operating temperature range, each with different maximum and minimum temperatures	8 grades showing deflection recovery; grade 0 indicates no requirement and grade 7 shows the greatest recovery	8 grades showing recovery after ageing; grade 0 indicates no requirement and grade 7 shows the greatest recovery


Grades

1: ≤ 1 mm 2: >1 mm ≤ 2 mm 3: >2 mm ≤ 4 mm 4: >4 mm ≤ 6 mm 5: >6 mm ≤ 8 mm 6: >8 mm ≤ 10 mm 7: >10 mm ≤ 15 mm 8: >15 mm ≤ 30 mm 9: >30 mm	1: ≤ 10 N/m 2: >10 N/m ≤ 20 N/m 3: >20 N/m ≤ 50 N/m 4: >50 N/m ≤ 100 N/m 5: >100 N/m ≤ 200 N/m 6: >200 N/m ≤ 500 N/m 7: >500 N/m ≤ 700 N/m 8: >700 N/m ≤ 1000 N/m 9: >1000 N/m	1: 0°C to +45°C 2: -10°C to +55°C 3: -20°C to +85°C 4: -25°C to +100°C 5: -40°C to +70°C 6: 0°C to +200°C	0: No requirements 1: >30% to 40% 2: >40% to 50% 3: >50% to 60% 4: >60% to 70% 5: >70% to 80% 6: >80% to 90% 7: >90%	0: No requirements 1: >30% to 40% 2: >40% to 50% 3: >50% to 60% 4: >60% to 70% 5: >70% to 80% 6: >80% to 90% 7: >90%
--	--	--	---	---

A typical classification looks like this

W	3	4	2	4	3
---	---	---	---	---	---

Code	EN 12365
LT 1305	W33221
LT 1432	W34243
LT 1509	W24521
LT 1515	W15232

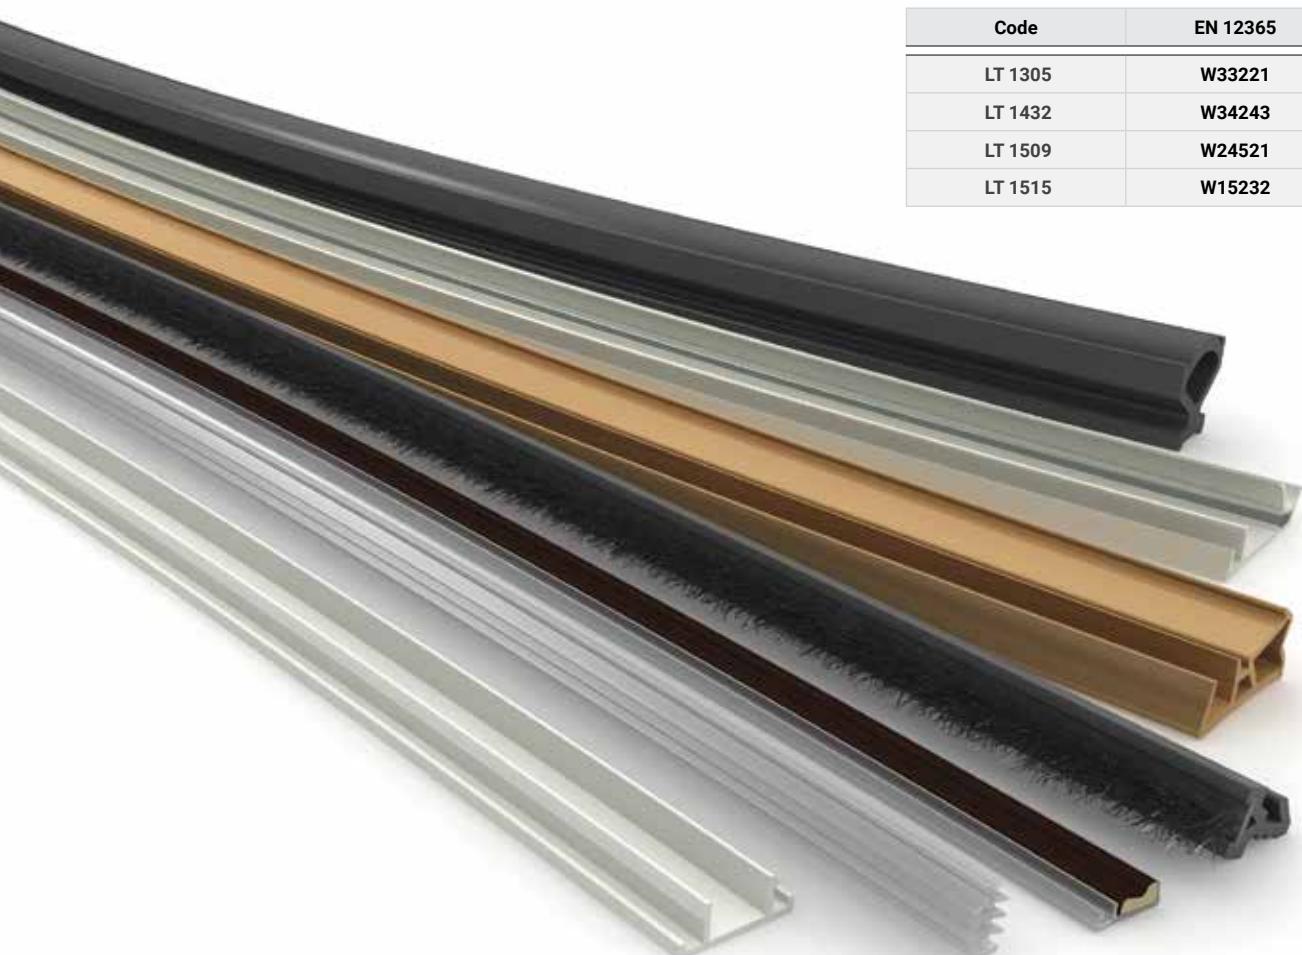




Q-LON

Brush pile

Extruded

LE	Lozaron EPDM seals
LT	Lozaron foamed TPE seals
LP	Lozaron PP seals
LV	Lozaron PVC seals

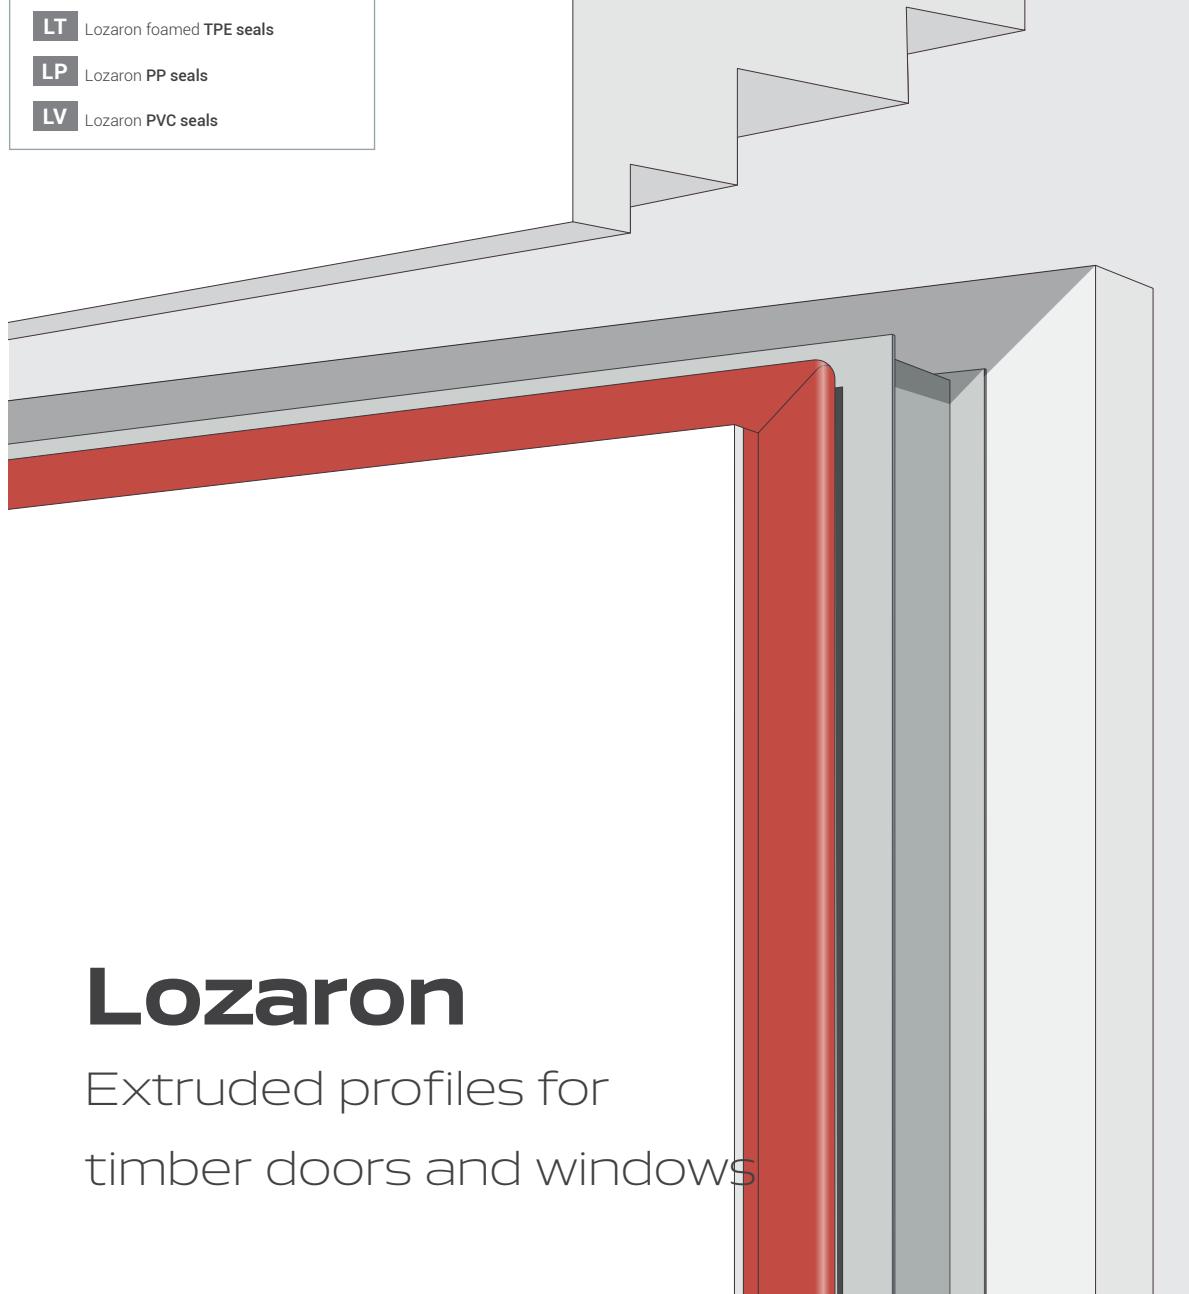

Lozaron

Extruded profiles for
timber doors and windows

LF 1105	23010
Groove width: 1.5 - 2.2	
Min. groove depth: 11.5	
Pack size: 400 m x 2	
Cover profile for dry glazing	

LP 1034	24010
Groove width: 0.7 - 0.8	
Pack size: 400 m x 1	
Cover profile for dry glazing	

LP 1057	24091		LT 1489	26891	
Casement seal			Double window seal	C S	
LP 1101	24171		LV 0959	27437	
Centre seal	C		Door threshold profile	F S	
LT 1362	26020		LV 1102	27370	
Profile for doors and windows	F		Double window seal	C F	
LT 1430	26350		LV 1140	27003	
Door sealing profile	F S		Door sealing profile	F S	
W34242			LV 1305	27555	
Sealing profile	C		Window sealing profile	F	
W34243			W33221		
LT 1432	26571		LV 1306	2756601	
Sealing profile	C		Window sealing profile	F	
W34243			W33221		
LT 1481	26673				
Sealing profile					


F Suitable for Frame Seal **O** Suitable for Overlap Seal **S** Suitable for Sash Seal **C** Suitable for Centre Seal



Q-LON

Brush pile

Extruded

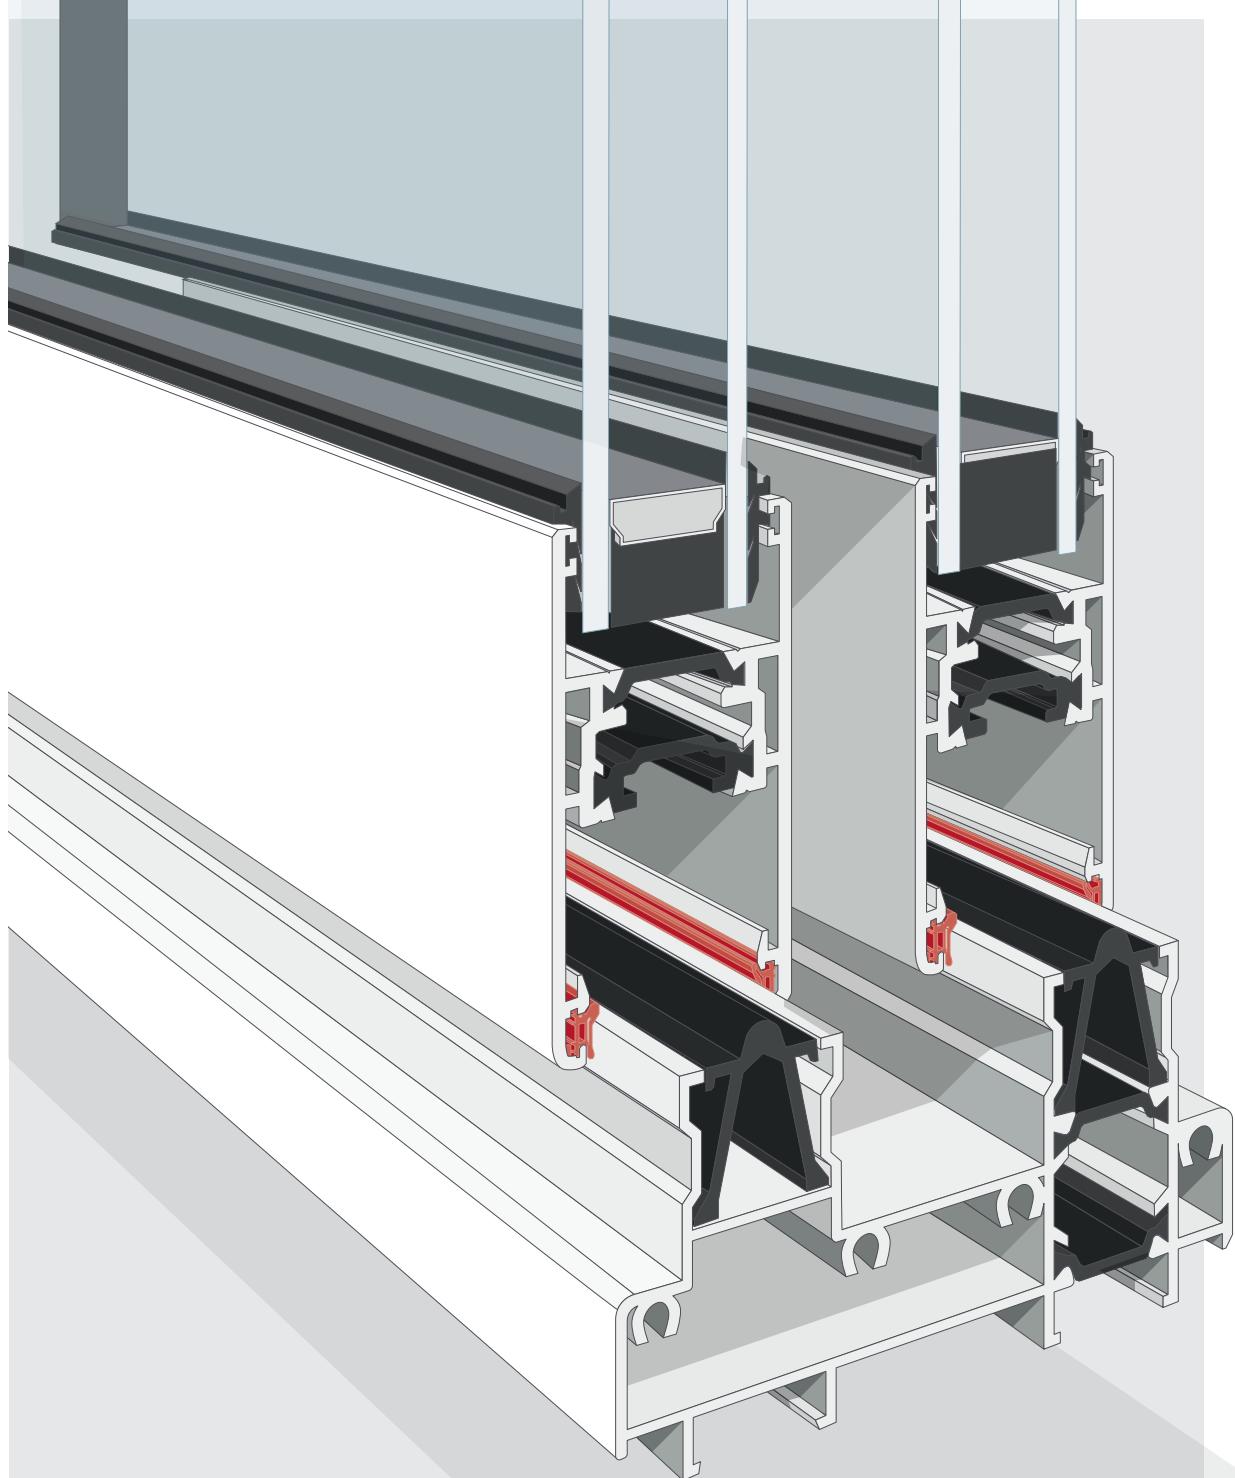

Lozaron Aluminium

Applications on aluminium
doors and windows





Q-LON

Brush pile

Extruded

For aluminium sliding doors

LT 1509	26990
Throat width: 4.0 - 4.5	
Groove width: 5.0	
Seal gap: 3.0	
Pack size: 250 m x 1	
Sliding seal	
W24521	
LT 1515	26993
Throat width: 3.2	
Groove width: 5.4	
Seal gap: 2.6 - 2.9	
Pack size: 250 m x 1	
Sliding seal	
W15232	






For aluminium dry glazing

LE 611 FV2	2230501	
A - Seal gap: 2.0		
Pack size: 500 m x 1		
Glazing bead seal		
LE 727 FV3	2231001	
A - Seal gap: 3.0		
Pack size: 400 m x 1		
Glazing bead seal		
LE 768 FV4	2231501	
A - Seal gap: 4.0		
Pack size: 250 m x 1		
Glazing bead seal		
LE 1009 FV5	2232001	
A - Seal gap: 5.0		
Pack size: 150 m x 1		
Glazing bead seal		
LE 1162 FV6	2232501	
A - Seal gap: 6.0		
Pack size: 150 m x 1		
Glazing bead seal		
LE 1232 FV7	2233001	
A - Seal gap: 7.0		
Pack size: 100 m x 1		
Glazing bead seal		

LE 1325 FV8 2233501


A - Seal gap: 8.0
Pack size: 100 m x 1



Glazing bead seal


LE 1670 FV10 22340

A - Seal gap: 10.0
Pack size: 100 m x 1



Glazing bead seal

IN ALL SHAPES

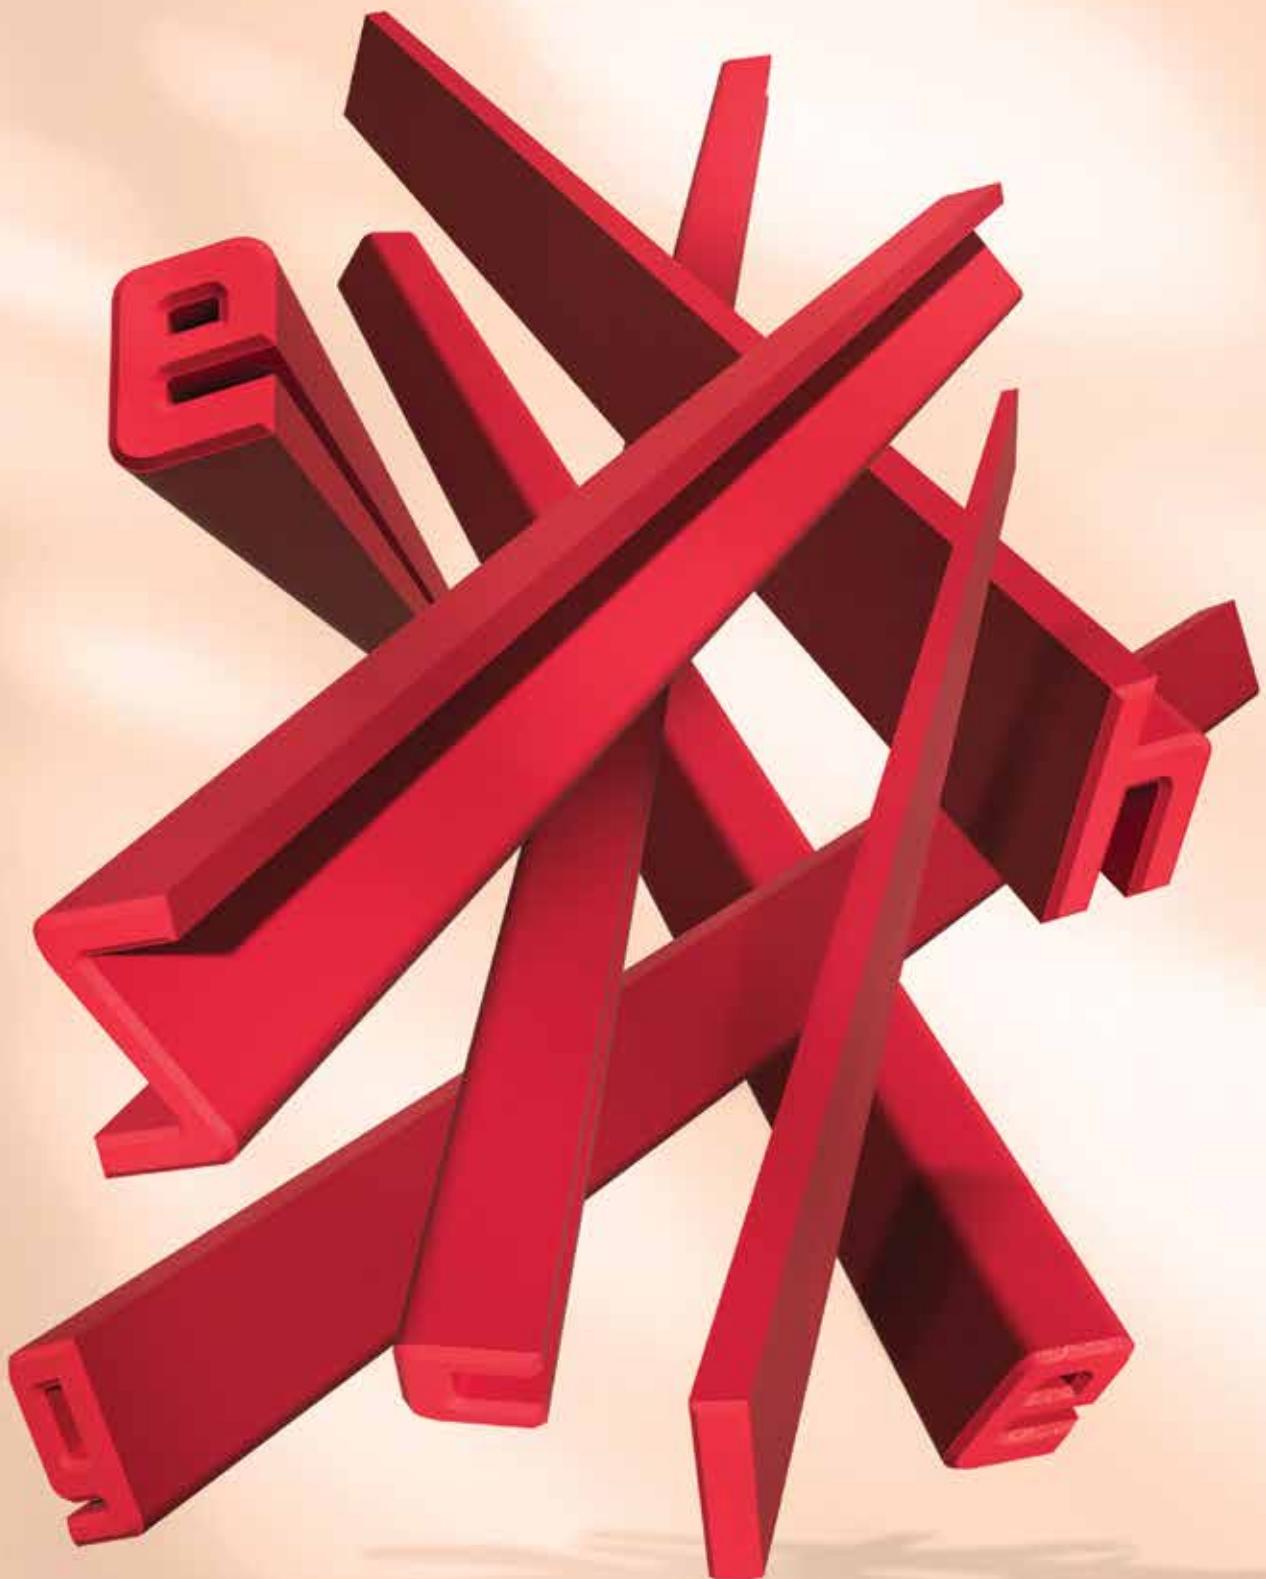

Schlegel extruded seals can be configured with geometries ranging from the simplest to the most specific shapes.

Schlegel



Q-LON

Brush pile

Extruded

Shutters and screens



Q-LON

Brush pile

Extruded

For roller shutters, screens and window covering products

LP 1040	24030
Pack size: 500 m x 1	

LP 1077	26015
Groove width: 2.5 - 6.0 Min. groove depth: 1.2 Seal gap: 4.5 - 6.0 Pack size: 400 m x 1	

LP 1088	24151
Groove width: 4.0 - 8.0 Min. groove depth: 1.2 Pack size: 400 m x 1	

LP 1102	27370
Pack size: 400 m x 2	

LV 1194	27364
Pack size: 2.5 m x 50	

LV 1215	27483
Pack size: 2.5 m x 50	

LV 1417	27599
Groove width: 3.0 - 8.0 Min. groove depth: 1.2 Pack size: 350 m x 1	

LV ZIP	
Pack size: 6.0 m x 40	

DIFFERENT DENSITIES



Schlegel extruded seals come in three different densities and materials, which can be mixed and matched for optimal performance.

Schlegel

Colours Appendix

Q-LON: polyurethane foam seals

Colour	RAL Code	Schlegel Code
Standard Colours		
White	9003	222
Silver	7001	212
Brown	8019	220
Black	9005	223

Colour	RAL Code	Schlegel Code
Extra Colours		
Beige	1001	211
Light Oak	8003	217
Fawn Brown	8007	218
Pure White	9010	221
Light Grey	7035	215
Pebble Grey	7032	213
Graphite Grey	7024	214

Brush pile seals and sealing profiles

Colour	RAL Code	Schlegel Code
Standard Colours Monofilament		
Grey	7045	277
Black	9005	288

Colour	RAL Code	Schlegel Code
Standard Colours Multifilament		
Grey	7045	277
Black	9005	288
Extra Colours Multifilament		
Brown	8028	264
Beige	1011	241
White	9003	287

Extruded seals

Colour	RAL Code	Schlegel Code
Standard Colours		
White	9003	287
Black	9005	288

Colour	RAL Code	Schlegel Code
Extra Colours		
Grey	7040	224
Graphite Grey	7024	273
Light Grey	7035	275
Dust Grey	7037	276
Grey	7045	277
Brown	8019	285



Schlegel

High performance sealing solutions



GIESSE

Innovative engineered hardware



REGUITTI

Italian design handles



JATEC

Timeless exclusive handles



Quanex

Schlegel Ltd Coatham Avenue, Aycliffe Industrial Estate, Newton Aycliffe, County Durham DL5 6DB – United Kingdom
+44 1325 310 151 | info.aycliffe@quanex.com | www.schlegel.com



U1073101
04/2025