

# CHIC

STYLE MUST BE FELT, NOT SEEN

 **GIESSE**

2016

# THE JOURNEY BEGINS


**CONCEALED.  
HARDWARE.  
INNOVATIVE.  
COMPONENTS.**

Aluminium casements embody modernity and innovation, which have always been the signature characteristics of the Giesse ethos.

The properties of aluminium made it a natural medium for developing casements with minimalist profiles and higher glazing ratio for a more essential and brighter look. And with accessories hidden from view.

Mainly thanks to Giesse, *concealed* accessories are now commonplace. But it was a different story just a few years ago.





**Mirko Scheda**

Product Manager


*The C.H.I.C. project was a challenging one on a number of levels. The technical solutions that we adopted needed to be innovative—and therefore patented—to make an impact on the market. They also had to make use of new materials not commonly used in the aluminium casement sector. Finally, the most difficult challenge was to miniaturise the components and conceal them inside the profile.*

*It hasn't been an easy road. We carried out hundreds of tests and, as often happens, we faced various challenges that enabled us to understand and improve where necessary. The results are now there for all to see. Even more so today, as the range includes an increasing number of new increasingly high-performance products.*



# COMPLETE RANGE

It is a common misconception that style and performance cannot go hand-in-glove. With the C.H.I.C. range, however, reducing the sash and frame profile brings a number of technical and practical benefits.



## Tilt-and-turn window

- Load capacity up to 150 kg
- 180° opening
- 3D adjustment
- Micro-ventilation as standard
- Same product for Standard and Logica
- Also available for balcony doors
- Can be combined with Giesse SKG burglar-proof hardware
- Highest corrosion resistance



## Side-hung

- Load capacity up to 150 kg
- 180° opening
- 3D adjustment
- Minimum width 160 mm, also ideal for ventilation sashes
- Also available for security sashes
- Can be combined with Giesse SKG burglar-proof hardware
- Highest corrosion resistance




## Andrea Coralli

Product Manager

*In 2022, the C.H.I.C. range has been enhanced with the addition of the C.H.I.C. Door EG and RG, the first concealed hinges specifically designed for Euro Groove and R Groove door systems.*

*By adding C.H.I.C. Door ALU16 for groove 16 profiles in 2025, Giesse now offers concealed hinges suitable for the most common opening styles and profiles on the market. These products deliver all the hallmark benefits of the C.H.I.C. concept: exceptional quality, wide opening angles, robust load capacity, and straightforward installation.*



### Bottom-hung window

- Load capacity up to 250 kg
- Max sash width 2.5 m
- Height and compression adjustments
- Sash rest elements to relieve weight with closed sash
- 180° opening for easier installation
- Highest corrosion resistance



### Door

- Load capacity up to 150 kg
- 105° opening
- Height and compression adjustments
- Silver and Black finishes

A photograph of a window with a view of the ocean under a cloudy sky. The window frame is white, and a silver Giesse window handle is visible in the foreground. The text 'SHIELD MAX 5' is overlaid on the image, with the '5' inside a shield icon.

# SHIELD MAX 5

## Oltre il Grado 5

Giesse introduces ShieldMax5, blending innovation, durability, and protection for the harshest environments: from salty environments and humid climates to urban pollution, the ShieldMax5 treatment is able to withstand the elements.

**Tested and certified to Grade 5, the highest level under European Standard EN 1670, ShieldMax5** resists over 480 hours of salt spray, a benchmark of unmatched durability.

# CERTIFIED QUALITY AND SUSTAINABILITY

## ▪ Patented

C.H.I.C. hinges are patented solutions.  
All design, development and production stages are Made in Italy.

## ▪ CE Marking

C.H.I.C. Door hinges bear the CE marking in accordance with standard EN 1935:2004 (class 12), which involves testing with 200,000 opening and closing cycles.

## ▪ RAL certification

C.H.I.C. products for tilt-and-turn windows have been awarded the RAL-GZ 607/3 quality certification by PIV, Velbert (Germany).

## ▪ EPD - Environmental Product Declaration

C.H.I.C. products for Euro Groove tilt-and-turn windows and doors have been awarded the EPD certification. Life Cycle Assessment completed in accordance with standards ISO 14040, ISO 14044, EN ISO 14025 and EN 15804.



**Giovanni Liconti**

Sustainability Manager

*Our sustainability roadmap involves exploiting certifications from independent bodies as a tool for a transparent and quantifiable assessment of environmental performance.*

*Accurately measuring the impact of a product throughout its life cycle means the sustainability of different products can be compared correctly and objectively. That is why we have chosen to certify C.H.I.C. products with EPD: a guarantee of reliability recognised worldwide.*



# A MINIMALIST BUILDING


By combining **Giesse** hardware with **Schlegel** seals and **Reguitti** designer handles, it is possible to create high-performance minimalist windows exclusively using our Group's accessories.



Discover the Supra7 window handles without base



Discover the range of minimalist handles

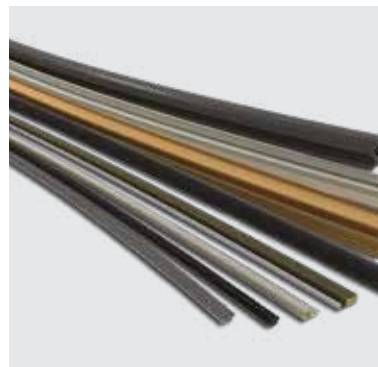

Discover the coloured seals that fit every profile



**Roberta Rizzo**  
Head of Product Management

*Architectural trends, both present and emerging, are driving the creation of striking structures that emphasize innovative and minimalist construction. This shift has sparked a growing demand for accessories tailored to windows with expansive glazed surfaces.*

*Minimalist window designs have become the go-to choice, offering optimal glass exposure, sleek aesthetics, and compliance with building performance standards. We are committed to delivering cutting-edge solutions across our product portfolio, addressing the diverse needs of our customers.*

# THE RANGE

## Single tilt-and-turn window (standard and Logica)



**SHIELDMAX5**

Code	Description	Microventilation	Notes
<b>C.H.I.C. 100 kg for Euro Groove</b>			
043551	C.H.I.C. – Kit T/T Hinges + T1 RH arm	Yes	L = 470 – 700 mm
043552	C.H.I.C. – Kit T/T Hinges + T1 LH arm	Yes	L = 470 – 700 mm
043591	C.H.I.C. – Kit T/T Hinges + T1 RH arm	No	L = 445 – 470 mm
043592	C.H.I.C. – Kit T/T Hinges + T1 LH arm	No	L = 445 – 470 mm
043561	C.H.I.C. – Kit T/T Hinges + T2 RH arm	Yes	L = 600 – 1500 mm
043562	C.H.I.C. – Kit T/T Hinges + T2 LH arm	Yes	L = 600 – 1500 mm
04357	Additional arm fastening mechanism		
<b>C.H.I.C. 150 kg for Euro Groove</b>			
043651	C.H.I.C. – Kit T/T Hinges + T1 RH arm	Yes	L = 472 – 700 mm
043652	C.H.I.C. – Kit T/T Hinges + T1 LH arm	Yes	L = 472 – 700 mm
043661	C.H.I.C. – Kit T/T Hinges + T2 RH arm	Yes	L = 600 – 1500 mm
043662	C.H.I.C. – Kit T/T Hinges + T2 LH arm	Yes	L = 600 – 1500 mm
01348K	Single striker		
<b>C.H.I.C. 130 kg for R Groove</b>			
052841	C.H.I.C. – Kit T/T Hinges + T1 RH arm	No	L = 450 – 475 mm
052842	C.H.I.C. – Kit T/T Hinges + T1 LH arm	No	L = 450 – 475 mm
052851	C.H.I.C. – Kit T/T Hinges + T1 RH arm	Yes	L = 475 – 700 mm
052852	C.H.I.C. – Kit T/T Hinges + T1 LH arm	Yes	L = 475 – 700 mm
052861	C.H.I.C. – Kit T/T Hinges + T2 RH arm	Yes	L = 600 – 1600 mm
052862	C.H.I.C. – Kit T/T Hinges + T2 LH arm	Yes	L = 600 – 1600 mm
05287	Additional arm fastening mechanism		

## Side-hung sash, secondary sash and ventilation sash



**SHIELDMAX5**

Code	Description	Notes
<b>C.H.I.C. 100 kg for Euro Groove</b>		
043541	C.H.I.C. – RH Side-Hung Sash Hinge Kit	L = 160 – 1500 mm
043542	C.H.I.C. – LH Side-Hung Sash Hinge Kit	L = 160 – 1500 mm
<b>C.H.I.C. 150 kg for Euro Groove</b>		
043641	C.H.I.C. – RH Side-Hung Sash Hinge Kit	L > 300 mm
043642	C.H.I.C. – LH Side-Hung Sash Hinge Kit	L > 300 mm
05288	Adjustable fastening element	H > 1200 mm
<b>C.H.I.C. 130 kg for R Groove</b>		
052831	C.H.I.C. – RH Side-Hung Sash Hinge Kit	L = 200 – 1600 mm
052832	C.H.I.C. – LH Side-Hung Sash Hinge Kit	L = 200 – 1600 mm
05288	Adjustable fastening element	

## Bottom-hung window



Code	Description	Notes
<b>C.H.I.C. Bottom-hung window 250 kg for Euro Groove</b>		
04362	C.H.I.C. – Bottom-Hung Window Hinge Kit	L < 2500 mm
04363	C.H.I.C. – Bottom-Hung Window Lifting Element <sup>1</sup>	
<b>C.H.I.C. Bottom-hung window 250 kg for R Groove</b>		
05295	C.H.I.C. – Bottom-Hung Window Hinge Kit	L < 2500 mm
05296	C.H.I.C. – Bottom-Hung Window Lifting Element <sup>1</sup>	

<sup>1</sup> to be added to the Hinge Kit for doors larger than 1500 mm

## Entrance door



Code	Description	Notes
<b>C.H.I.C. Door for Euro Groove</b>		
00698020	C.H.I.C. Door EG - 10/14 frame	Anodized silver
00698190	C.H.I.C. Door EG - 10/14 frame	Anodized black
00725020	C.H.I.C. Door EG - 14/18 frame	Anodized silver
00725190	C.H.I.C. Door EG - 14/18 frame	Anodized black
02030000K	Fritz limitation arm <sup>2</sup>	
<b>C.H.I.C. Door for R Groove</b>		
00726020	C.H.I.C. Door RG	Anodized silver
00726190	C.H.I.C. Door RG	Anodized black
02034000K	Fritz limitation arm <sup>2</sup>	
<b>C.H.I.C. Door for Groove 16</b>		
00695020	C.H.I.C. Door ALU16 (9 mm offset) - 14/18 frame	Anodized silver
00696020	C.H.I.C. Door ALU16 (16 mm offset) - 14/18 frame	Anodized silver
00697020	C.H.I.C. Door ALU16 (9 mm offset) - 10/14 frame	Anodized silver
<b>C.H.I.C. Door for overlap door systems without channel</b>		
00753020	C.H.I.C. Door 160	Anodized silver
00753190	C.H.I.C. Door 160	Anodized black
00757	Thickness 1mm <sup>3</sup>	
<b>C.H.I.C. Door for flush door systems without channel</b>		
00750020	C.H.I.C. Door 160	Anodized silver
00750190	C.H.I.C. Door 160	Anodized black
00757	Thickness 1mm <sup>3</sup>	

<sup>2</sup> recommended to limit maximum door opening (105°)

<sup>3</sup> stackable up to a maximum of 3mm (for systems with sash/frame distance >16mm)

**HARDWARE  
SOLUTIONS**

**EXTRUDED  
SOLUTIONS**

**CUSTOM  
SOLUTIONS**



**HOUSTON**  
HEADQUARTERS



**1927**  
FOUNDATION



**7.000+**  
EMPLOYEES



**90+**  
MARKETS



**60+**  
GLOBAL LOCATIONS



Contact Us

**QUANEX-INTERNATIONAL.COM**  
**QUANEX.COM**



U1116401 - 05/2026